

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P793861

Luminaire Tested: LER6D55D010-EC6DR4055659040-6LBS1LI

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P793861
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-28)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D55D010-EC6DR4055659040-6LBS1LI
Description: 6 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 40° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7946.7 lumens
Efficiency: N/A
Efficacy: 136.5 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.6
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 58.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P793861
CATALOG NUMBER: LER6D55D010-EC6DR4055659040-6LBS1LI

Luminous Intensity Polar Plot

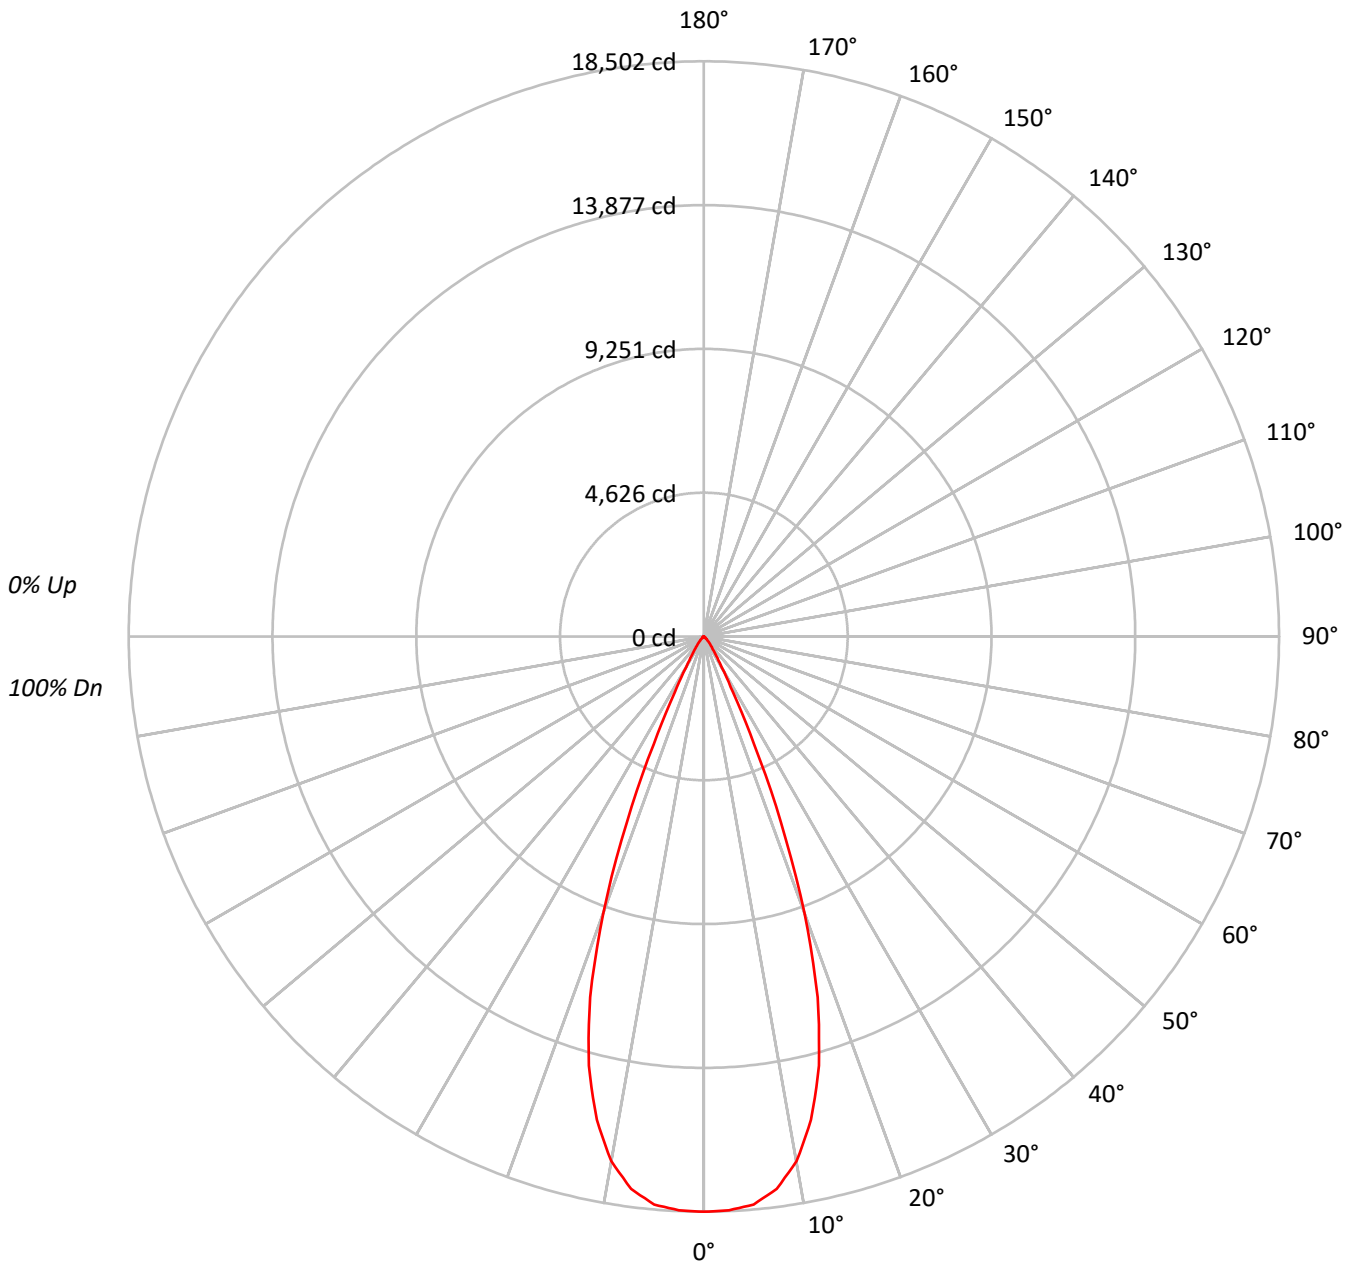



TEST NUMBER: P793861

CATALOG NUMBER: LER6D55D010-EC6DR4055659040-6LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100	100	100													
	1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	97	96	96	96	96	96	96													
	2	110	106	103	100	108	105	102	99	102	99	97	99	97	95	96	95	93	92	92	92	92	92	92													
	3	106	101	97	94	104	100	96	93	97	94	92	95	93	90	93	91	89	88	88	88	88	88	88													
	4	102	97	92	89	101	95	91	88	93	90	87	92	89	86	90	87	85	84	84	84	84	84	84													
	5	99	92	88	84	97	91	87	84	90	86	83	88	85	83	87	84	82	81	81	81	81	81	81													
	6	95	88	84	80	94	88	83	80	86	82	80	85	82	79	84	81	79	77	77	77	77	77	77													
	7	92	85	80	77	91	84	80	77	83	79	76	82	79	76	81	78	76	74	74	74	74	74	74													
	8	89	82	77	74	88	81	77	74	80	76	73	79	76	73	78	75	73	72	72	72	72	72	72													
	9	86	79	74	71	85	78	74	71	77	73	71	76	73	70	76	72	70	69	69	69	69	69	69													
	10	83	76	71	68	82	75	71	68	75	71	68	74	70	68	73	70	68	67	67	67	67	67	67													

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2021553
5°	2011727
10°	1901519
15°	1616539
20°	1101790
25°	459716
30°	144545
35°	67185
40°	37155
45°	17028
50°	8261
55°	4534
60°	2360
65°	827
70°	351
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 17028 cd/sqm



TEST NUMBER: P793861

CATALOG NUMBER: LER6D55D010-EC6DR4055659040-6LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1712.7	21.6
10°-20°	3836.9	48.3
20°-30°	1920.6	24.2
30°-40°	352.1	4.4
40°-50°	97.1	1.2
50°-60°	22.8	0.3
60°-70°	4.4	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	7470.2	94.0
0°-40°	7822.3	98.4
0°-60°	7942.2	99.9
0°-90°	7946.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7946.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	18502	
5°	18342	###
15°	14291	3837
25°	3813	1921
35°	504	352
45°	110	97
55°	24	23
65°	3	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P793861

CATALOG NUMBER: LER6D55D010-EC6DR4055659040-6LBS1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	18502.1
2.5°	18475.0
5°	18342.1
7.5°	17918.4
10°	17139.1
12.5°	15924.2
15°	14291.1
17.5°	12167.2
20°	9475.9
22.5°	6460.3
25°	3813.3
27.5°	2015.8
30°	1145.7
32.5°	740.4
35°	503.7
37.5°	359.9
40°	260.5
42.5°	178.3
45°	110.2
47.5°	70.3
50°	48.6
52.5°	34.6
55°	23.8
57.5°	15.1
60°	10.8
62.5°	6.5
65°	3.2
67.5°	2.2
70°	1.1
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)