

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P793891

Luminaire Tested: LER6D55D010-EC6DR4555659030-6LBS1B

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P793891  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D55D010-EC6DR4555659030-6LBS1B  
Description: 6 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 45° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6574.0 lumens  
Efficiency: N/A  
Efficacy: 113.0 lumens/watt  
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 58.2  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P793891

CATALOG NUMBER: LER6D55D010-EC6DR4555659030-6LBS1B

### Luminous Intensity Polar Plot

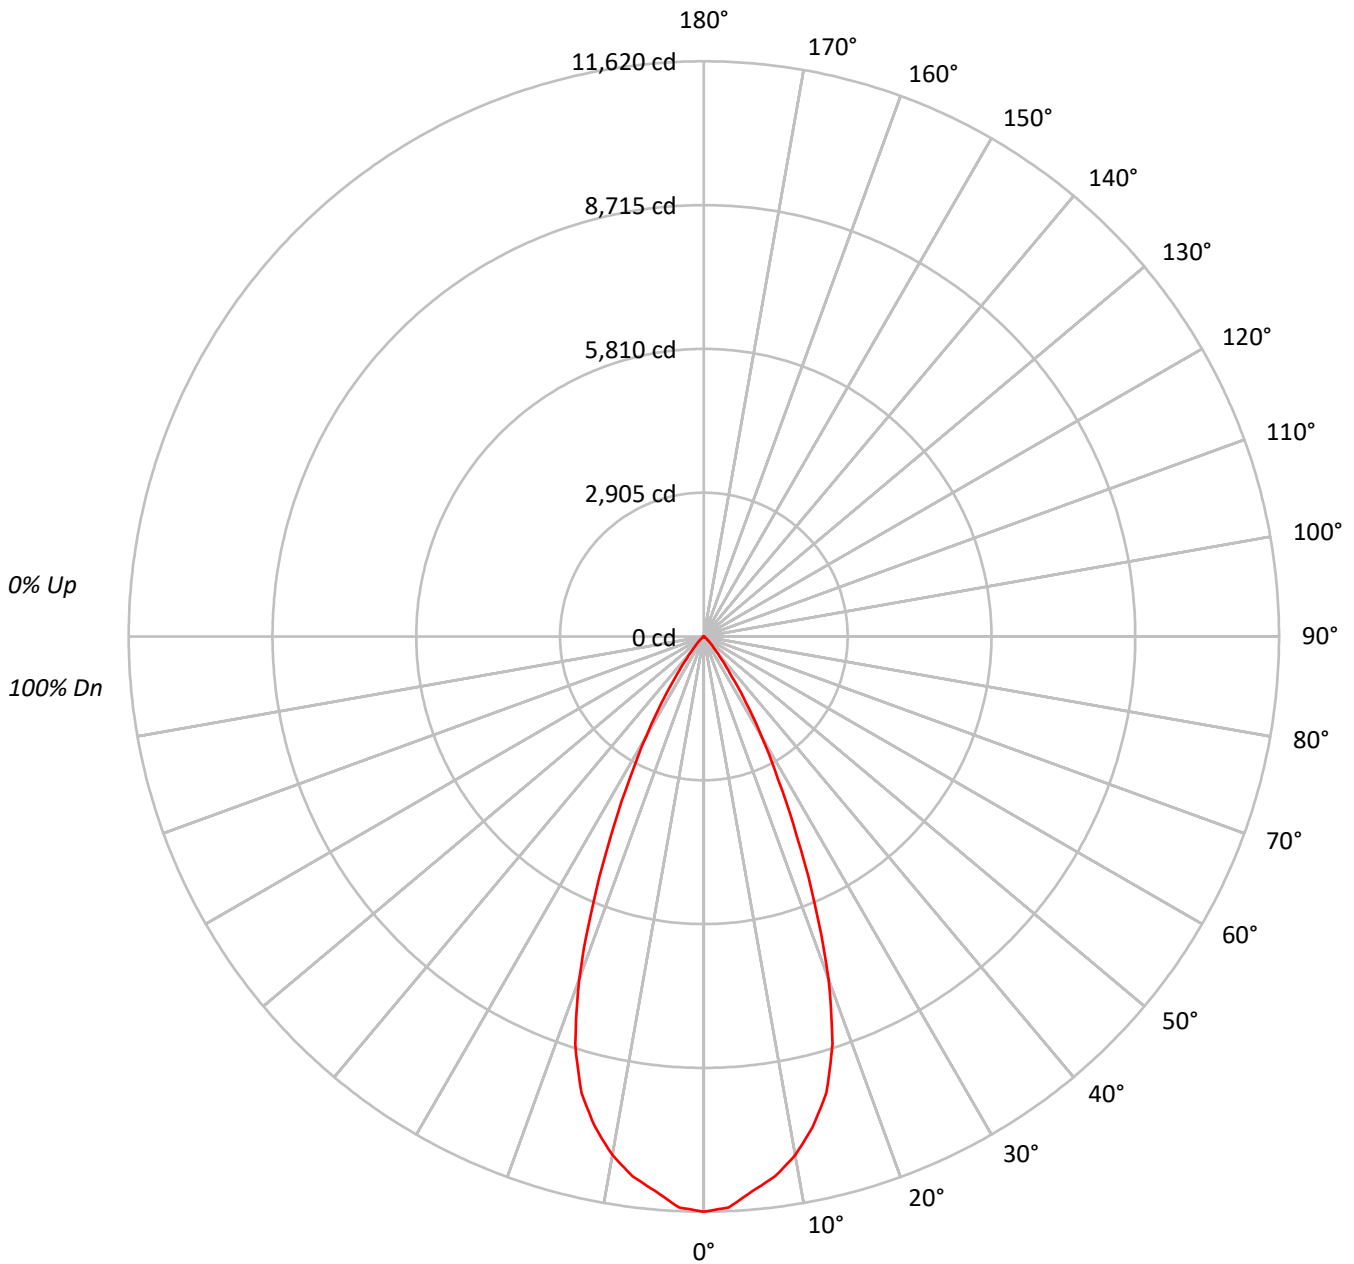



TEST NUMBER: P793891

CATALOG NUMBER: LER6D55D010-EC6DR4555659030-6LBS1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |    |    |     |   |  |  |  |    |  |  |  |  |  |  |  |  |   |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|----|-----|---|--|--|--|----|--|--|--|--|--|--|--|--|---|
| RF  | 20  |     |     |     |     |     |     |     |     | 20  |     |     |     |     |     |     |     |     | 20 |    |    |    |     |   |  |  |  | 20 |  |  |  |  |  |  |  |  |   |
| RC  | 80  |     |     |     |     |     |     |     |     | 50  |     |     |     |     |     |     |     |     | 30 |    |    |    |     |   |  |  |  | 10 |  |  |  |  |  |  |  |  | 0 |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 50 | 30 | 10  | 0 |  |  |  |    |  |  |  |  |  |  |  |  |   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |    |    |     |   |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |    |    | 100 |   |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 1   | 114 | 112 | 110 | 108 | 112 | 110 | 108 | 106 | 106 | 104 | 103 | 102 | 101 | 100 | 98  | 98  | 97  | 95  |    |    |    |    | 95  |   |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 2   | 109 | 105 | 102 | 99  | 107 | 103 | 100 | 98  | 100 | 98  | 95  | 97  | 95  | 93  | 95  | 93  | 91  | 90  |    |    |    |    | 90  |   |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 3   | 105 | 99  | 95  | 91  | 103 | 98  | 94  | 91  | 95  | 92  | 89  | 93  | 90  | 88  | 91  | 89  | 87  | 85  |    |    |    |    | 85  |   |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 4   | 100 | 94  | 89  | 85  | 99  | 93  | 88  | 85  | 91  | 87  | 84  | 89  | 86  | 83  | 87  | 84  | 82  | 81  |    |    |    |    | 81  |   |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 5   | 96  | 89  | 84  | 80  | 95  | 88  | 83  | 80  | 86  | 82  | 79  | 85  | 81  | 79  | 83  | 80  | 78  | 77  |    |    |    |    | 77  |   |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 6   | 92  | 85  | 80  | 76  | 91  | 84  | 79  | 76  | 83  | 78  | 75  | 81  | 77  | 75  | 80  | 77  | 74  | 73  |    |    |    |    | 73  |   |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 7   | 89  | 81  | 75  | 72  | 87  | 80  | 75  | 72  | 79  | 74  | 71  | 78  | 74  | 71  | 77  | 73  | 71  | 69  |    |    |    |    | 69  |   |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 8   | 85  | 77  | 72  | 68  | 84  | 76  | 71  | 68  | 75  | 71  | 68  | 74  | 70  | 67  | 73  | 70  | 67  | 66  |    |    |    |    | 66  |   |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 9   | 82  | 73  | 68  | 65  | 81  | 73  | 68  | 65  | 72  | 68  | 65  | 71  | 67  | 64  | 71  | 67  | 64  | 63  |    |    |    |    | 63  |   |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 10  | 79  | 70  | 65  | 62  | 78  | 70  | 65  | 62  | 69  | 65  | 62  | 68  | 64  | 61  | 68  | 64  | 61  | 60  |    |    |    |    | 60  |   |  |  |  |    |  |  |  |  |  |  |  |  |   |

**AVERAGE LUMINANCE (cd/sqm):**

|     |         |
|-----|---------|
|     | 0°      |
| 0°  | 1269577 |
| 5°  | 1233429 |
| 10° | 1180058 |
| 15° | 1080011 |
| 20° | 856815  |
| 25° | 534919  |
| 30° | 294831  |
| 35° | 132382  |
| 40° | 52145   |
| 45° | 24568   |
| 50° | 11644   |
| 55° | 6096    |
| 60° | 2994    |
| 65° | 698     |
| 70° | 288     |
| 75° | 0       |
| 80° | 0       |
| 85° | 0       |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 24568 cd/sqm



TEST NUMBER: P793891

CATALOG NUMBER: LER6D55D010-EC6DR4555659030-6LBS1B

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 1056.7 | 16.1      |
| 10°-20°   | 2600.6 | 39.6      |
| 20°-30°   | 2059.4 | 31.3      |
| 30°-40°   | 685.8  | 10.4      |
| 40°-50°   | 136.1  | 2.1       |
| 50°-60°   | 30.9   | 0.5       |
| 60°-70°   | 4.4    | 0.1       |
| 70°-80°   | 0.1    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 5716.6 | 87.0      |
| 0°-40°    | 6402.4 | 97.4      |
| 0°-60°    | 6569.4 | 99.9      |
| 0°-90°    | 6574.0 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 6574.0 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°    | Flux |
|-----|-------|------|
| 0°  | 11620 |      |
| 5°  | 11246 | ###  |
| 15° | 9548  | 2601 |
| 25° | 4437  | 2059 |
| 35° | 992   | 686  |
| 45° | 159   | 136  |
| 55° | 32    | 31   |
| 65° | 3     | 4    |
| 75° | 0     | 0    |
| 85° | 0     | 0    |
| 90° | 0     |      |



TEST NUMBER: P793891

CATALOG NUMBER: LER6D55D010-EC6DR4555659030-6LBS1B

**CANDELA DISTRIBUTION (FULL):**

|       | 0°      |
|-------|---------|
| 0°    | 11619.7 |
| 2.5°  | 11543.9 |
| 5°    | 11245.9 |
| 7.5°  | 11000.1 |
| 10°   | 10636.3 |
| 12.5° | 10152.0 |
| 15°   | 9547.9  |
| 17.5° | 8639.4  |
| 20°   | 7369.0  |
| 22.5° | 5855.6  |
| 25°   | 4437.1  |
| 27.5° | 3249.0  |
| 30°   | 2336.9  |
| 32.5° | 1589.3  |
| 35°   | 992.5   |
| 37.5° | 588.6   |
| 40°   | 365.6   |
| 42.5° | 240.4   |
| 45°   | 159.0   |
| 47.5° | 102.4   |
| 50°   | 68.5    |
| 52.5° | 45.7    |
| 55°   | 32.0    |
| 57.5° | 21.0    |
| 60°   | 13.7    |
| 62.5° | 7.3     |
| 65°   | 2.7     |
| 67.5° | 0.9     |
| 70°   | 0.9     |
| 72.5° | 0.0     |
| 75°   | 0.0     |
| 77.5° | 0.0     |
| 80°   | 0.0     |
| 82.5° | 0.0     |
| 85°   | 0.0     |
| 87.5° | 0.0     |
| 90°   | 0.0     |

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)