

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P793959

Luminaire Tested: LER6D55D010-EC6DR5055659050-6LBDP1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P793959
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D55D010-EC6DR5055659050-6LBDP1B
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 50° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6416.4 lumens
Efficiency: N/A
Efficacy: 110.2 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 58.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P793959

CATALOG NUMBER: LER6D55D010-EC6DR5055659050-6LBDP1B

Luminous Intensity Polar Plot

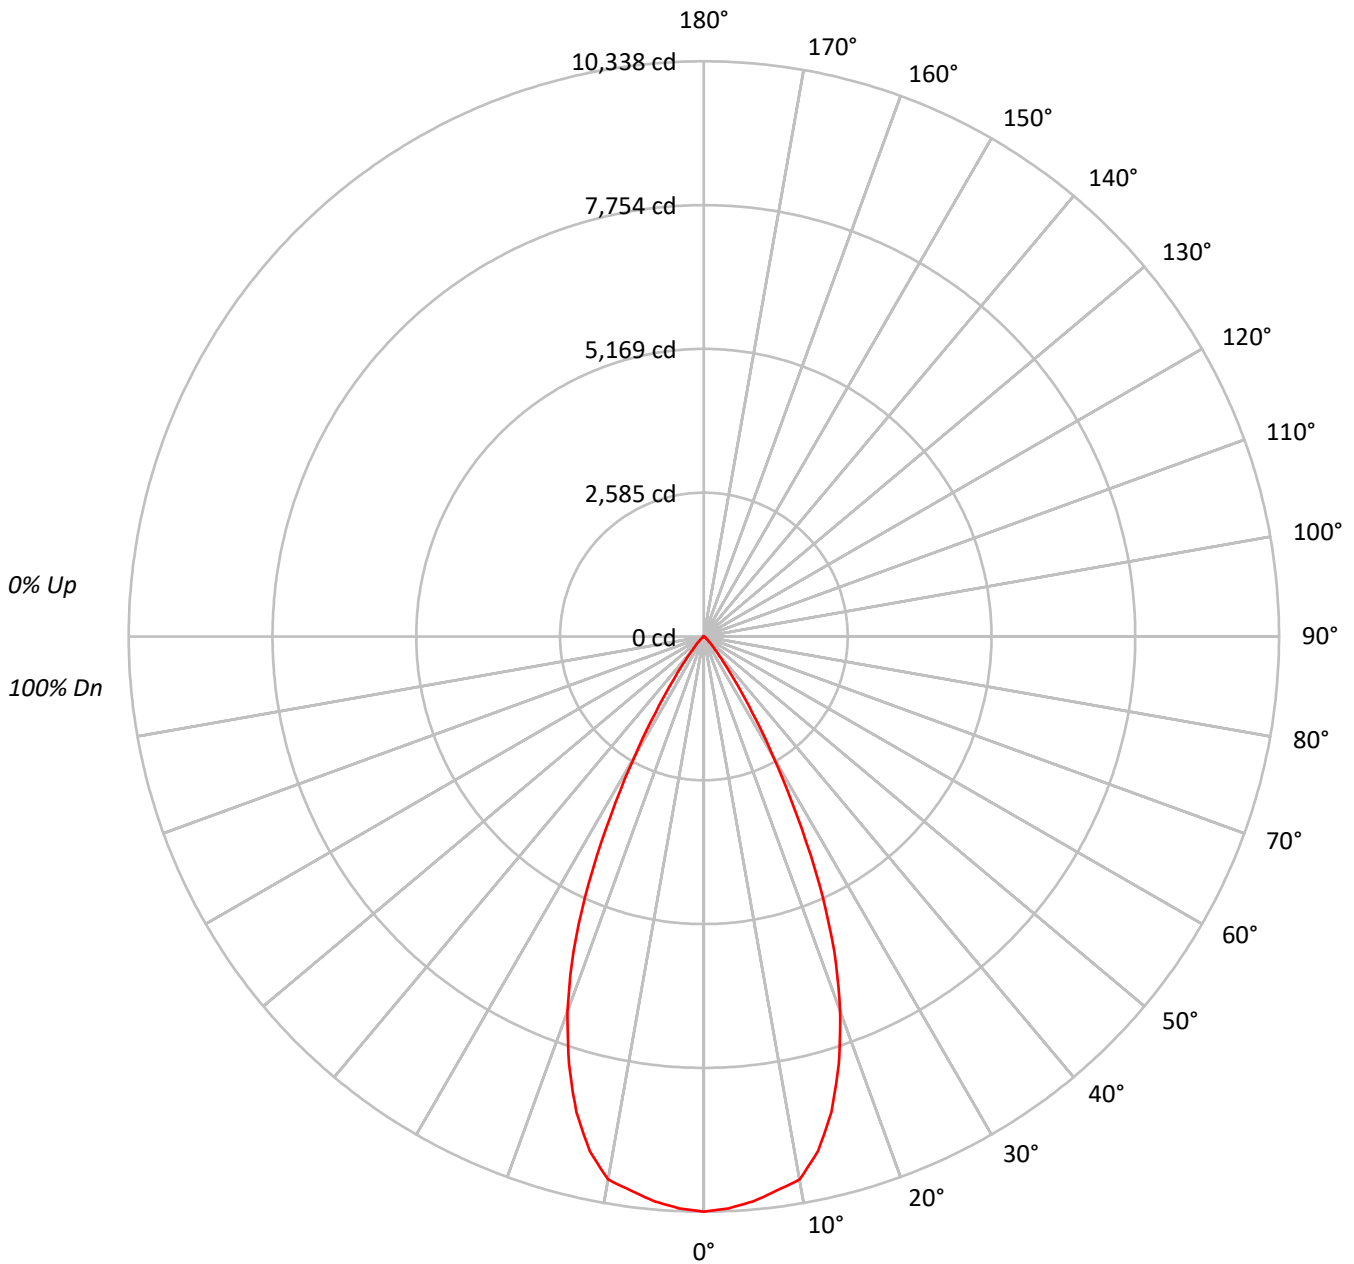



TEST NUMBER: P793959
 CATALOG NUMBER: LER6D55D010-EC6DR5055659050-6LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	114	112	109	107	112	110	108	106	106	104	102	102	101	99	98	97	97	95			95
2	109	105	101	98	107	103	100	97	100	98	95	97	95	93	95	93	91	90			90
3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	91	88	86	85			85
4	100	94	89	85	99	93	88	85	90	87	84	89	85	83	87	84	82	80			80
5	96	89	84	80	95	88	83	79	86	82	79	85	81	78	83	80	77	76			76
6	92	84	79	75	91	83	79	75	82	78	74	81	77	74	79	76	74	72			72
7	88	80	75	71	87	79	74	71	78	74	71	77	73	70	76	73	70	69			69
8	85	76	71	67	84	76	71	67	75	70	67	74	70	67	73	69	66	65			65
9	81	73	68	64	80	72	67	64	71	67	64	71	67	64	70	66	63	62			62
10	78	70	64	61	77	69	64	61	68	64	61	68	64	61	67	63	60	59			59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1129592
5°	1117741
10°	1099333
15°	1001034
20°	832979
25°	591291
30°	312974
35°	127541
40°	47367
45°	21679
50°	8890
55°	4648
60°	2294
65°	672
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 21679 cd/sqm



TEST NUMBER: P793959

CATALOG NUMBER: LER6D55D010-EC6DR5055659050-6LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	963.3	15.0
10°-20°	2434.4	37.9
20°-30°	2186.7	34.1
30°-40°	684.6	10.7
40°-50°	119.9	1.9
50°-60°	23.9	0.4
60°-70°	3.6	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5584.4	87.0
0°-40°	6269.0	97.7
0°-60°	6412.8	99.9
0°-90°	6416.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6416.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	10338	
5°	10191	963
15°	8850	2434
25°	4905	2187
35°	956	685
45°	140	120
55°	24	24
65°	3	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P793959

CATALOG NUMBER: LER6D55D010-EC6DR5055659050-6LBDP1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	10338.5
2.5°	10287.0
5°	10191.1
7.5°	10044.7
10°	9908.7
12.5°	9472.9
15°	8849.7
17.5°	8058.3
20°	7164.0
22.5°	6129.3
25°	4904.7
27.5°	3606.0
30°	2480.7
32.5°	1615.1
35°	956.2
37.5°	549.1
40°	332.1
42.5°	216.2
45°	140.3
47.5°	85.4
50°	52.3
52.5°	35.7
55°	24.4
57.5°	16.6
60°	10.5
62.5°	6.1
65°	2.6
67.5°	0.9
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)