

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P794002

Luminaire Tested: LER6D55D010-EC6DR5555659040-6LBDP1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P794002
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-52)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D55D010-EC6DR5555659040-6LBDP1MW
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 55° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6447.3 lumens
Efficiency: N/A
Efficacy: 110.8 lumens/watt
Spacing Criteria (0/90/45): 0.89 / 0.89 / 0.87
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 58.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P794002
CATALOG NUMBER: LER6D55D010-EC6DR5555659040-6LBDP1MW

Luminous Intensity Polar Plot

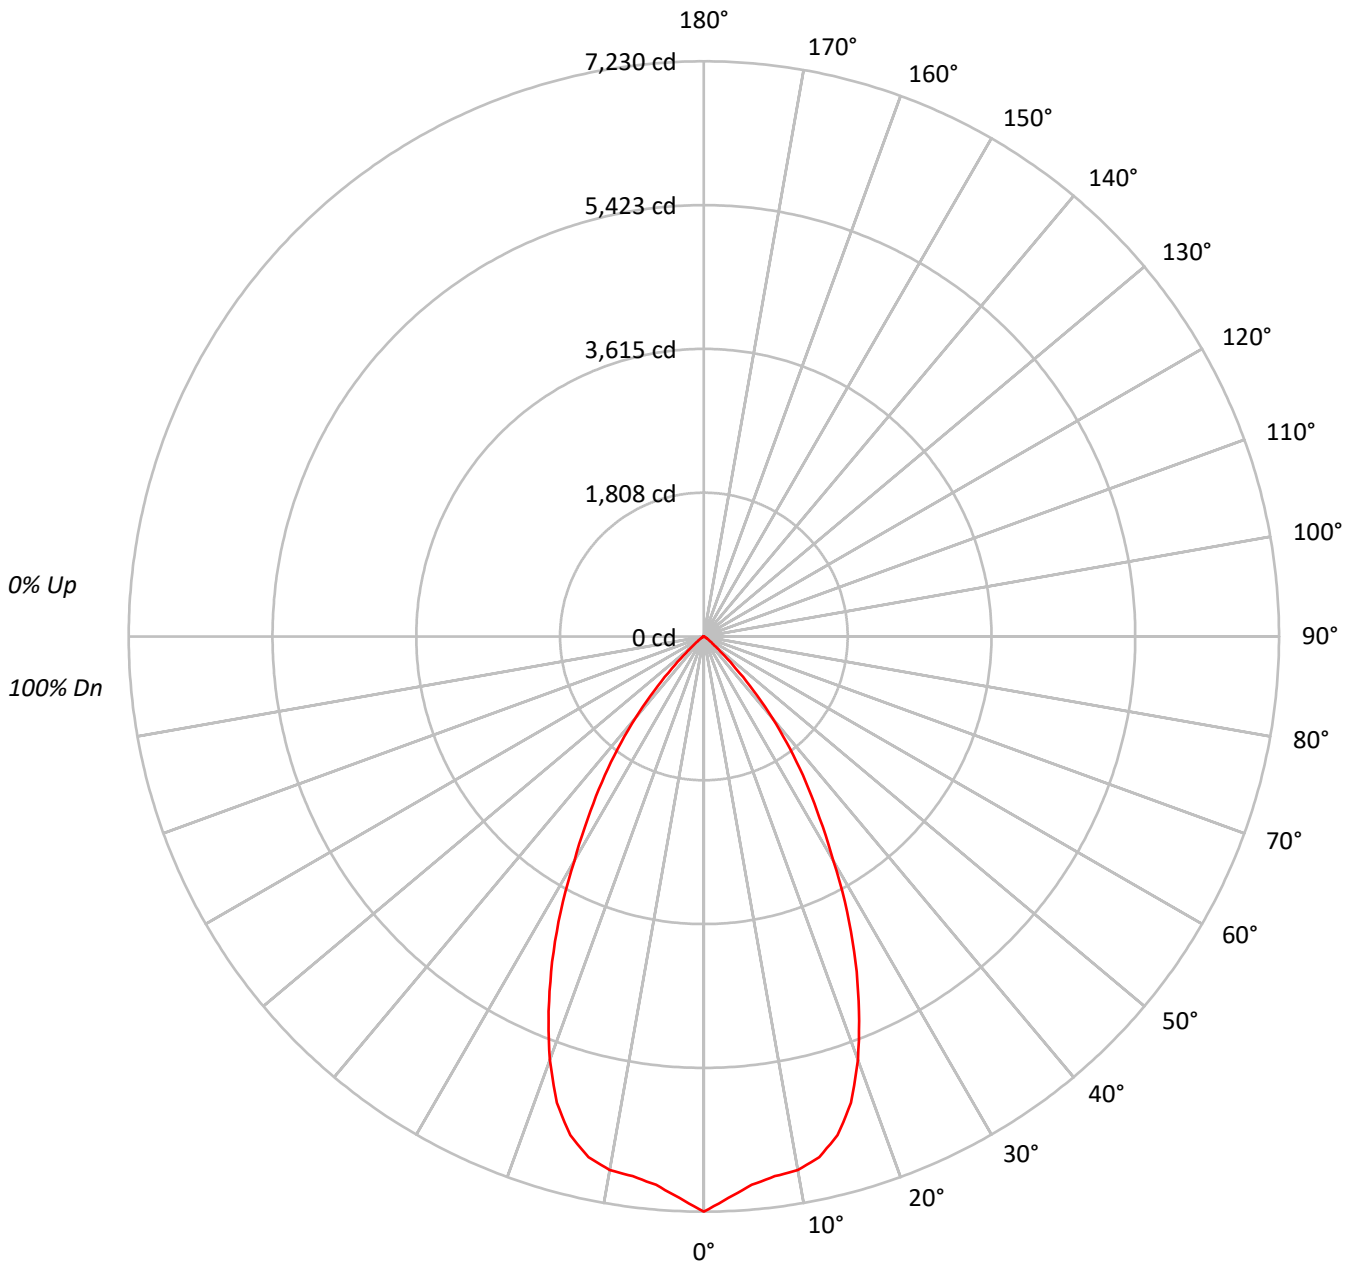



TEST NUMBER: P794002

CATALOG NUMBER: LER6D55D010-EC6DR5555659040-6LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94																			
2	108	103	99	96	106	101	98	95	98	95	92	95	93	90	92	90	89	87																			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81																			
4	97	90	84	80	95	88	83	79	86	82	78	84	81	78	82	79	77	75																			
5	92	84	78	74	91	83	77	73	81	76	73	79	75	72	78	74	71	70																			
6	88	79	73	68	86	78	72	68	76	71	68	75	70	67	74	70	67	65																			
7	83	74	68	64	82	73	67	63	72	67	63	71	66	63	70	65	62	61																			
8	79	69	63	59	78	69	63	59	68	63	59	67	62	59	66	62	58	57																			
9	75	66	60	56	74	65	59	55	64	59	55	63	58	55	62	58	55	54																			
10	72	62	56	52	71	61	56	52	61	56	52	60	55	52	59	55	52	50																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	789912
5°	758545
10°	755677
15°	733970
20°	658116
25°	543900
30°	410851
35°	297897
40°	190639
45°	87071
50°	28472
55°	12287
60°	5288
65°	698
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 87071 cd/sqm



TEST NUMBER: P794002

CATALOG NUMBER: LER6D55D010-EC6DR5555659040-6LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	658.1	10.2
10°-20°	1796.1	27.9
20°-30°	2046.8	31.7
30°-40°	1393.4	21.6
40°-50°	480.1	7.4
50°-60°	66.4	1.0
60°-70°	6.4	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4501.0	69.8
0°-40°	5894.4	91.4
0°-60°	6440.9	99.9
0°-90°	6447.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6447.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7230	
5°	6916	658
15°	6489	1796
25°	4512	2047
35°	2233	1393
45°	564	480
55°	64	66
65°	3	6
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P794002

CATALOG NUMBER: LER6D55D010-EC6DR5555659040-6LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	7229.6
2.5°	7063.9
5°	6916.1
7.5°	6843.5
10°	6811.2
12.5°	6703.7
15°	6488.7
17.5°	6147.4
20°	5660.1
22.5°	5097.5
25°	4511.6
27.5°	3901.5
30°	3256.5
32.5°	2710.0
35°	2233.4
37.5°	1780.1
40°	1336.6
42.5°	926.3
45°	563.5
47.5°	303.7
50°	167.5
52.5°	99.4
55°	64.5
57.5°	41.2
60°	24.2
62.5°	10.8
65°	2.7
67.5°	0.9
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)