

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P794078

Luminaire Tested: LER6D55D010-EC6DR6555659027-6LBS1MW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P794078  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D55D010-EC6DR6555659027-6LBS1MW  
Description: 6 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5539.3 lumens  
Efficiency: N/A  
Efficacy: 95.2 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96  
Luminous Opening: Circular (Dia: 0.48' x H: 0')  
CIE Type: Direct

Input Watts (W): 58.2  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P794078

CATALOG NUMBER: LER6D55D010-EC6DR6555659027-6LBS1MW

### Luminous Intensity Polar Plot

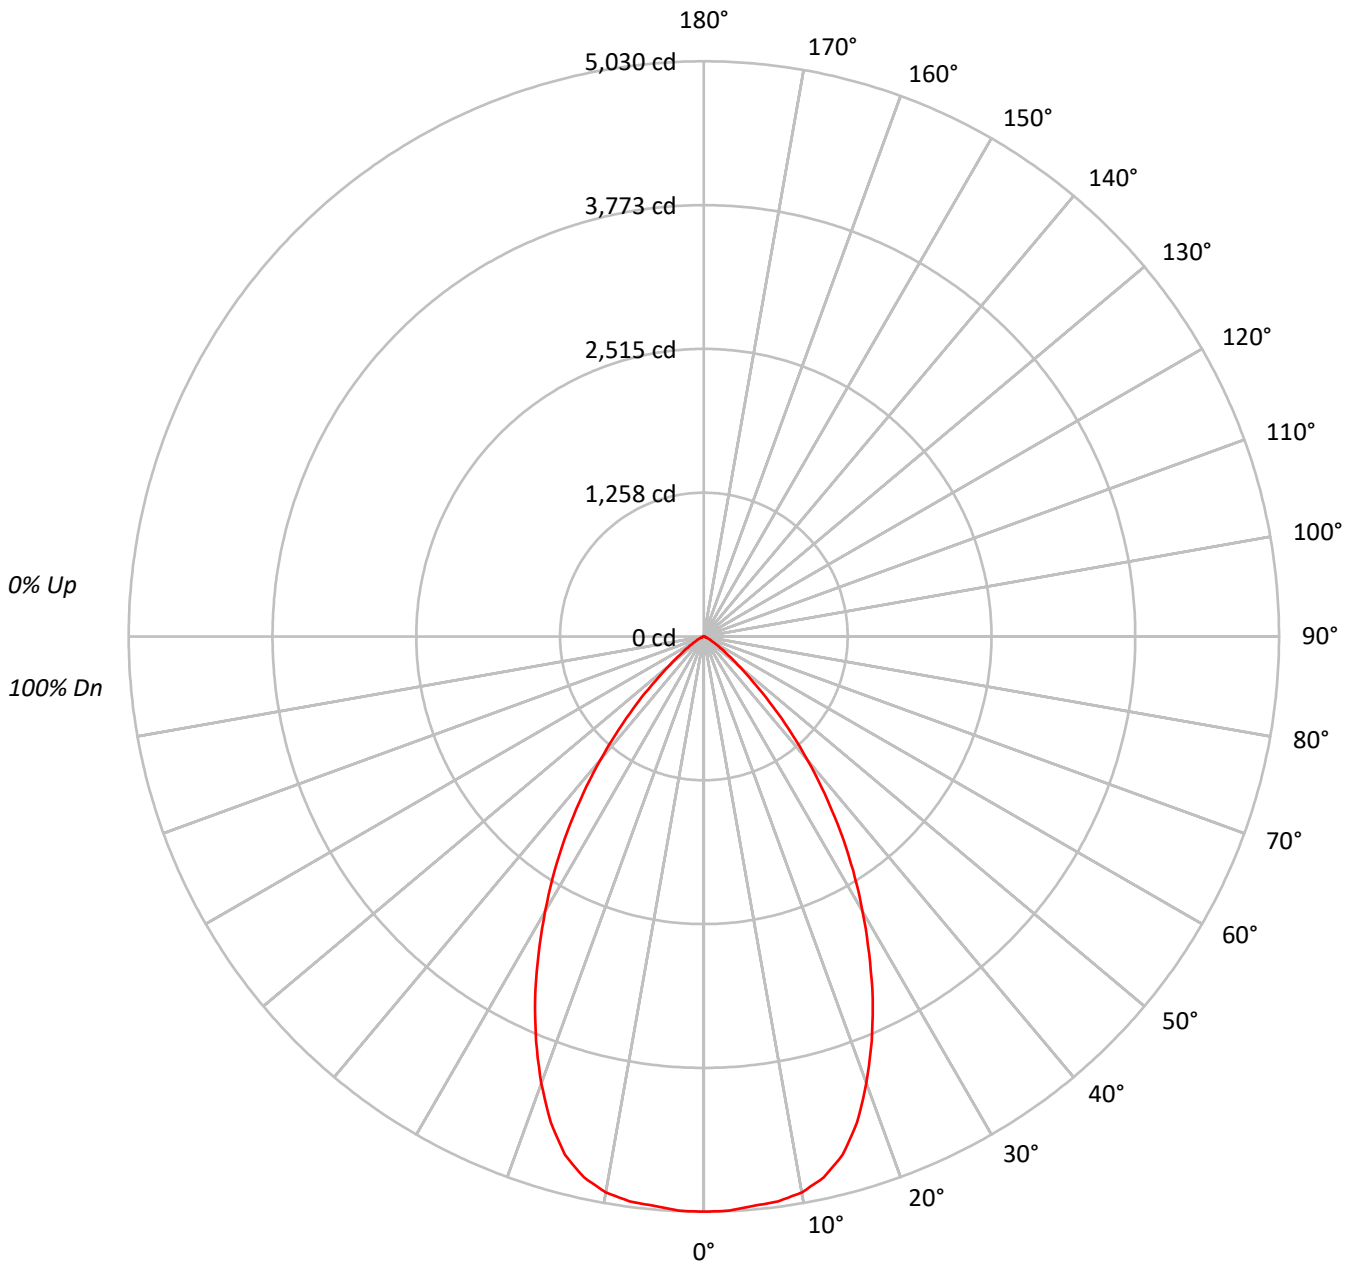



TEST NUMBER: P794078

CATALOG NUMBER: LER6D55D010-EC6DR6555659027-6LBS1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93			93																
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85																
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			78																
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72			72																
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66			66																
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61			61																
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56			56																
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52			52																
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49			49																
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46			46																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	293742
5°	293000
10°	292752
15°	283728
20°	258298
25°	225094
30°	187211
35°	148335
40°	107065
45°	67637
50°	35254
55°	18736
60°	9847
65°	5417
70°	2271
75°	2505
80°	1749
85°	1474

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 67637 cd/sqm



TEST NUMBER: P794078

CATALOG NUMBER: LER6D55D010-EC6DR6555659027-6LBS1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	475.6	8.6
10°-20°	1302.5	23.5
20°-30°	1592.1	28.7
30°-40°	1291.7	23.3
40°-50°	643.7	11.6
50°-60°	179.6	3.2
60°-70°	40.8	0.7
70°-80°	10.6	0.2
80°-90°	2.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3370.2	60.8
0°-40°	4661.9	84.2
0°-60°	5485.2	99.0
0°-90°	5539.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5539.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5030	
5°	4998	476
15°	4692	1302
25°	3493	1592
35°	2080	1292
45°	819	644
55°	184	180
65°	39	41
75°	11	11
85°	2	3
90°	0	



TEST NUMBER: P794078

CATALOG NUMBER: LER6D55D010-EC6DR6555659027-6LBS1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	5029.5
2.5°	5025.8
5°	4997.7
7.5°	4981.5
10°	4936.4
12.5°	4844.8
15°	4692.5
17.5°	4454.5
20°	4155.9
22.5°	3833.7
25°	3493.0
27.5°	3128.6
30°	2776.0
32.5°	2427.9
35°	2080.5
37.5°	1733.9
40°	1404.3
42.5°	1095.3
45°	818.9
47.5°	570.6
50°	388.0
52.5°	267.6
55°	184.0
57.5°	124.2
60°	84.3
62.5°	58.4
65°	39.2
67.5°	20.0
70°	13.3
72.5°	12.6
75°	11.1
77.5°	7.4
80°	5.2
82.5°	3.7
85°	2.2
87.5°	1.5
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)