

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P794112

Luminaire Tested: LER6D55D010-EC6DR7055659024-6LBDP1H

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P794112  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D55D010-EC6DR7055659024-6LBDP1H  
Description: 6 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5631.8 lumens  
Efficiency: N/A  
Efficacy: 96.8 lumens/watt  
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 58.2  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P794112  
CATALOG NUMBER: LER6D55D010-EC6DR7055659024-6LBDP1H

### Luminous Intensity Polar Plot

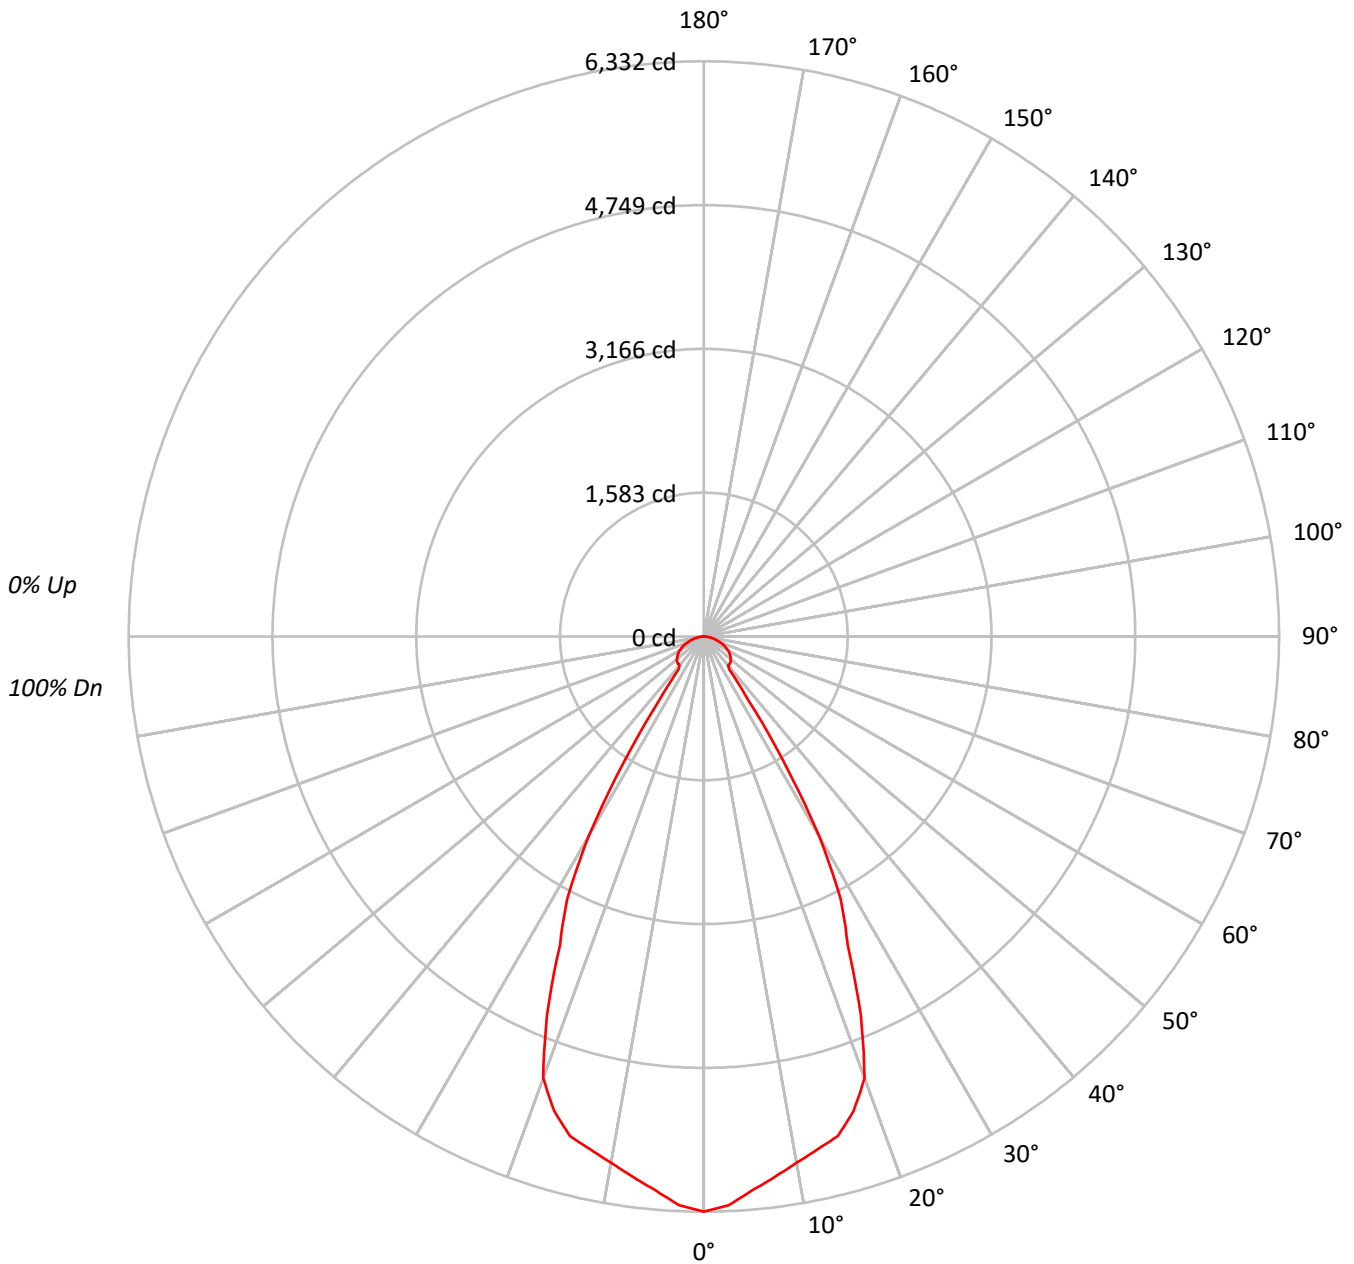



TEST NUMBER: P794112  
 CATALOG NUMBER: LER6D55D010-EC6DR7055659024-6LBDP1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|--|--|--|--|--|--|----|--|--|--|--|--|--|--|--|---|
| RF  | 20  |     |     |     |     |     |     |     |     | 20  |     |     |     |     |     |     |     |     | 20 |    |   |  |  |  |  |  |  | 20 |  |  |  |  |  |  |  |  |   |
| RC  | 80  |     |     |     |     |     |     |     |     | 50  |     |     |     |     |     |     |     |     | 30 |    |   |  |  |  |  |  |  | 10 |  |  |  |  |  |  |  |  | 0 |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0 |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 1   | 112 | 109 | 106 | 103 | 110 | 107 | 104 | 102 | 103 | 101 | 99  | 99  | 97  | 96  | 95  | 94  | 93  | 91  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 2   | 106 | 100 | 95  | 91  | 103 | 98  | 94  | 90  | 95  | 91  | 88  | 92  | 89  | 86  | 89  | 87  | 85  | 83  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 3   | 100 | 92  | 87  | 82  | 98  | 91  | 86  | 81  | 88  | 84  | 80  | 86  | 82  | 79  | 83  | 80  | 78  | 76  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 4   | 94  | 86  | 80  | 75  | 92  | 85  | 79  | 74  | 82  | 77  | 73  | 80  | 76  | 73  | 78  | 75  | 72  | 70  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 5   | 89  | 80  | 74  | 69  | 87  | 79  | 73  | 69  | 77  | 72  | 68  | 75  | 71  | 67  | 74  | 70  | 67  | 65  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 6   | 85  | 75  | 68  | 64  | 83  | 74  | 68  | 64  | 73  | 67  | 63  | 71  | 66  | 63  | 70  | 66  | 62  | 61  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 7   | 80  | 70  | 64  | 59  | 79  | 70  | 64  | 59  | 68  | 63  | 59  | 67  | 62  | 59  | 66  | 62  | 58  | 57  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 8   | 77  | 66  | 60  | 56  | 75  | 66  | 60  | 56  | 65  | 59  | 55  | 64  | 59  | 55  | 63  | 58  | 55  | 53  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 9   | 73  | 63  | 57  | 52  | 72  | 62  | 56  | 52  | 61  | 56  | 52  | 60  | 55  | 52  | 60  | 55  | 52  | 50  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 10  | 70  | 59  | 53  | 49  | 69  | 59  | 53  | 49  | 58  | 53  | 49  | 57  | 52  | 49  | 57  | 52  | 49  | 48  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 691817 |
| 5°  | 671252 |
| 10° | 652542 |
| 15° | 643987 |
| 20° | 601352 |
| 25° | 451759 |
| 30° | 319358 |
| 35° | 113122 |
| 40° | 59477  |
| 45° | 63352  |
| 50° | 65612  |
| 55° | 66843  |
| 60° | 67261  |
| 65° | 65822  |
| 70° | 62134  |
| 75° | 57539  |
| 80° | 51092  |
| 85° | 41495  |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 57.5°  
 Luminance: 67269 cd/sqm



TEST NUMBER: P794112

CATALOG NUMBER: LER6D55D010-EC6DR7055659024-6LBDP1H

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 577.3  | 10.3      |
| 10°-20°   | 1583.4 | 28.1      |
| 20°-30°   | 1743.9 | 31.0      |
| 30°-40°   | 666.3  | 11.8      |
| 40°-50°   | 314.6  | 5.6       |
| 50°-60°   | 312.8  | 5.6       |
| 60°-70°   | 250.4  | 4.4       |
| 70°-80°   | 143.9  | 2.6       |
| 80°-90°   | 39.1   | 0.7       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 3904.6 | 69.3      |
| 0°-40°    | 4570.9 | 81.2      |
| 0°-60°    | 5198.3 | 92.3      |
| 0°-90°    | 5631.8 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 5631.8 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 6332 |      |
| 5°  | 6120 | 577  |
| 15° | 5693 | 1583 |
| 25° | 3747 | 1744 |
| 35° | 848  | 666  |
| 45° | 410  | 315  |
| 55° | 351  | 313  |
| 65° | 255  | 250  |
| 75° | 136  | 144  |
| 85° | 33   | 39   |
| 90° | 0    |      |



TEST NUMBER: P794112

CATALOG NUMBER: LER6D55D010-EC6DR7055659024-6LBDP1H

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 6331.8 |
| 2.5°  | 6265.6 |
| 5°    | 6120.2 |
| 7.5°  | 5998.9 |
| 10°   | 5881.6 |
| 12.5° | 5782.4 |
| 15°   | 5693.2 |
| 17.5° | 5477.6 |
| 20°   | 5171.9 |
| 22.5° | 4512.2 |
| 25°   | 3747.3 |
| 27.5° | 3262.1 |
| 30°   | 2531.3 |
| 32.5° | 1635.1 |
| 35°   | 848.1  |
| 37.5° | 458.1  |
| 40°   | 417.0  |
| 42.5° | 414.0  |
| 45°   | 410.0  |
| 47.5° | 401.0  |
| 50°   | 386.0  |
| 52.5° | 368.9  |
| 55°   | 350.9  |
| 57.5° | 330.8  |
| 60°   | 307.8  |
| 62.5° | 281.7  |
| 65°   | 254.6  |
| 67.5° | 224.6  |
| 70°   | 194.5  |
| 72.5° | 164.4  |
| 75°   | 136.3  |
| 77.5° | 107.3  |
| 80°   | 81.2   |
| 82.5° | 57.1   |
| 85°   | 33.1   |
| 87.5° | 13.0   |
| 90°   | 0.0    |

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)