

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P794504

Luminaire Tested: LER6D60D010-EC6DR6055659027-6LBDP1H

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P794504
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D60D010-EC6DR6055659027-6LBDP1H
Description: 6 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6969.6 lumens
Efficiency: N/A
Efficacy: 108.2 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 64.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P794504
CATALOG NUMBER: LER6D60D010-EC6DR6055659027-6LBDP1H

Luminous Intensity Polar Plot

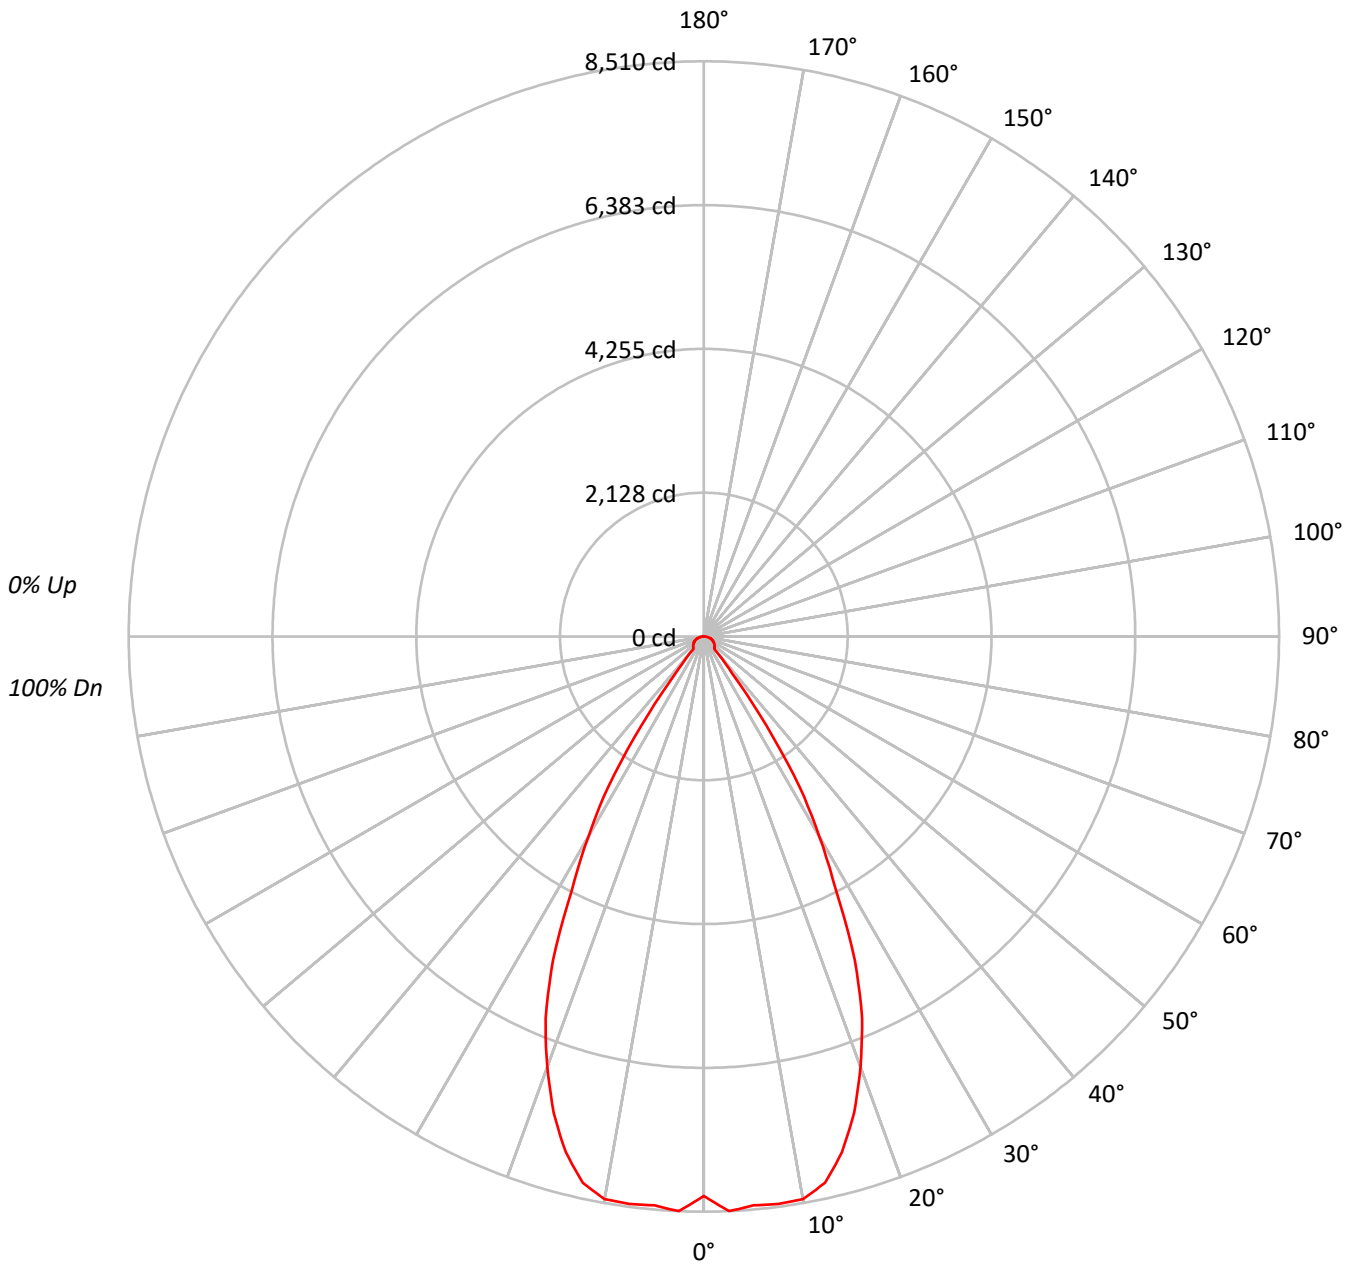



TEST NUMBER: P794504

CATALOG NUMBER: LER6D60D010-EC6DR6055659027-6LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93				93															
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86				86															
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80				80															
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75				75															
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70				70															
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66				66															
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62				62															
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59				59															
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55				55															
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53				53															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	904373
5°	926616
10°	937807
15°	893394
20°	787691
25°	637114
30°	430949
35°	215947
40°	35030
45°	34288
50°	34965
55°	35507
60°	36493
65°	37306
70°	38207
75°	38669
80°	37249
85°	31090

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 75°
 Luminance: 38669 cd/sqm



TEST NUMBER: P794504

CATALOG NUMBER: LER6D60D010-EC6DR6055659027-6LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	807.5	11.6
10°-20°	2184.6	31.3
20°-30°	2350.5	33.7
30°-40°	1021.7	14.7
40°-50°	171.6	2.5
50°-60°	166.9	2.4
60°-70°	142.7	2.0
70°-80°	95.5	1.4
80°-90°	28.6	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5342.6	76.7
0°-40°	6364.3	91.3
0°-60°	6702.8	96.2
0°-90°	6969.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6969.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8277	
5°	8448	807
15°	7898	2185
25°	5285	2350
35°	1619	1022
45°	222	172
55°	186	167
65°	144	143
75°	92	96
85°	25	29
90°	0	



TEST NUMBER: P794504

CATALOG NUMBER: LER6D60D010-EC6DR6055659027-6LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	8277.2
2.5°	8509.9
5°	8448.5
7.5°	8467.9
10°	8452.8
12.5°	8278.3
15°	7898.1
17.5°	7387.5
20°	6774.5
22.5°	6118.5
25°	5284.8
27.5°	4226.9
30°	3415.8
32.5°	2632.7
35°	1619.0
37.5°	692.6
40°	245.6
42.5°	226.2
45°	221.9
47.5°	214.4
50°	205.7
52.5°	196.1
55°	186.4
57.5°	176.7
60°	167.0
62.5°	156.2
65°	144.3
67.5°	132.5
70°	119.6
72.5°	105.6
75°	91.6
77.5°	75.4
80°	59.2
82.5°	42.0
85°	24.8
87.5°	8.6
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)