

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P794521

Luminaire Tested: LER6D60D010-EC6DR6055659035-6LBDP1LI

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P794521  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D60D010-EC6DR6055659035-6LBDP1LI  
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 60° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7618.6 lumens  
Efficiency: N/A  
Efficacy: 118.3 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 64.4  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P794521  
CATALOG NUMBER: LER6D60D010-EC6DR6055659035-6LBDP1LI

### Luminous Intensity Polar Plot

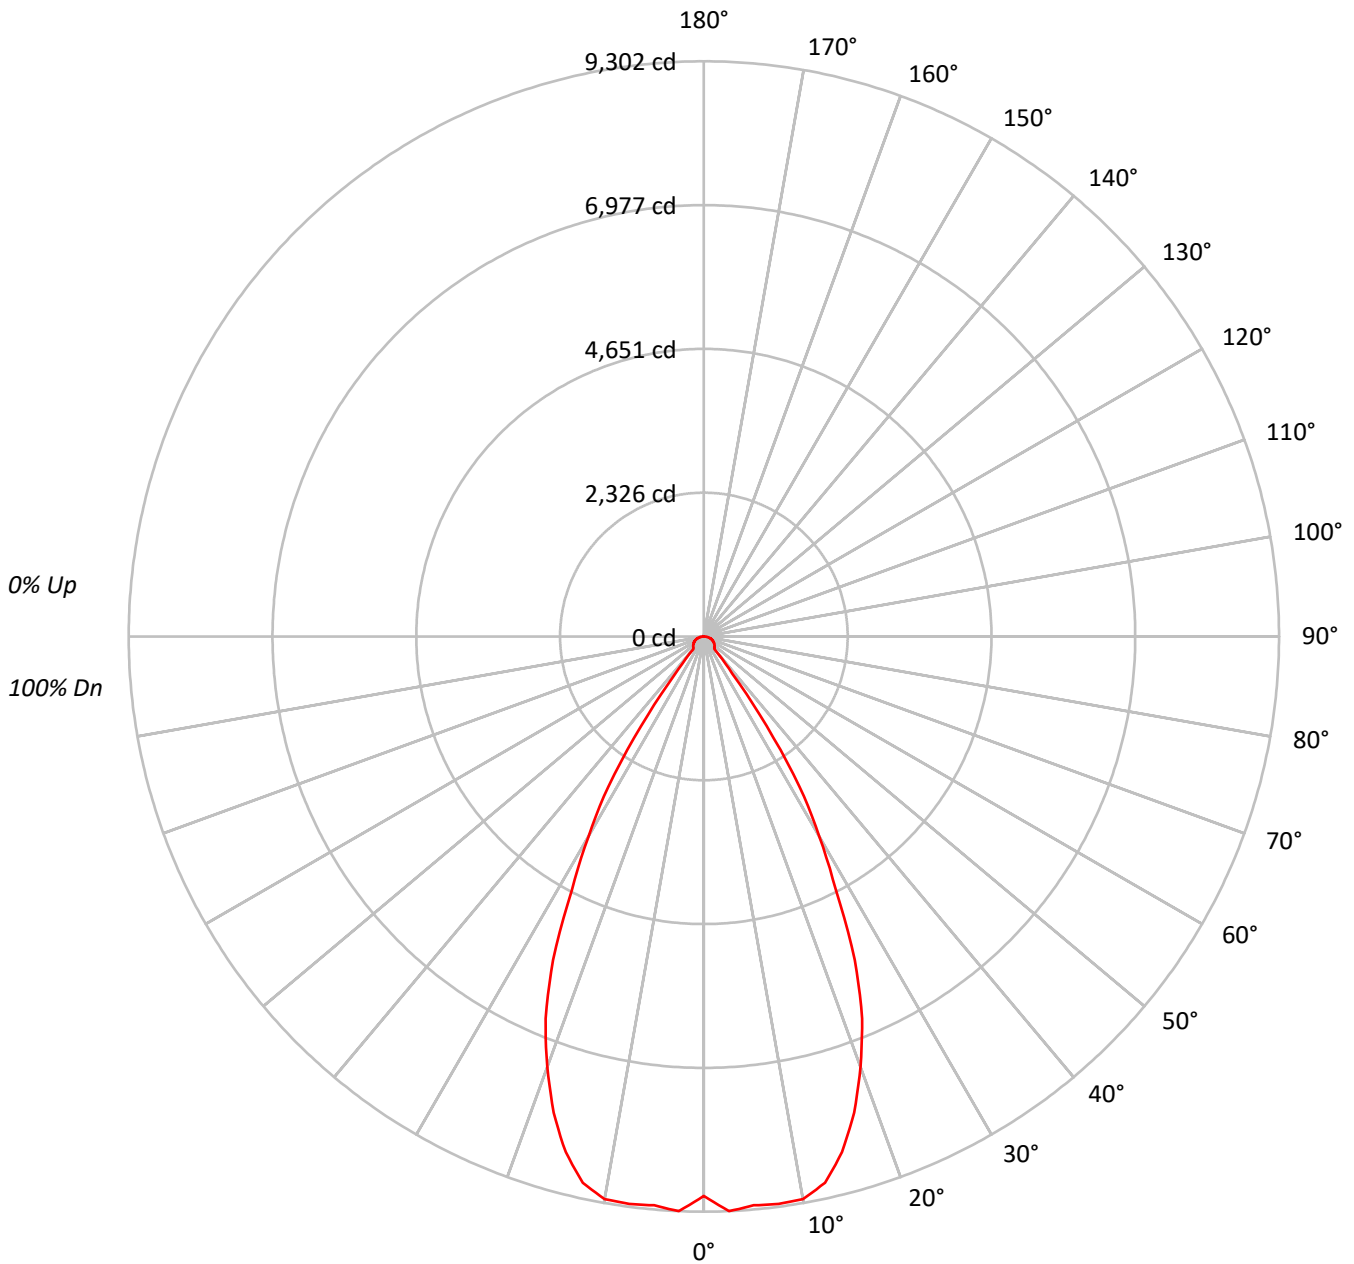



TEST NUMBER: P794521

CATALOG NUMBER: LER6D60D010-EC6DR6055659035-6LBDP1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93																			
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86																			
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80																			
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70																			
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66																			
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62																			
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59																			
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55																			
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	988602
5°	1012910
10°	1025144
15°	976590
20°	861047
25°	696439
30°	471082
35°	236061
40°	38296
45°	37486
50°	38228
55°	38803
60°	39880
65°	40797
70°	41753
75°	42257
80°	40773
85°	33973

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 75°  
 Luminance: 42257 cd/sqm



TEST NUMBER: P794521

CATALOG NUMBER: LER6D60D010-EC6DR6055659035-6LBDP1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	882.7	11.6
10°-20°	2388.1	31.3
20°-30°	2569.4	33.7
30°-40°	1116.9	14.7
40°-50°	187.6	2.5
50°-60°	182.4	2.4
60°-70°	156.0	2.0
70°-80°	104.4	1.4
80°-90°	31.2	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5840.1	76.7
0°-40°	6957.0	91.3
0°-60°	7327.0	96.2
0°-90°	7618.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7618.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	9048	
5°	9235	883
15°	8634	2388
25°	5777	2569
35°	1770	1117
45°	243	188
55°	204	182
65°	158	156
75°	100	104
85°	27	31
90°	0	



TEST NUMBER: P794521

CATALOG NUMBER: LER6D60D010-EC6DR6055659035-6LBDP1LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	9048.1
2.5°	9302.4
5°	9235.3
7.5°	9256.5
10°	9240.0
12.5°	9049.2
15°	8633.6
17.5°	8075.4
20°	7405.4
22.5°	6688.3
25°	5776.9
27.5°	4620.6
30°	3733.9
32.5°	2877.9
35°	1769.8
37.5°	757.1
40°	268.5
42.5°	247.3
45°	242.6
47.5°	234.3
50°	224.9
52.5°	214.3
55°	203.7
57.5°	193.1
60°	182.5
62.5°	170.7
65°	157.8
67.5°	144.8
70°	130.7
72.5°	115.4
75°	100.1
77.5°	82.4
80°	64.8
82.5°	45.9
85°	27.1
87.5°	9.4
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)