

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P794575

Luminaire Tested: LER6D60D010-EC6DR6555659040-6LBDP1B

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P794575
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D60D010-EC6DR6555659040-6LBDDP1B
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4943.3 lumens
Efficiency: N/A
Efficacy: 76.8 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 64.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P794575
CATALOG NUMBER: LER6D60D010-EC6DR6555659040-6LBDP1B

Luminous Intensity Polar Plot

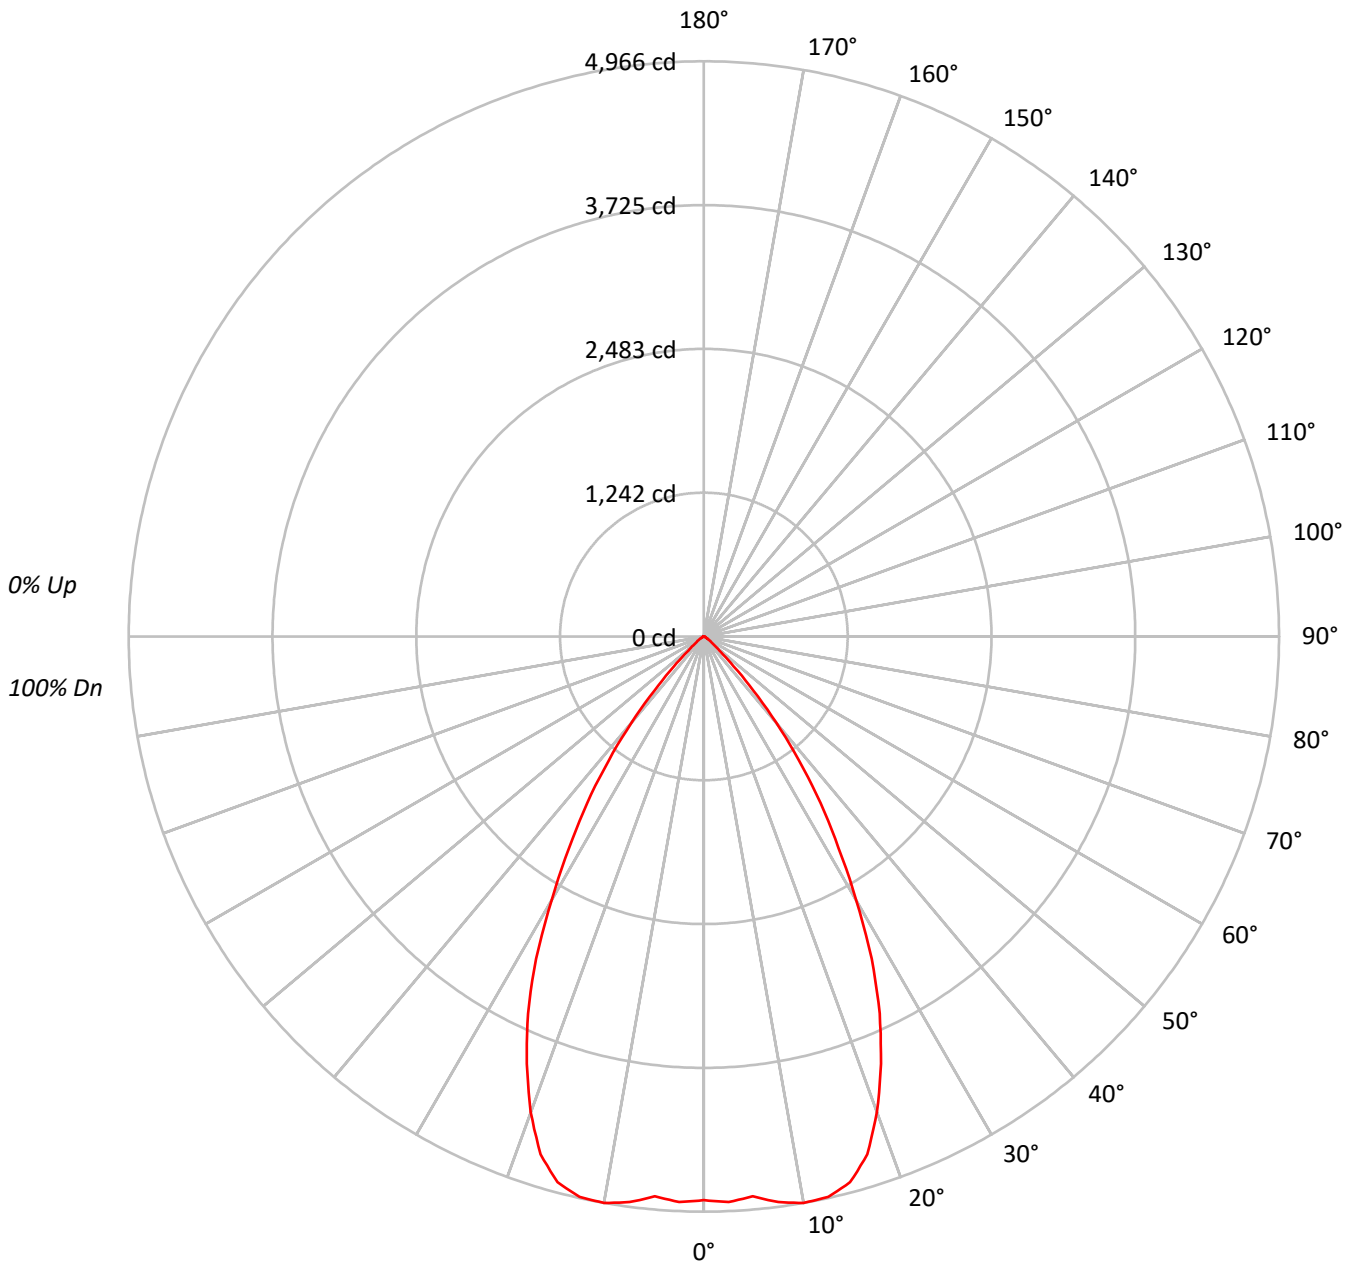



TEST NUMBER: P794575

CATALOG NUMBER: LER6D60D010-EC6DR6555659040-6LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69																			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65																			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60																			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57																			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53																			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	531783
5°	532213
10°	550959
15°	551866
20°	508089
25°	432916
30°	331406
35°	234140
40°	138208
45°	56106
50°	20347
55°	11334
60°	6490
65°	3568
70°	3770
75°	2913
80°	3020
85°	2633

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 56106 cd/sqm



TEST NUMBER: P794575

CATALOG NUMBER: LER6D60D010-EC6DR6555659040-6LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	468.7	9.5
10°-20°	1351.9	27.3
20°-30°	1622.0	32.8
30°-40°	1090.0	22.1
40°-50°	326.3	6.6
50°-60°	57.6	1.2
60°-70°	16.4	0.3
70°-80°	8.0	0.2
80°-90°	2.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3442.5	69.6
0°-40°	4532.5	91.7
0°-60°	4916.4	99.5
0°-90°	4943.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4943.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4867	
5°	4852	469
15°	4879	1352
25°	3591	1622
35°	1755	1090
45°	363	326
55°	60	58
65°	14	16
75°	7	8
85°	2	3
90°	0	



TEST NUMBER: P794575

CATALOG NUMBER: LER6D60D010-EC6DR6555659040-6LBDP1B

CANDELA DISTRIBUTION (FULL):

0°	
0°	4867.1
2.5°	4887.8
5°	4852.5
7.5°	4925.8
10°	4966.0
12.5°	4956.3
15°	4878.8
17.5°	4689.3
20°	4369.8
22.5°	3993.5
25°	3591.0
27.5°	3136.6
30°	2626.8
32.5°	2164.8
35°	1755.4
37.5°	1350.8
40°	969.0
42.5°	632.8
45°	363.1
47.5°	192.3
50°	119.7
52.5°	83.0
55°	59.5
57.5°	42.9
60°	29.7
62.5°	19.4
65°	13.8
67.5°	12.4
70°	11.8
72.5°	9.0
75°	6.9
77.5°	6.2
80°	4.8
82.5°	3.5
85°	2.1
87.5°	1.4
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)