

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P794828

Luminaire Tested: LER6D65D010-EC6DR4055659050-6LBS1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P794828
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-28)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D65D010-EC6DR4055659050-6LBS1H
Description: 6 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 40° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9270.2 lumens
Efficiency: N/A
Efficacy: 127.3 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.6
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 72.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P794828
CATALOG NUMBER: LER6D65D010-EC6DR4055659050-6LBS1H

Luminous Intensity Polar Plot

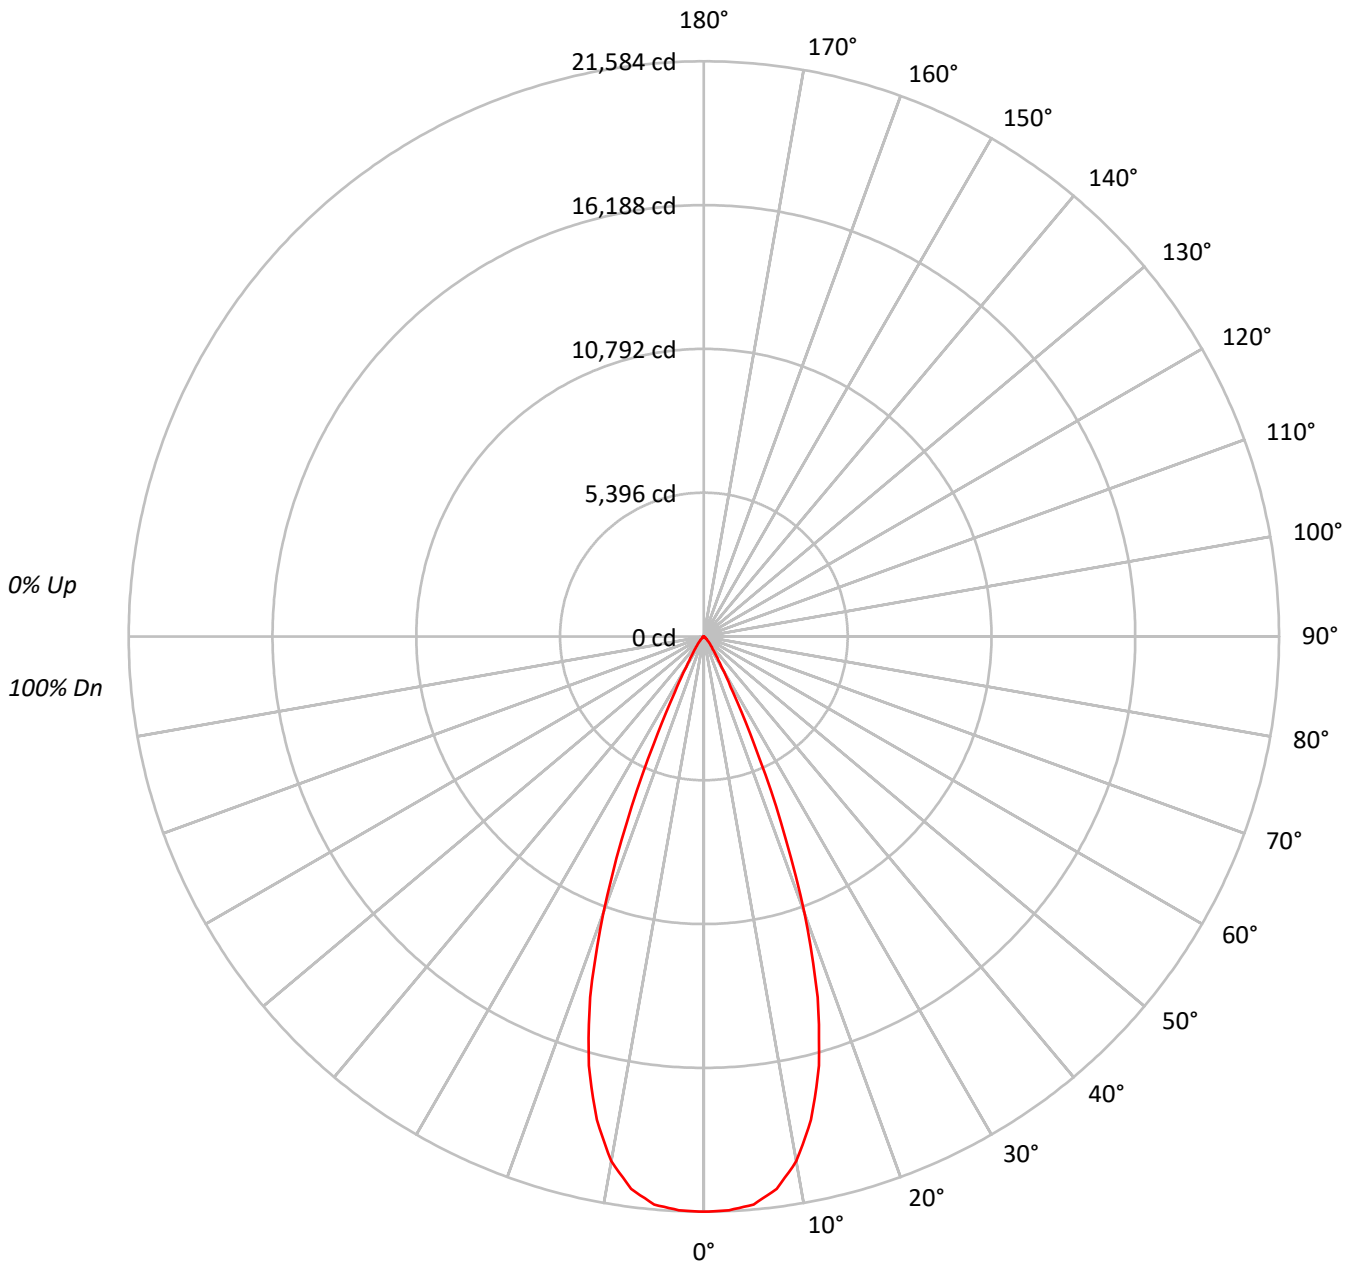



TEST NUMBER: P794828

CATALOG NUMBER: LER6D65D010-EC6DR4055659050-6LBS1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	97	96						96													
2	110	106	103	100	108	105	102	99	102	99	97	99	97	95	96	95	93	92						92													
3	106	101	97	94	104	100	96	93	97	94	92	95	93	90	93	91	89	88						88													
4	102	97	92	89	101	95	91	88	93	90	87	92	89	86	90	87	85	84						84													
5	99	92	88	84	97	91	87	84	90	86	83	88	85	83	87	84	82	81						81													
6	95	88	84	80	94	88	83	80	86	82	80	85	82	79	84	81	79	77						77													
7	92	85	80	77	91	84	80	77	83	79	76	82	79	76	81	78	76	74						74													
8	89	82	77	74	88	81	77	74	80	76	73	79	76	73	78	75	73	72						72													
9	86	79	74	71	85	78	74	71	77	73	71	76	73	70	76	72	70	69						69													
10	83	76	71	68	82	75	71	68	75	71	68	74	70	68	73	70	68	67						67													

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2358229
5°	2346772
10°	2218204
15°	1885764
20°	1285280
25°	536269
30°	168617
35°	78376
40°	43345
45°	19871
50°	9638
55°	5277
60°	2753
65°	982
70°	415
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 19871 cd/sqm



TEST NUMBER: P794828

CATALOG NUMBER: LER6D65D010-EC6DR4055659050-6LBS1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1997.9	21.6
10°-20°	4475.9	48.3
20°-30°	2240.5	24.2
30°-40°	410.7	4.4
40°-50°	113.3	1.2
50°-60°	26.6	0.3
60°-70°	5.1	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	8714.3	94.0
0°-40°	9125.0	98.4
0°-60°	9264.9	99.9
0°-90°	9270.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	9270.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	21584	
5°	21397	###
15°	16671	4476
25°	4448	2240
35°	588	411
45°	129	113
55°	28	27
65°	4	5
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P794828

CATALOG NUMBER: LER6D65D010-EC6DR4055659050-6LBS1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	21583.5
2.5°	21552.0
5°	21396.9
7.5°	20902.6
10°	19993.5
12.5°	18576.3
15°	16671.2
17.5°	14193.6
20°	11054.0
22.5°	7536.2
25°	4448.3
27.5°	2351.5
30°	1336.5
32.5°	863.7
35°	587.6
37.5°	419.9
40°	303.9
42.5°	208.0
45°	128.6
47.5°	82.0
50°	56.7
52.5°	40.3
55°	27.7
57.5°	17.7
60°	12.6
62.5°	7.6
65°	3.8
67.5°	2.5
70°	1.3
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)