

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P794906

Luminaire Tested: LER6D65D010-EC6DR5055659035-6LBDP1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P794906
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D65D010-EC6DR5055659035-6LB DP1MW
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 50° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7895.3 lumens
Efficiency: N/A
Efficacy: 108.5 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 72.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P794906
CATALOG NUMBER: LER6D65D010-EC6DR5055659035-6LBDP1MW

Luminous Intensity Polar Plot

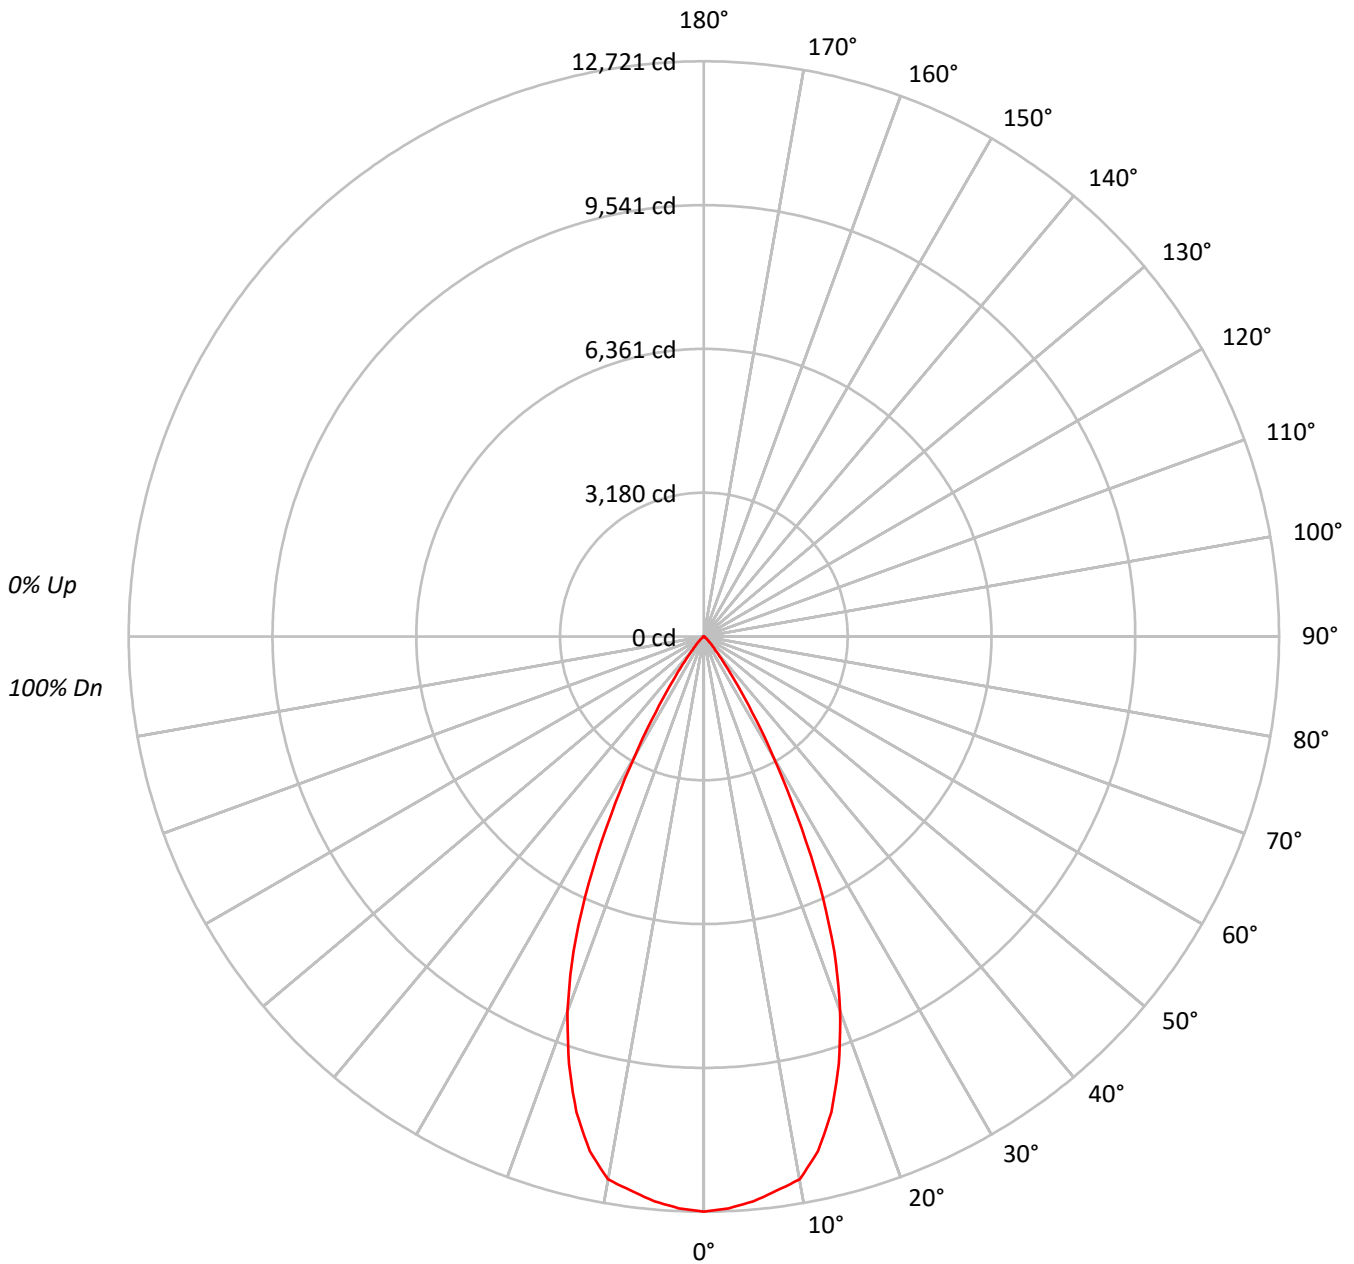



TEST NUMBER: P794906

CATALOG NUMBER: LER6D65D010-EC6DR5055659035-6LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20																	
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0															
RCR																																													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																											
1	114	112	109	107	112	110	108	106	106	104	102	102	101	99	98	97	97	95																											
2	109	105	101	98	107	103	100	97	100	98	95	97	95	93	95	93	91	90																											
3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	91	88	86	85																											
4	100	94	89	85	99	93	88	85	90	87	84	89	85	83	87	84	82	80																											
5	96	89	84	80	95	88	83	79	86	82	79	85	81	78	83	80	77	76																											
6	92	84	79	75	91	83	79	75	82	78	74	81	77	74	79	76	74	72																											
7	88	80	75	71	87	79	74	71	78	74	71	77	73	70	76	73	70	69																											
8	85	76	71	67	84	76	71	67	75	70	67	74	70	67	73	69	66	65																											
9	81	73	68	64	80	72	67	64	71	67	64	71	67	64	70	66	63	62																											
10	78	70	64	61	77	69	64	61	68	64	61	68	64	61	67	63	60	59																											

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1389928
5°	1375353
10°	1352712
15°	1231744
20°	1024957
25°	727567
30°	385101
35°	156938
40°	58279
45°	26685
50°	10947
55°	5715
60°	2819
65°	827
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 26685 cd/sqm



TEST NUMBER: P794906

CATALOG NUMBER: LER6D65D010-EC6DR5055659035-6LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1185.3	15.0
10°-20°	2995.5	37.9
20°-30°	2690.7	34.1
30°-40°	842.5	10.7
40°-50°	147.5	1.9
50°-60°	29.4	0.4
60°-70°	4.4	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6871.4	87.0
0°-40°	7713.9	97.7
0°-60°	7890.8	99.9
0°-90°	7895.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7895.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	12721	
5°	12540	###
15°	10889	2995
25°	6035	2691
35°	1177	842
45°	173	148
55°	30	29
65°	3	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P794906
CATALOG NUMBER: LER6D65D010-EC6DR5055659035-6LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	12721.2
2.5°	12657.9
5°	12539.9
7.5°	12359.8
10°	12192.5
12.5°	11656.2
15°	10889.3
17.5°	9915.5
20°	8815.1
22.5°	7542.0
25°	6035.1
27.5°	4437.0
30°	3052.4
32.5°	1987.4
35°	1176.6
37.5°	675.7
40°	408.6
42.5°	266.0
45°	172.7
47.5°	105.1
50°	64.4
52.5°	44.0
55°	30.0
57.5°	20.4
60°	12.9
62.5°	7.5
65°	3.2
67.5°	1.1
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)