

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P795037

Luminaire Tested: LER6D65D010-EC6DR6555659027-6LBS1LI

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P795037  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D65D010-EC6DR6555659027-6LBS1LI  
Description: 6 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7444.2 lumens  
Efficiency: N/A  
Efficacy: 102.3 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96  
Luminous Opening: Circular (Dia: 0.48' x H: 0')  
CIE Type: Direct

Input Watts (W): 72.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P795037

CATALOG NUMBER: LER6D65D010-EC6DR6555659027-6LBS1LI

### Luminous Intensity Polar Plot

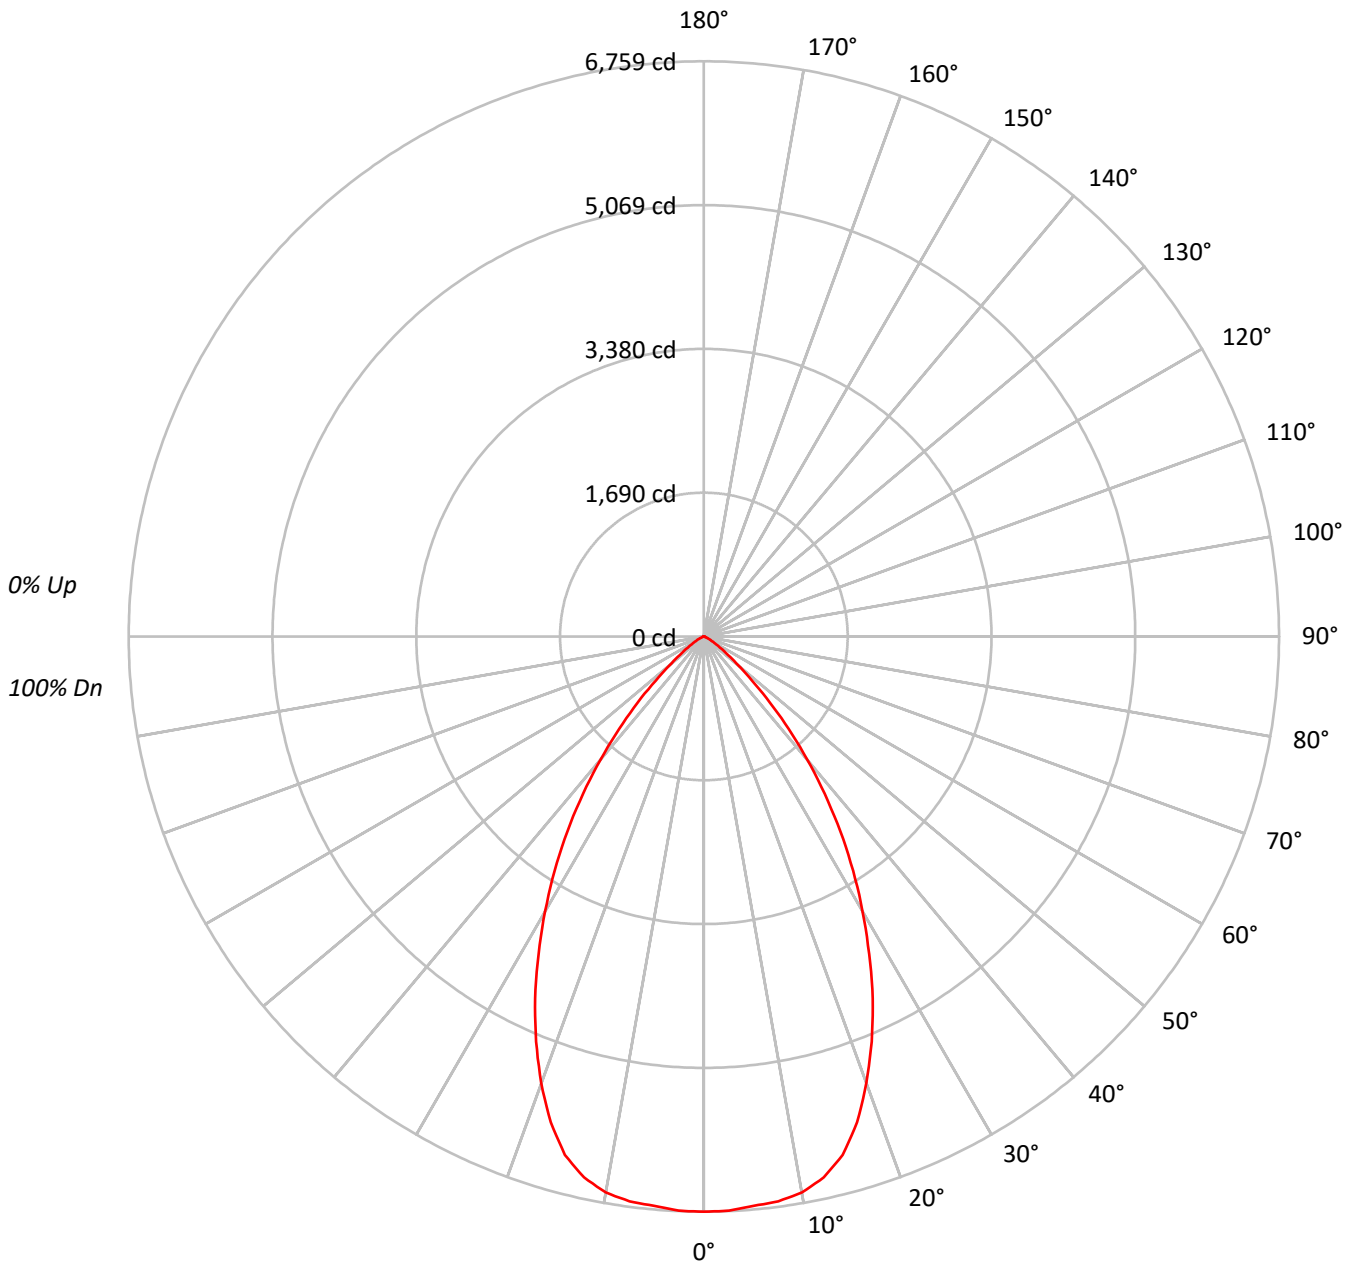



TEST NUMBER: P795037

CATALOG NUMBER: LER6D65D010-EC6DR6555659027-6LBS1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93																			
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85																			
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78																			
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72																			
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66																			
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61																			
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56																			
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52																			
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49																			
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	394758
5°	393762
10°	393428
15°	381299
20°	347126
25°	302495
30°	251595
35°	199349
40°	143882
45°	90896
50°	47384
55°	25181
60°	13223
65°	7269
70°	3057
75°	3362
80°	2354
85°	2010

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 90896 cd/sqm



TEST NUMBER: P795037

CATALOG NUMBER: LER6D65D010-EC6DR6555659027-6LBS1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	639.2	8.6
10°-20°	1750.4	23.5
20°-30°	2139.5	28.7
30°-40°	1736.0	23.3
40°-50°	865.1	11.6
50°-60°	241.3	3.2
60°-70°	54.8	0.7
70°-80°	14.3	0.2
80°-90°	3.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4529.1	60.8
0°-40°	6265.1	84.2
0°-60°	7371.4	99.0
0°-90°	7444.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7444.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	6759	
5°	6716	639
15°	6306	1750
25°	4694	2140
35°	2796	1736
45°	1100	865
55°	247	241
65°	53	55
75°	15	14
85°	3	4
90°	0	



TEST NUMBER: P795037

CATALOG NUMBER: LER6D65D010-EC6DR6555659027-6LBS1LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	6759.1
2.5°	6754.1
5°	6716.4
7.5°	6694.5
10°	6634.0
12.5°	6510.8
15°	6306.2
17.5°	5986.4
20°	5585.1
22.5°	5152.0
25°	4694.1
27.5°	4204.5
30°	3730.7
32.5°	3262.8
35°	2796.0
37.5°	2330.2
40°	1887.2
42.5°	1472.0
45°	1100.5
47.5°	766.8
50°	521.5
52.5°	359.6
55°	247.3
57.5°	166.9
60°	113.2
62.5°	78.5
65°	52.6
67.5°	26.8
70°	17.9
72.5°	16.9
75°	14.9
77.5°	9.9
80°	7.0
82.5°	5.0
85°	3.0
87.5°	2.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)