

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P795082

Luminaire Tested: LER6D65D010-EC6DR7055659027-6LBDP1MW

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P795082  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D65D010-EC6DR7055659027-6LBDDP1MW  
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6060.3 lumens  
Efficiency: N/A  
Efficacy: 83.2 lumens/watt  
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 72.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P795082  
CATALOG NUMBER: LER6D65D010-EC6DR7055659027-6LBDP1MW

### Luminous Intensity Polar Plot

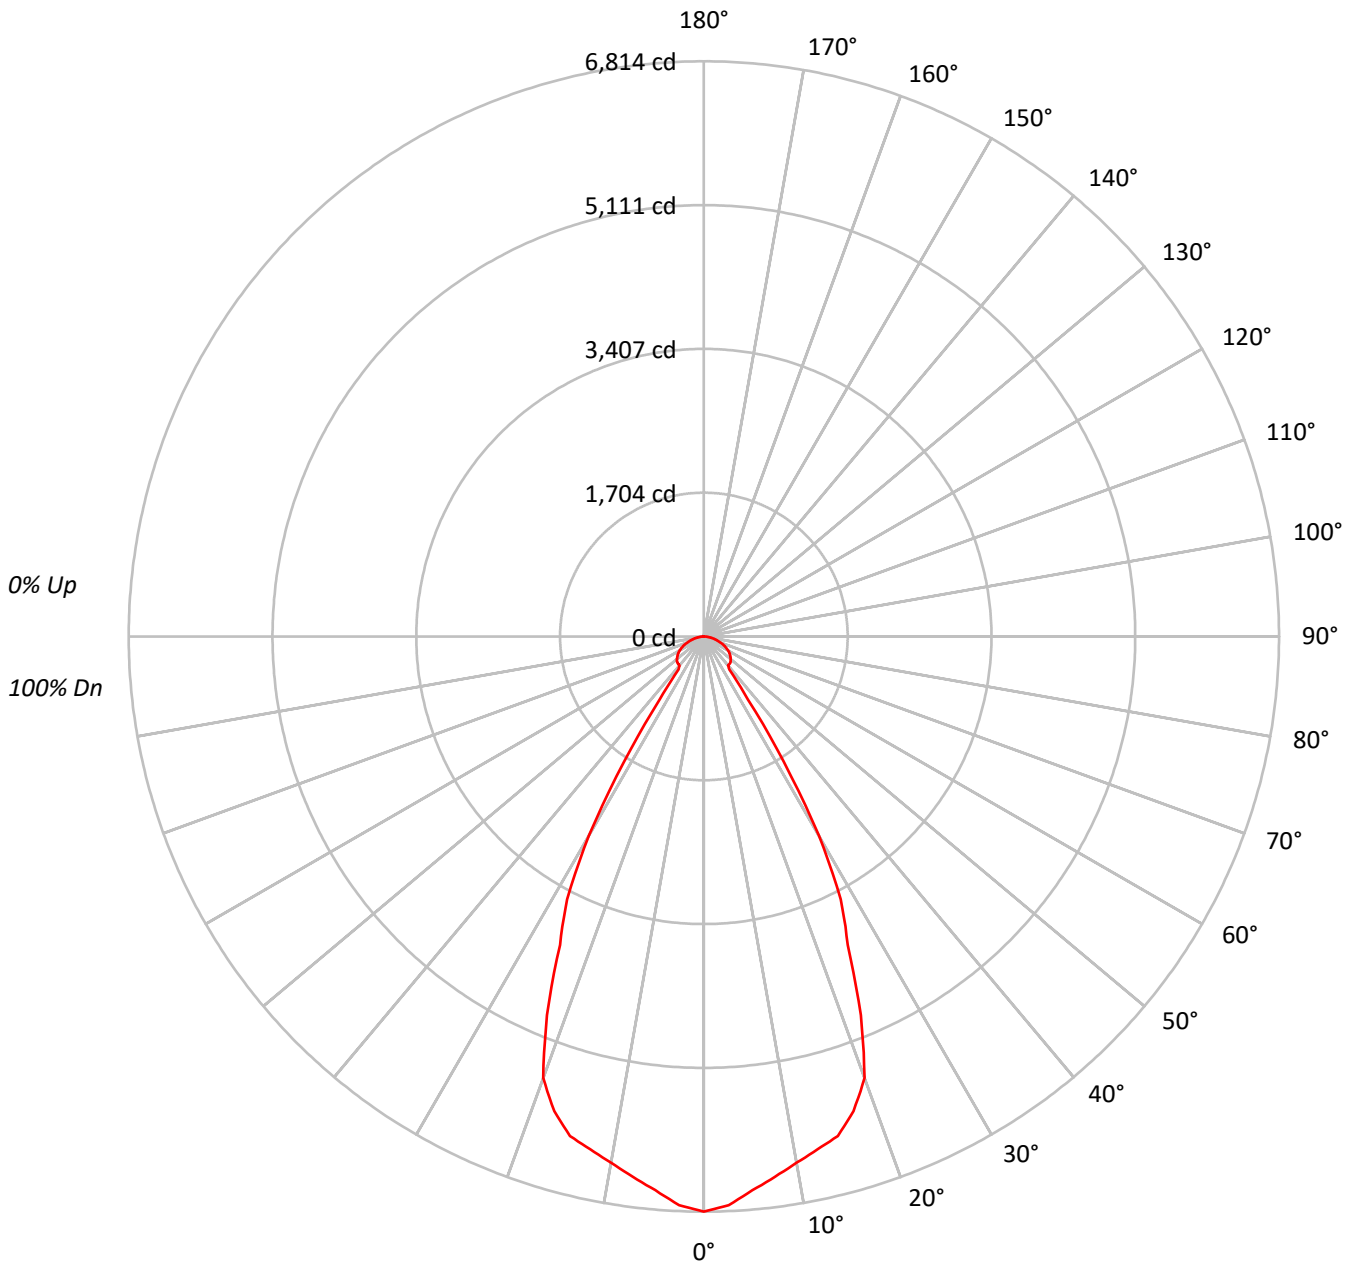



TEST NUMBER: P795082

CATALOG NUMBER: LER6D65D010-EC6DR7055659027-6LBDP1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10		0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70			
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	744448
5°	722329
10°	702201
15°	692988
20°	647105
25°	486142
30°	343657
35°	121725
40°	64012
45°	68173
50°	70593
55°	71929
60°	72374
65°	70838
70°	66862
75°	61930
80°	54993
85°	44629

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 57.5°  
 Luminance: 72393 cd/sqm



TEST NUMBER: P795082

CATALOG NUMBER: LER6D65D010-EC6DR7055659027-6LBDP1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	621.2	10.3
10°-20°	1703.9	28.1
20°-30°	1876.6	31.0
30°-40°	717.0	11.8
40°-50°	338.5	5.6
50°-60°	336.6	5.6
60°-70°	269.5	4.4
70°-80°	154.9	2.6
80°-90°	42.1	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4201.7	69.3
0°-40°	4918.7	81.2
0°-60°	5593.9	92.3
0°-90°	6060.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6060.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	6814	
5°	6586	621
15°	6126	1704
25°	4032	1877
35°	913	717
45°	441	339
55°	378	337
65°	274	269
75°	147	155
85°	36	42
90°	0	



TEST NUMBER: P795082

CATALOG NUMBER: LER6D65D010-EC6DR7055659027-6LBDP1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	6813.5
2.5°	6742.3
5°	6585.9
7.5°	6455.4
10°	6329.2
12.5°	6222.4
15°	6126.4
17.5°	5894.4
20°	5565.4
22.5°	4855.6
25°	4032.5
27.5°	3510.3
30°	2723.9
32.5°	1759.5
35°	912.6
37.5°	493.0
40°	448.8
42.5°	445.5
45°	441.2
47.5°	431.5
50°	415.3
52.5°	397.0
55°	377.6
57.5°	356.0
60°	331.2
62.5°	303.1
65°	274.0
67.5°	241.6
70°	209.3
72.5°	176.9
75°	146.7
77.5°	115.4
80°	87.4
82.5°	61.5
85°	35.6
87.5°	14.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)