

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P795112

Luminaire Tested: LER6D65D010-EC6DR7055659050-6LBDP1H

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P795112  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D65D010-EC6DR7055659050-6LB DP1H  
Description: 6 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8515.4 lumens  
Efficiency: N/A  
Efficacy: 117.0 lumens/watt  
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 72.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P795112  
CATALOG NUMBER: LER6D65D010-EC6DR7055659050-6LBDP1H

### Luminous Intensity Polar Plot

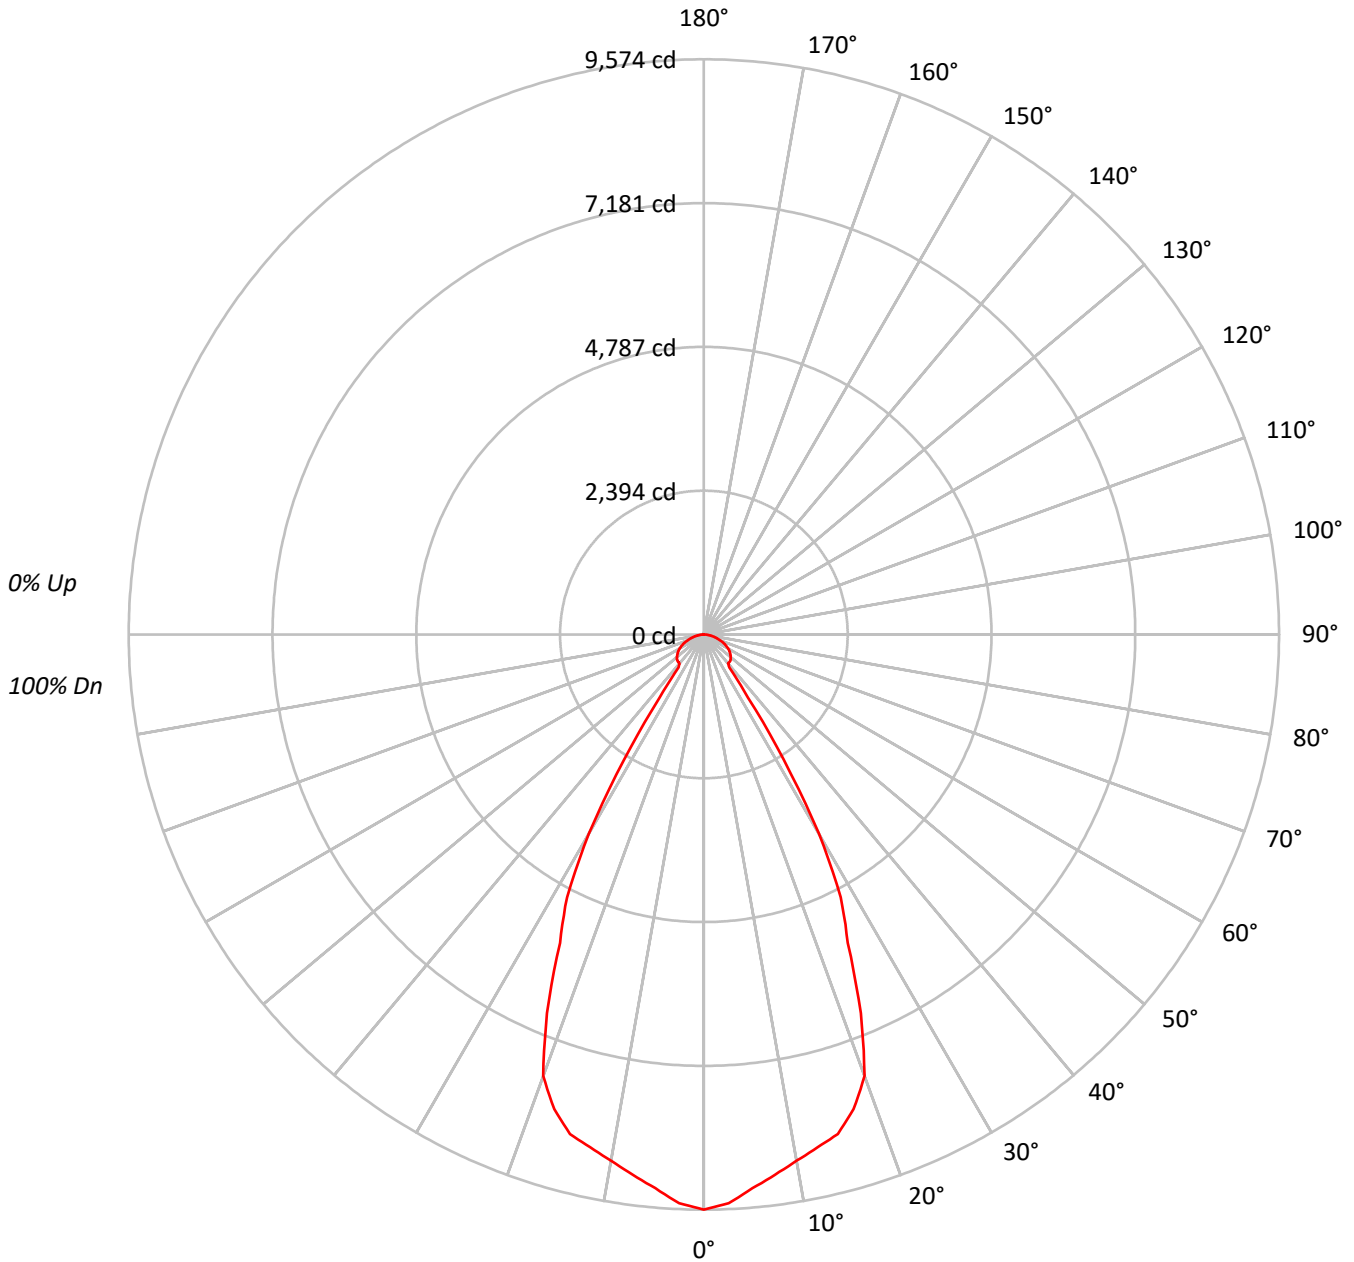



TEST NUMBER: P795112  
 CATALOG NUMBER: LER6D65D010-EC6DR7055659050-6LBDP1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91			91
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83			83
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76			76
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70			70
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65			65
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61			61
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57			57
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53			53
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50			50
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48			48

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1046041
5°	1014961
10°	986667
15°	973728
20°	909254
25°	683082
30°	482878
35°	171050
40°	89942
45°	95801
50°	99200
55°	101055
60°	101700
65°	99535
70°	93952
75°	87005
80°	77267
85°	62681

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 57.5°  
 Luminance: 101716 cd/sqm



TEST NUMBER: P795112

CATALOG NUMBER: LER6D65D010-EC6DR7055659050-6LBDP1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	872.8	10.3
10°-20°	2394.2	28.1
20°-30°	2636.9	31.0
30°-40°	1007.5	11.8
40°-50°	475.7	5.6
50°-60°	472.9	5.6
60°-70°	378.6	4.4
70°-80°	217.6	2.6
80°-90°	59.2	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5903.9	69.3
0°-40°	6911.4	81.2
0°-60°	7860.0	92.3
0°-90°	8515.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8515.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	9574	
5°	9254	873
15°	8608	2394
25°	5666	2637
35°	1282	1007
45°	620	476
55°	530	473
65°	385	379
75°	206	218
85°	50	59
90°	0	



TEST NUMBER: P795112

CATALOG NUMBER: LER6D65D010-EC6DR7055659050-6LBDP1H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	9573.8
2.5°	9473.8
5°	9254.0
7.5°	9070.6
10°	8893.2
12.5°	8743.2
15°	8608.3
17.5°	8282.4
20°	7820.0
22.5°	6822.6
25°	5666.1
27.5°	4932.4
30°	3827.4
32.5°	2472.3
35°	1282.4
37.5°	692.7
40°	630.6
42.5°	626.0
45°	620.0
47.5°	606.3
50°	583.6
52.5°	557.8
55°	530.5
57.5°	500.2
60°	465.4
62.5°	425.9
65°	385.0
67.5°	339.5
70°	294.1
72.5°	248.6
75°	206.1
77.5°	162.2
80°	122.8
82.5°	86.4
85°	50.0
87.5°	19.7
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)