

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P175516

Luminaire Tested: **LDA6A10930D010TE LAR35FL 6LFC1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P175516
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P26295)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA6A10930D010TE LAR35FL 6LFC1
Description: PORTFOLIO 6" Flat Cone, Self-flange Trim Ring, 35° Flood Optic, at 0° tilt
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 760.1 lumens
Efficiency: N/A
Efficacy: 54.9 lumens/watt
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.56
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 13.84
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P175516

CATALOG NUMBER: LDA6A10930D010TE LAR35FL 6LFC1

Luminous Intensity Polar Plot

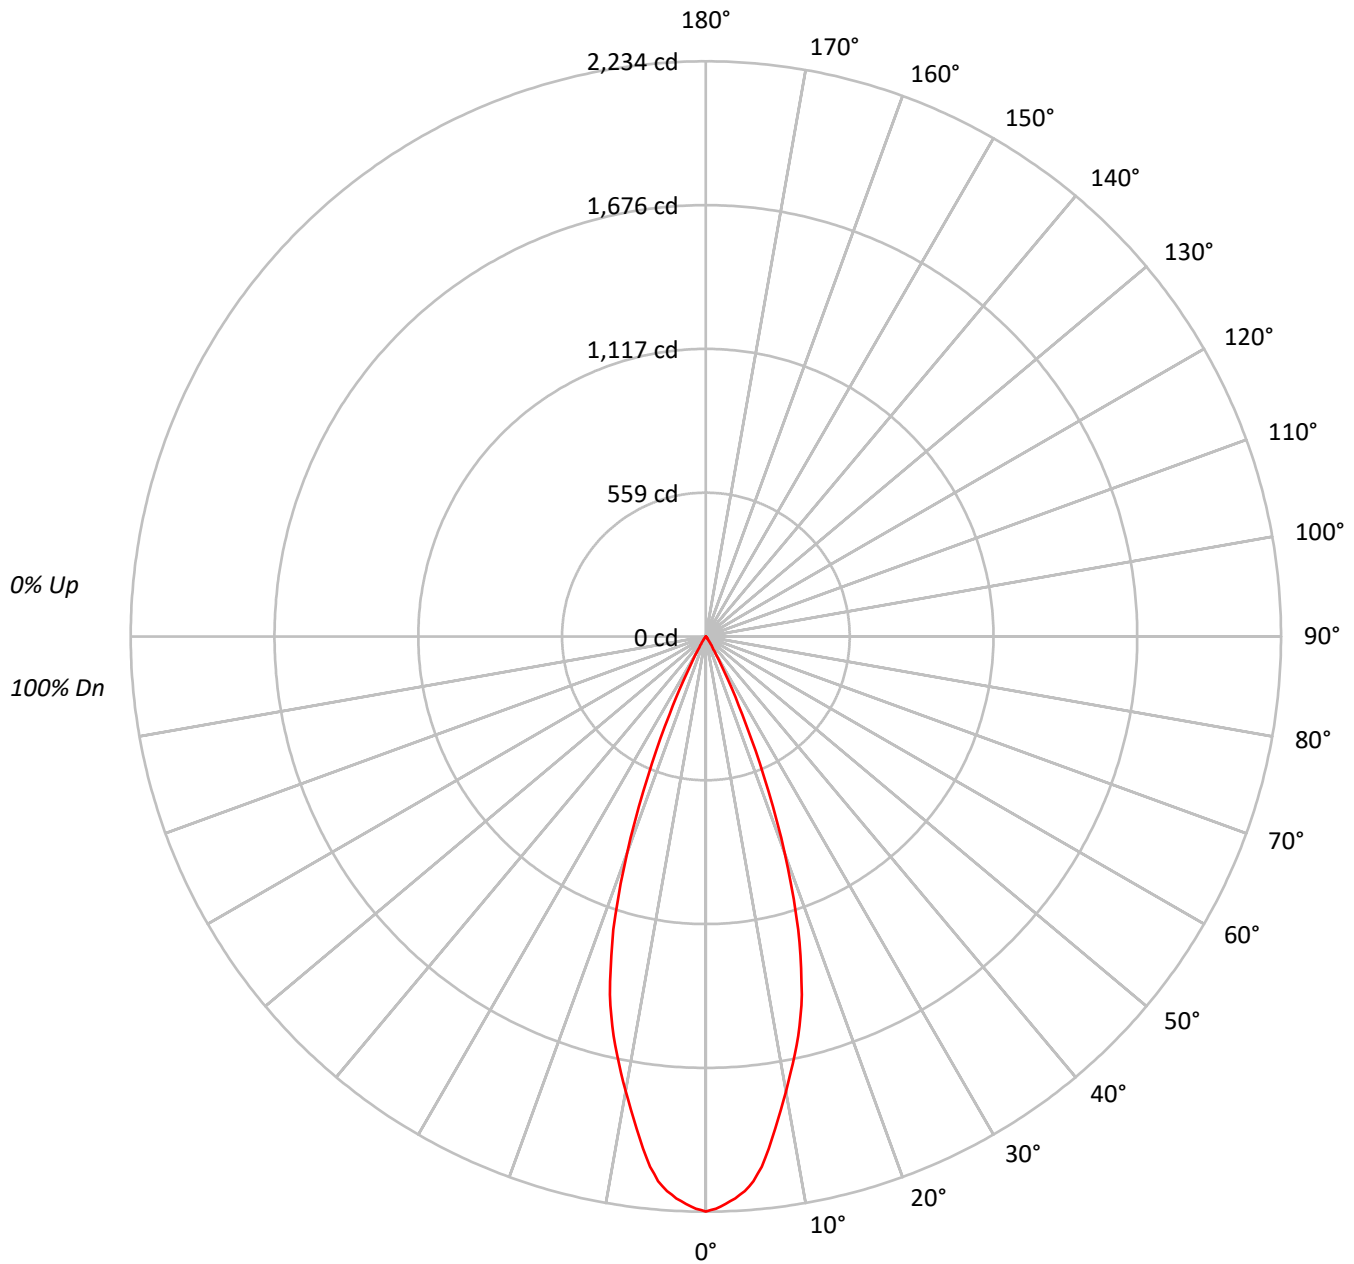



TEST NUMBER: P175516

CATALOG NUMBER: LDA6A10930D010TE LAR35FL 6LFC1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	109	112	111	109	107	107	105	104		103	102	101		100
2	111	107	104	101	109	105	103	100	102	100	98		99	98	96		97
3	107	102	99	96	105	101	98	95	98	96	93		96	94	92		94
4	104	98	94	91	102	97	93	90	95	92	89		93	90	88		91
5	100	94	90	87	99	93	89	86	92	88	85		90	87	85		89
6	97	90	86	83	96	90	86	83	88	85	82		87	84	82		86
7	94	87	83	80	93	87	82	79	85	82	79		84	81	79		83
8	91	84	80	77	90	84	79	77	83	79	76		82	78	76		81
9	88	81	77	74	87	81	77	74	80	76	74		79	76	73		79
10	86	79	74	72	85	78	74	71	78	74	71		77	74	71		76

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	122446
5°	116850
10°	99826
15°	81731
20°	52312
25°	20154
30°	4134
35°	1098
40°	344
45°	109
50°	51
55°	29
60°	33
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P175516

CATALOG NUMBER: LDA6A10930D010TE LAR35FL 6LFC1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	191.2	25.2
10°-20°	384.4	50.6
20°-30°	168.5	22.2
30°-40°	14.1	1.9
40°-50°	1.4	0.2
50°-60°	0.3	0.0
60°-70°	0.1	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	744.2	97.9
0°-40°	758.3	99.8
0°-60°	759.9	100.0
0°-90°	760.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	760.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2234	
5°	2123	191
15°	1440	384
25°	333	168
35°	16	14
45°	1	1
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P175516

CATALOG NUMBER: LDA6A10930D010TE LAR35FL 6LFC1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2233.6
1°	2222.9
2°	2205.4
3°	2185.3
4°	2159.9
5°	2123.4
6°	2071.4
7°	2004.1
8°	1930.4
9°	1860.3
10°	1793.3
11°	1726.1
12°	1660.5
13°	1592.4
14°	1520.1
15°	1440.1
17.5°	1194.2
20°	896.7
22.5°	585.5
25°	333.2
27.5°	155.1
30°	65.3
32.5°	33.9
35°	16.4
37.5°	8.8
40°	4.8
42.5°	2.5
45°	1.4
47.5°	0.8
50°	0.6
52.5°	0.3
55°	0.3
57.5°	0.3
60°	0.3
62.5°	0.3
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P175516

CATALOG NUMBER: LDA6A10930D010TE LAR35FL 6LFC1

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°	0.0
87.5°	0.0



(END OF REPORT)