

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P175391

Luminaire Tested: **LDA6A15827D010TE LARL15SP 6LFC1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P175391
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P26262)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA6A15827D010TE LARL15SP 6LFC1
Description: PORTFOLIO 6" Flat Cone, Self-flange Trim Ring, 15° Spot Optic, at 0° tilt
Light Source: (1) HIGH LUMEN LED 80CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1069.9 lumens
Efficiency: N/A
Efficacy: 48.0 lumens/watt
Spacing Criteria (0/90/45): 0.21 / 0.21 / 0.26
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 22.27
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P175391

CATALOG NUMBER: LDA6A15827D010TE LARL15SP 6LFC1

Luminous Intensity Polar Plot

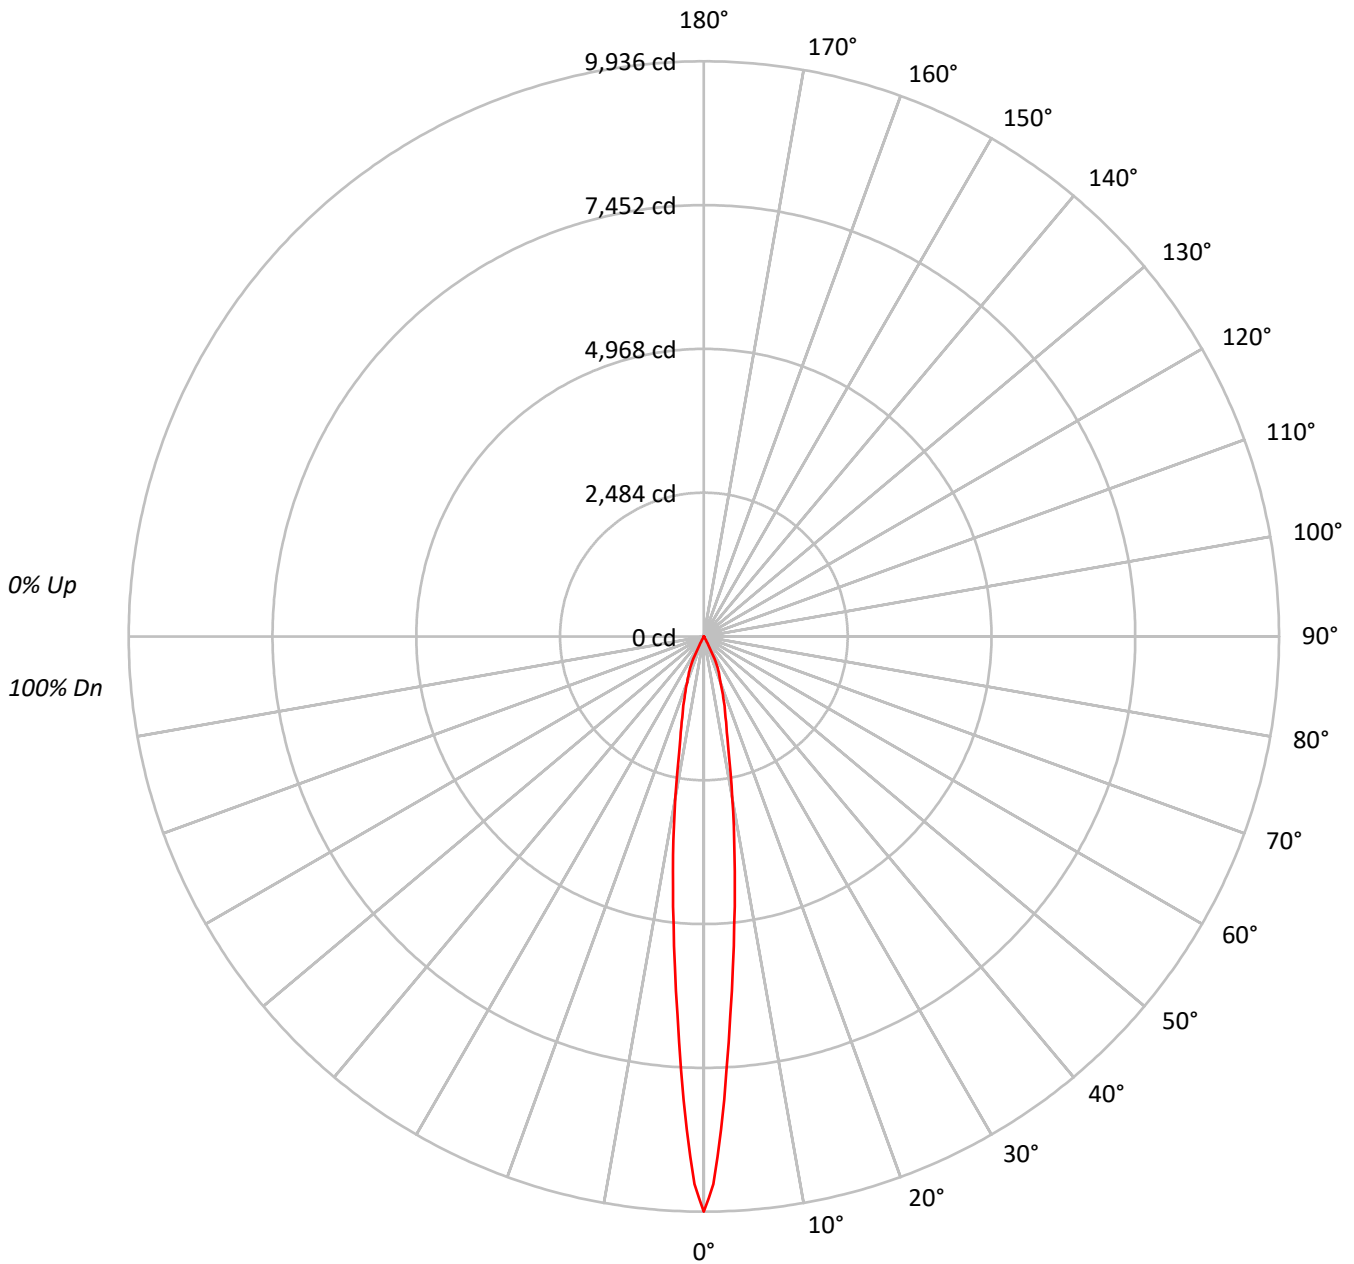



TEST NUMBER: P175391

CATALOG NUMBER: LDA6A15827D010TE LARL15SP 6LFC1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	115	113	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99	97			97																
2	112	108	106	103	110	107	104	102	104	102	100	101	99	98	98	97	96	95			95																
3	109	104	101	98	107	103	100	98	101	98	96	98	96	95	96	95	93	92			92																
4	106	101	97	94	104	100	96	94	98	95	93	96	94	92	94	92	91	90			90																
5	103	97	94	91	102	97	93	90	95	92	90	94	91	89	92	90	88	87			87																
6	100	95	91	88	99	94	90	88	93	89	87	91	89	87	90	88	86	85			85																
7	98	92	88	85	97	91	88	85	90	87	85	89	86	84	88	86	84	83			83																
8	95	89	86	83	95	89	85	83	88	85	83	87	84	82	86	84	82	81			81																
9	93	87	83	81	92	87	83	81	86	83	81	85	82	80	85	82	80	79			79																
10	91	85	81	79	90	85	81	79	84	81	79	83	81	79	83	80	78	78			78																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	544693
5°	315369
10°	157668
15°	82254
20°	48905
25°	29832
30°	601
35°	154
40°	100
45°	70
50°	43
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P175391

CATALOG NUMBER: LDA6A15827D010TE LARL15SP 6LFC1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	459.8	43.0
10°-20°	417.2	39.0
20°-30°	190.2	17.8
30°-40°	2.0	0.2
40°-50°	0.6	0.1
50°-60°	0.1	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1067.2	99.8
0°-40°	1069.2	99.9
0°-60°	1069.9	100.0
0°-90°	1069.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1069.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	9936	
5°	5731	460
15°	1449	417
25°	493	190
35°	2	2
45°	1	1
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P175391

CATALOG NUMBER: LDA6A15827D010TE LARL15SP 6LFC1

CANDELA DISTRIBUTION (FULL):

	0°
0°	9936.0
1°	9461.4
2°	8526.2
3°	7497.6
4°	6553.4
5°	5730.9
6°	5013.5
7°	4377.7
8°	3808.8
9°	3304.8
10°	2832.4
11°	2413.5
12°	2061.1
13°	1800.7
14°	1607.3
15°	1449.3
17.5°	1115.9
20°	838.3
22.5°	667.6
25°	493.2
27.5°	163.9
30°	9.5
32.5°	3.6
35°	2.3
37.5°	1.8
40°	1.4
42.5°	0.9
45°	0.9
47.5°	0.5
50°	0.5
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P175391

CATALOG NUMBER: LDA6A15827D010TE LARL15SP 6LFC1

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)