

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P179584

Luminaire Tested: **LDA6A45927D010TE LARH30NF 6LAL1LI**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P179584  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P26663)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LDA6A45927D010TE LARH30NF 6LAL1LI  
Description: PORTFOLIO 6" Lensed Adjustable, Self-flanged, 30° Narrow Flood  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3332.4 lumens  
Efficiency: N/A  
Efficacy: 62.9 lumens/watt  
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.52  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct


Input Watts (W): 53  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P179584

CATALOG NUMBER: LDA6A45927D010TE LARH30NF 6LAL1LI

### Luminous Intensity Polar Plot

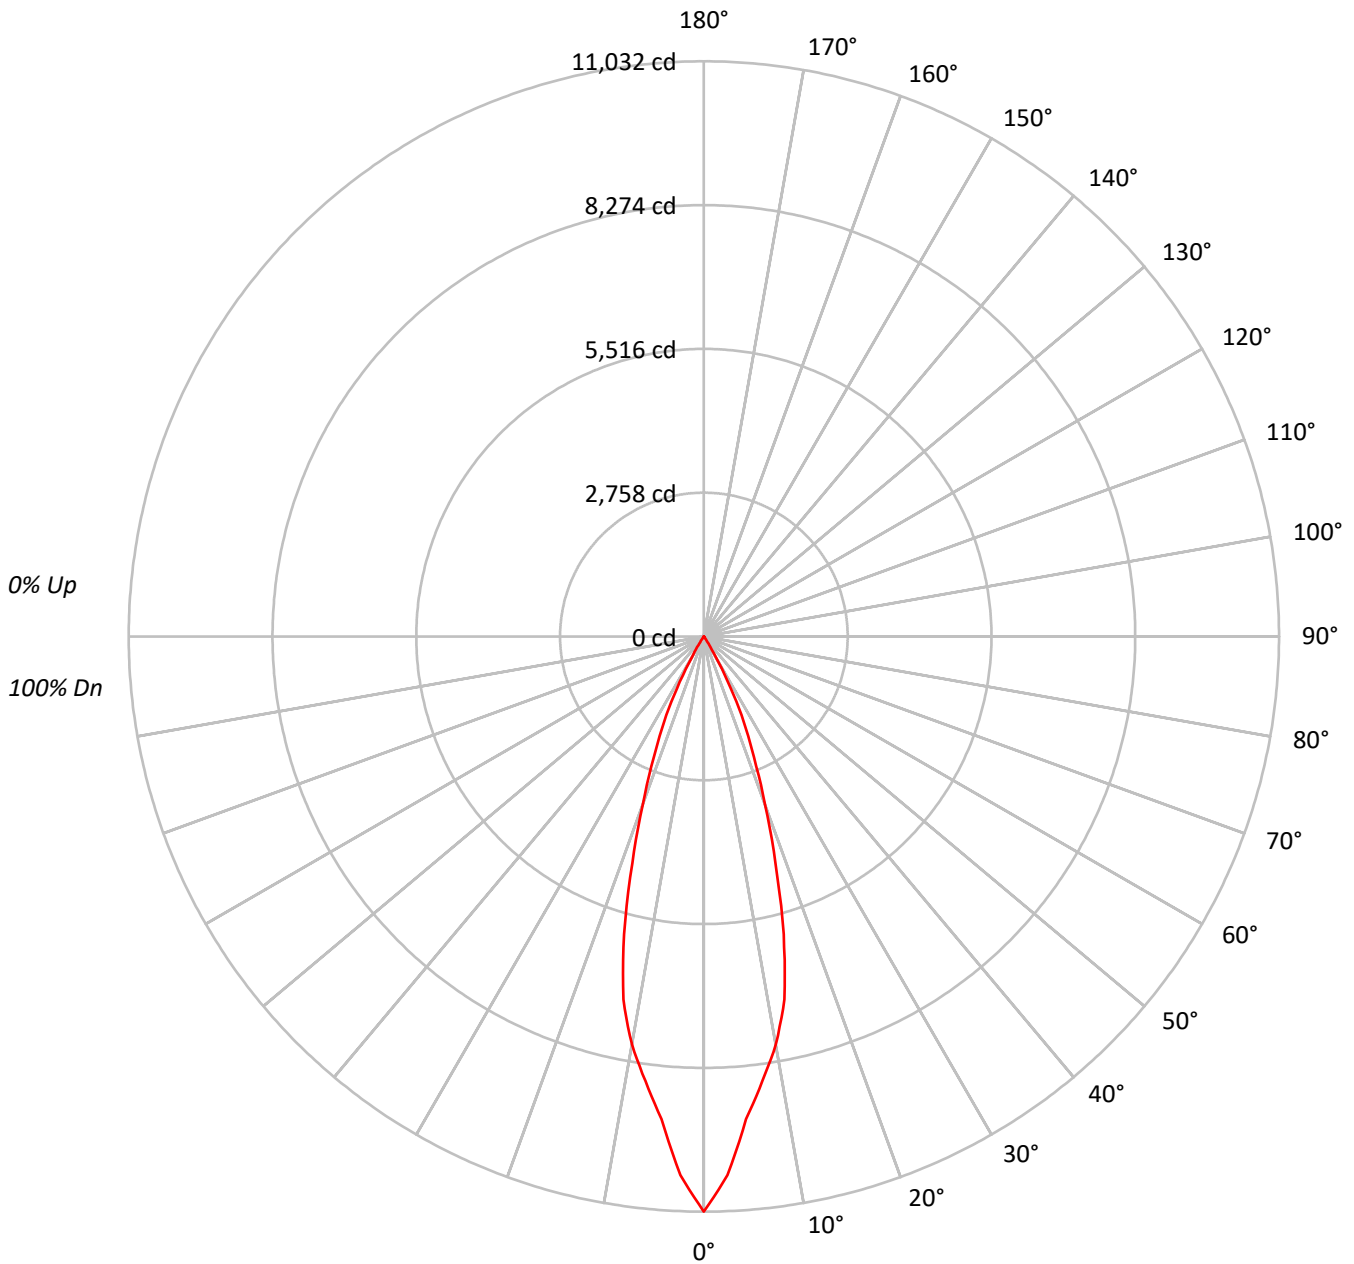



TEST NUMBER: P179584

CATALOG NUMBER: LDA6A45927D010TE LARH30NF 6LAL1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92			
3	107	102	98	95	105	101	97	94	98	95	93	96	94	92	94	92	90	89			
4	103	98	93	90	102	97	93	90	95	91	89	93	90	88	91	89	87	86			
5	100	94	89	86	99	93	89	86	91	88	85	90	87	84	88	86	84	82			
6	97	90	86	82	95	89	85	82	88	84	82	87	84	81	86	83	81	79			
7	94	87	82	79	92	86	82	79	85	81	79	84	81	78	83	80	78	77			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72			
10	85	78	74	71	84	78	74	71	77	73	71	76	73	70	76	73	70	69			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	604765
5°	511362
10°	442365
15°	335422
20°	199564
25°	109476
30°	28220
35°	2523
40°	1045
45°	597
50°	324
55°	516
60°	504
65°	402
70°	369
75°	318
80°	253
85°	0



TEST NUMBER: P179584

CATALOG NUMBER: LDA6A45927D010TE LARH30NF 6LAL1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	851.9	25.6
10°-20°	1581.5	47.5
20°-30°	812.7	24.4
30°-40°	70.9	2.1
40°-50°	6.3	0.2
50°-60°	4.2	0.1
60°-70°	3.1	0.1
70°-80°	1.6	0.0
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3246.0	97.4
0°-40°	3316.9	99.5
0°-60°	3327.4	99.8
0°-90°	3332.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3332.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	11032	
5°	9292	852
15°	5910	1581
25°	1810	813
35°	38	71
45°	8	6
55°	5	4
65°	3	3
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P179584

CATALOG NUMBER: LDA6A45927D010TE LARH30NF 6LAL1LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	11031.8
2.5°	10340.1
5°	9292.5
7.5°	8598.5
10°	7946.8
12.5°	7133.7
15°	5910.1
17.5°	4560.6
20°	3420.8
22.5°	2505.5
25°	1809.9
27.5°	1113.6
30°	445.8
32.5°	192.9
35°	37.7
37.5°	21.5
40°	14.6
42.5°	10.8
45°	7.7
47.5°	5.4
50°	3.8
52.5°	4.6
55°	5.4
57.5°	4.6
60°	4.6
62.5°	3.8
65°	3.1
67.5°	2.3
70°	2.3
72.5°	1.5
75°	1.5
77.5°	1.5
80°	0.8
82.5°	0.8
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)