

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P179613

Luminaire Tested: **LDA6A45830D010TE LARH40FL 6LFC1H**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P179613
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P26667)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA6A45830D010TE LARH40FL 6LFC1H
Description: PORTFOLIO 6" Flat Cone, Self-flanged, 40° Flood
Light Source: (1) HIGH LUMEN LED 80CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4904.4 lumens
Efficiency: N/A
Efficacy: 92.5 lumens/watt
Spacing Criteria (0/90/45): 0.67 / 0.67 / 0.61
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 53
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P179613

CATALOG NUMBER: LDA6A45830D010TE LARH40FL 6LFC1H

Luminous Intensity Polar Plot

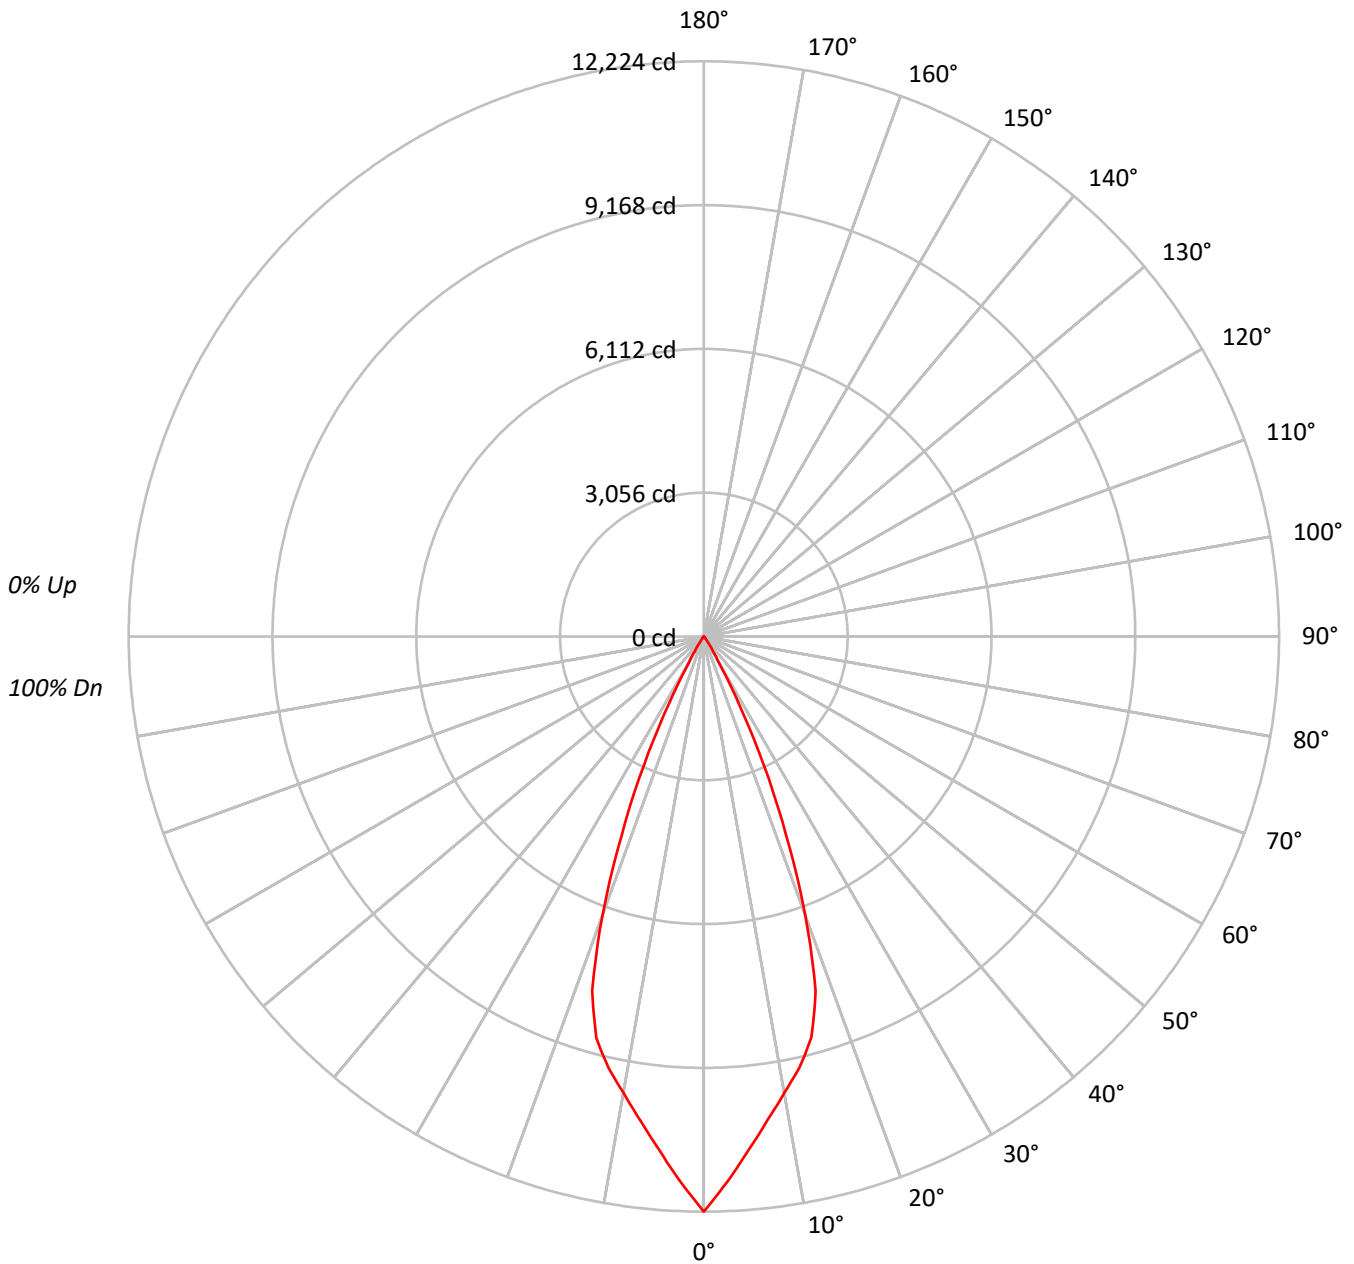



TEST NUMBER: P179613

CATALOG NUMBER: LDA6A45830D010TE LARH40FL 6LFC1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96	96	96	96
2	110	107	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92	92	92	92
3	106	101	97	94	105	100	96	94	98	95	92	95	93	91	93	91	89	88	88	88	88
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84	84	84	84
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81	81	81	81
6	96	89	84	81	94	88	84	81	87	83	80	85	82	79	84	81	79	78	78	78	78
7	92	85	81	77	91	85	80	77	83	80	77	82	79	76	81	78	76	75	75	75	75
8	89	82	77	74	88	81	77	74	80	76	74	80	76	73	79	75	73	72	72	72	72
9	86	79	74	71	85	78	74	71	78	74	71	77	73	71	76	73	70	69	69	69	69
10	84	76	71	68	83	76	71	68	75	71	68	74	71	68	74	70	68	67	67	67	67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	670133
5°	602420
10°	548008
15°	500928
20°	367579
25°	181698
30°	39455
35°	7475
40°	2032
45°	915
50°	503
55°	468
60°	318
65°	376
70°	321
75°	212
80°	316
85°	0



TEST NUMBER: P179613

CATALOG NUMBER: LDA6A45830D010TE LARH40FL 6LFC1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1012.7	20.6
10°-20°	2374.3	48.4
20°-30°	1379.3	28.1
30°-40°	119.6	2.4
40°-50°	10.3	0.2
50°-60°	4.0	0.1
60°-70°	2.5	0.1
70°-80°	1.2	0.0
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4766.3	97.2
0°-40°	4885.9	99.6
0°-60°	4900.2	99.9
0°-90°	4904.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4904.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	12224	
5°	10947	###
15°	8826	2374
25°	3004	1379
35°	112	120
45°	12	10
55°	5	4
65°	3	3
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P179613

CATALOG NUMBER: LDA6A45830D010TE LARH40FL 6LFC1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	12224.2
2.5°	11585.2
5°	10947.2
7.5°	10368.0
10°	9844.6
12.5°	9385.0
15°	8826.3
17.5°	7894.3
20°	6300.8
22.5°	4564.1
25°	3003.9
27.5°	1569.1
30°	623.3
32.5°	323.4
35°	111.7
37.5°	46.1
40°	28.4
42.5°	17.6
45°	11.8
47.5°	7.8
50°	5.9
52.5°	4.9
55°	4.9
57.5°	3.9
60°	2.9
62.5°	2.9
65°	2.9
67.5°	2.0
70°	2.0
72.5°	1.0
75°	1.0
77.5°	1.0
80°	1.0
82.5°	1.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)