

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P179617

Luminaire Tested: **LDA6A45930D010TE LARH40FL 6LFC1H**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P179617
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P26667)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA6A45930D010TE LARH40FL 6LFC1H
Description: PORTFOLIO 6" Flat Cone, Self-flanged, 40° Flood
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4072.4 lumens
Efficiency: N/A
Efficacy: 76.8 lumens/watt
Spacing Criteria (0/90/45): 0.67 / 0.67 / 0.61
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 53
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P179617

CATALOG NUMBER: LDA6A45930D010TE LARH40FL 6LFC1H

Luminous Intensity Polar Plot

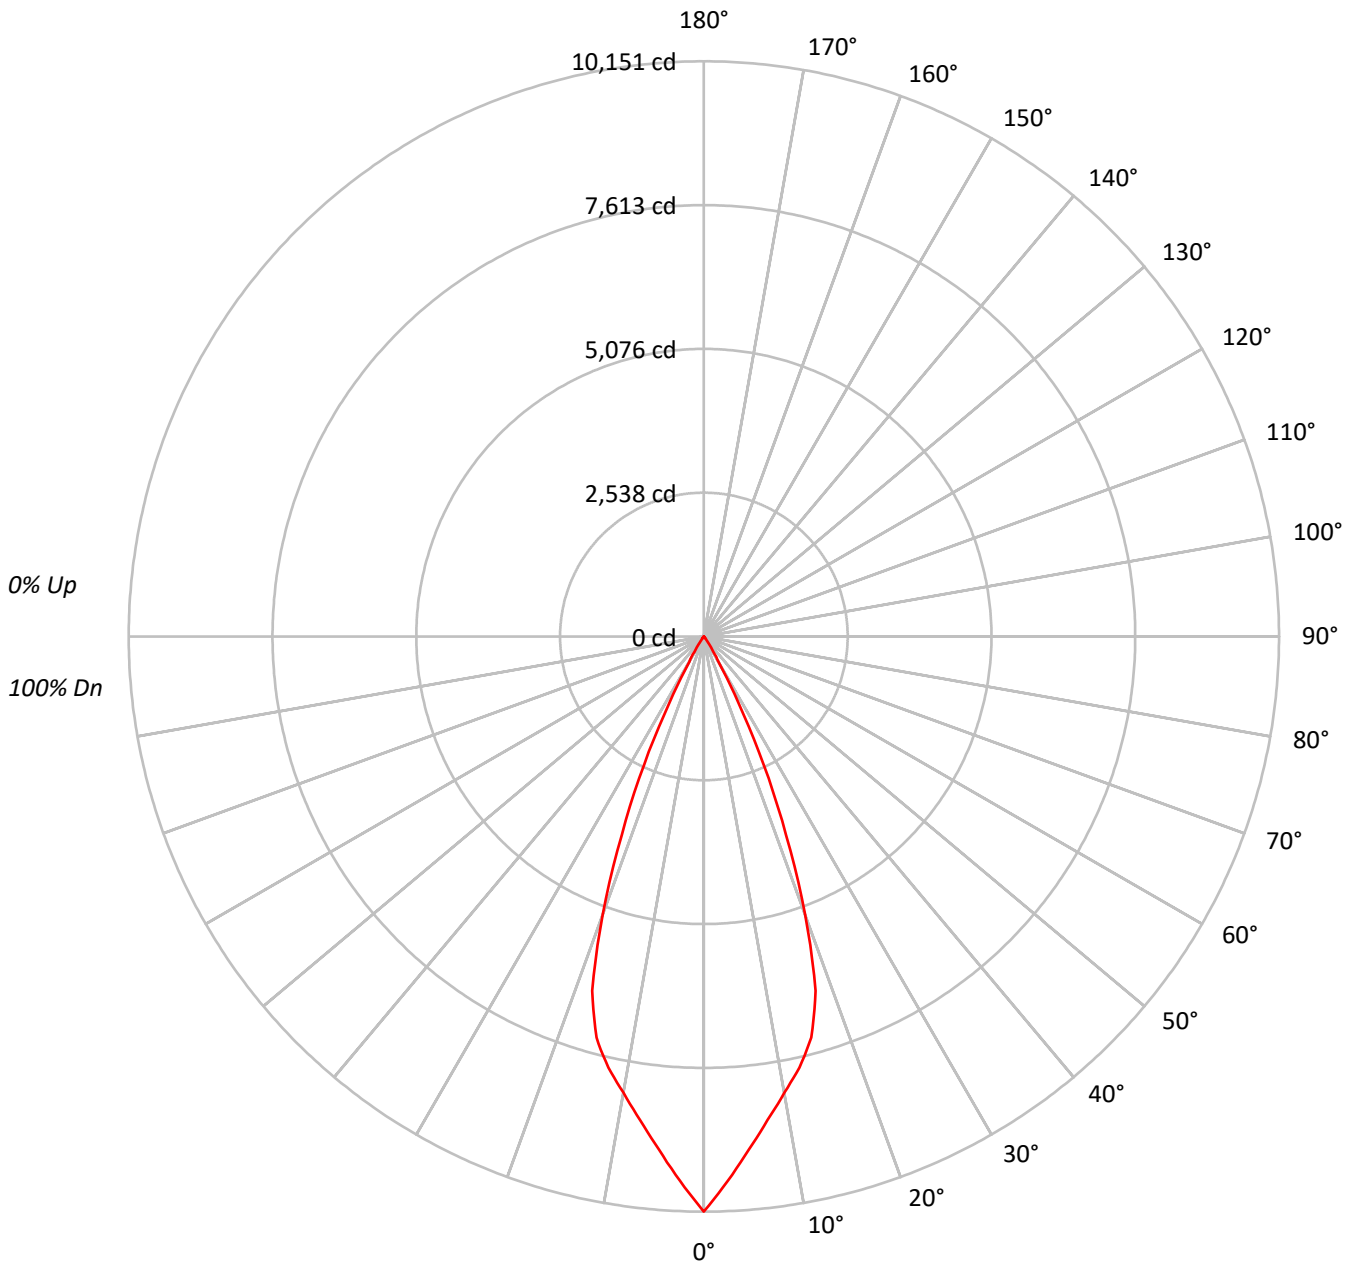



TEST NUMBER: P179617

CATALOG NUMBER: LDA6A45930D010TE LARH40FL 6LFC1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	115	112	110	108	112	110	108	107	106	105	104	103	101	100	99	98	98	96			96
2	110	107	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92			92
3	106	101	97	94	105	100	96	94	98	95	92	95	93	91	93	91	89	88			88
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84			84
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81			81
6	96	89	84	81	94	88	84	81	87	83	80	85	82	79	84	81	79	78			78
7	92	85	81	77	91	85	80	77	83	80	77	82	79	76	81	78	76	75			75
8	89	82	77	74	88	81	77	74	80	76	74	80	76	73	79	75	73	72			72
9	86	79	74	71	85	78	74	71	78	74	71	77	73	71	76	73	70	69			69
10	84	76	71	68	83	76	71	68	75	71	68	74	71	68	74	70	68	67			67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	556458
5°	500235
10°	455052
15°	415962
20°	305227
25°	150874
30°	32765
35°	6210
40°	1689
45°	760
50°	418
55°	392
60°	263
65°	311
70°	256
75°	169
80°	253
85°	0



TEST NUMBER: P179617

CATALOG NUMBER: LDA6A45930D010TE LARH40FL 6LFC1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	840.9	20.6
10°-20°	1971.5	48.4
20°-30°	1145.3	28.1
30°-40°	99.3	2.4
40°-50°	8.6	0.2
50°-60°	3.4	0.1
60°-70°	2.1	0.1
70°-80°	1.0	0.0
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3957.8	97.2
0°-40°	4057.1	99.6
0°-60°	4069.0	99.9
0°-90°	4072.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4072.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	10151	
5°	9090	841
15°	7329	1972
25°	2494	1145
35°	93	99
45°	10	9
55°	4	3
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P179617

CATALOG NUMBER: LDA6A45930D010TE LARH40FL 6LFC1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	10150.6
2.5°	9620.0
5°	9090.3
7.5°	8609.3
10°	8174.7
12.5°	7793.0
15°	7329.2
17.5°	6555.2
20°	5232.0
22.5°	3789.9
25°	2494.3
27.5°	1302.9
30°	517.6
32.5°	268.6
35°	92.8
37.5°	38.2
40°	23.6
42.5°	14.6
45°	9.8
47.5°	6.5
50°	4.9
52.5°	4.1
55°	4.1
57.5°	3.3
60°	2.4
62.5°	2.4
65°	2.4
67.5°	1.6
70°	1.6
72.5°	0.8
75°	0.8
77.5°	0.8
80°	0.8
82.5°	0.8
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)