

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P179578

Luminaire Tested: **LDA6A45935D010TE LARH20SP 6LAL1LI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P179578
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P26662)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA6A45935D010TE LARH20SP 6LAL1LI
Description: PORTFOLIO 6" Lensed Adjustable, Self-flanged, 20° Spot
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3301.4 lumens
Efficiency: N/A
Efficacy: 62.3 lumens/watt
Spacing Criteria (0/90/45): 0.37 / 0.37 / 0.47
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 53
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P179578

CATALOG NUMBER: LDA6A45935D010TE LARH20SP 6LAL1LI

Luminous Intensity Polar Plot

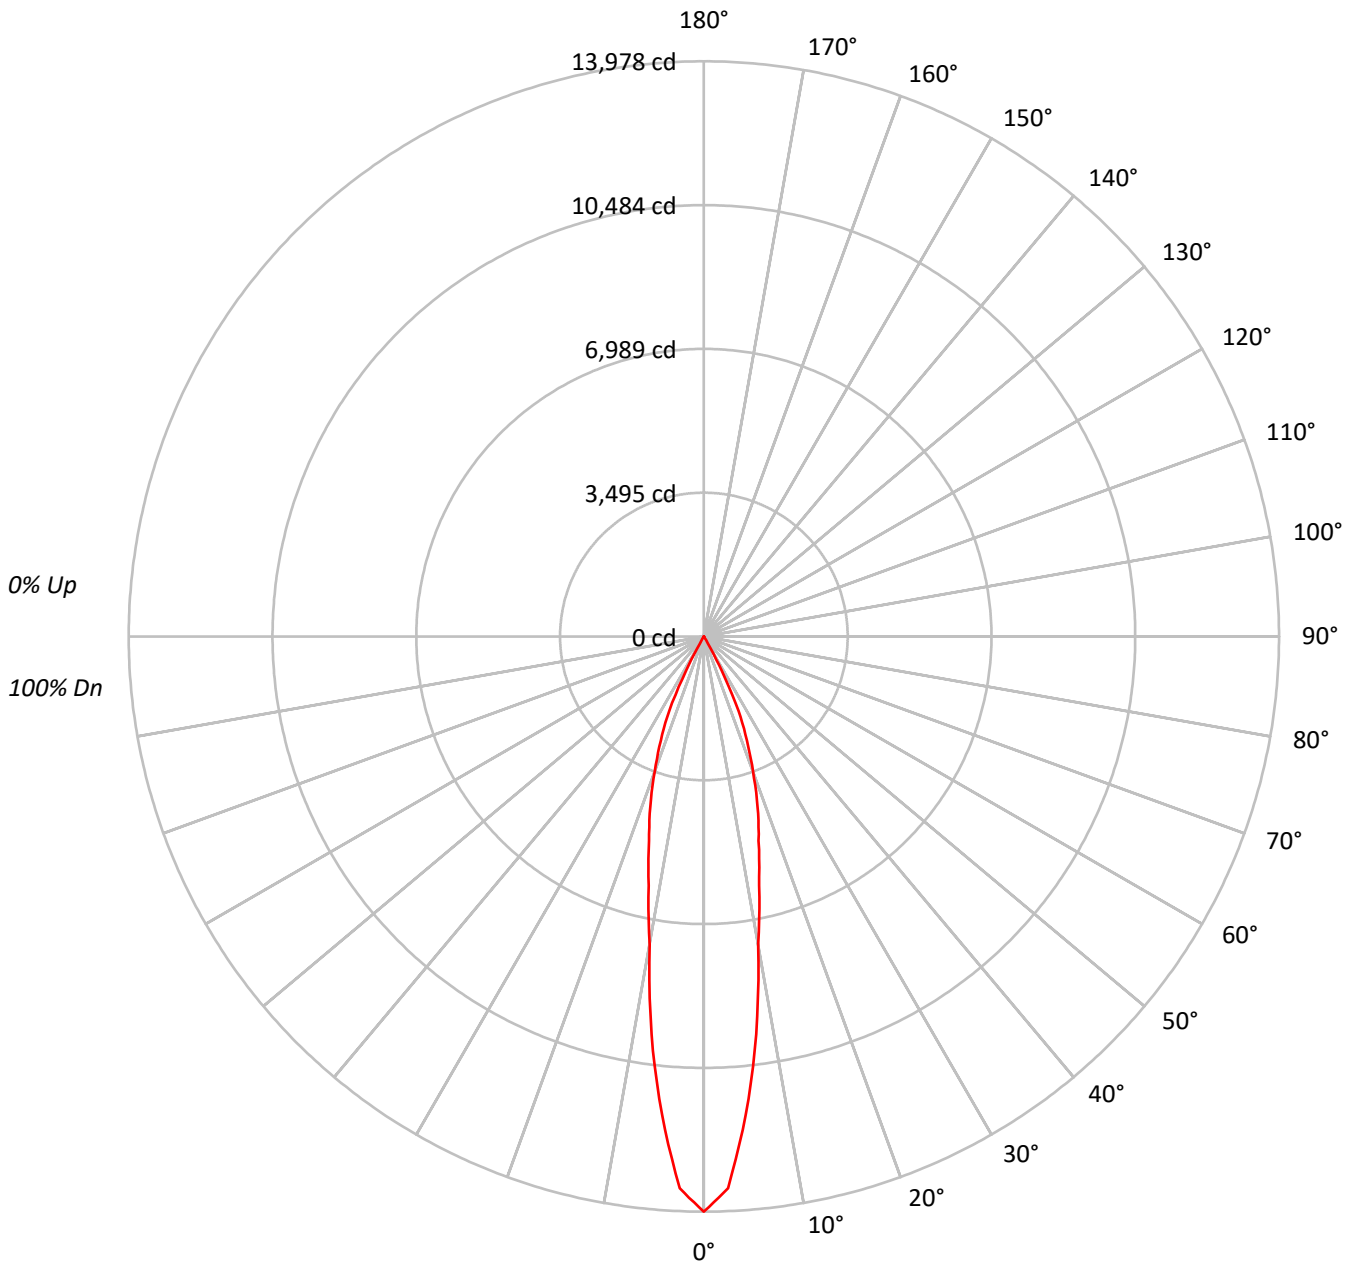



TEST NUMBER: P179578

CATALOG NUMBER: LDA6A45935D010TE LARH20SP 6LAL1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	115	113	111	109	113	111	109	107	107	105	104	103	102	101	100	99	98	96			96																
2	111	107	104	102	109	106	103	100	102	100	98	100	98	96	97	96	94			93																	
3	107	102	99	96	105	101	98	95	99	96	94	96	94	92	94	92	91			89																	
4	104	98	94	91	102	97	93	91	95	92	90	93	91	89	92	89	88			86																	
5	101	94	90	87	99	94	90	87	92	89	86	90	88	85	89	87	85			83																	
6	97	91	87	84	96	90	86	83	89	85	83	88	85	82	87	84	82			81																	
7	94	88	83	80	93	87	83	80	86	83	80	85	82	79	84	81	79			78																	
8	92	85	81	78	91	84	80	77	83	80	77	83	79	77	82	79	77			76																	
9	89	82	78	75	88	82	78	75	81	77	75	80	77	75	79	76	74			73																	
10	87	80	75	73	86	79	75	73	79	75	72	78	75	72	77	74	72			71																	

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	766276
5°	642415
10°	422777
15°	291670
20°	203269
25°	121168
30°	12496
35°	1191
40°	730
45°	527
50°	503
55°	726
60°	746
65°	662
70°	545
75°	530
80°	537
85°	503



TEST NUMBER: P179578

CATALOG NUMBER: LDA6A45935D010TE LARH20SP 6LAL1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	988.4	29.9
10°-20°	1446.5	43.8
20°-30°	822.4	24.9
30°-40°	23.6	0.7
40°-50°	5.6	0.2
50°-60°	6.4	0.2
60°-70°	5.0	0.2
70°-80°	2.7	0.1
80°-90°	0.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3257.4	98.7
0°-40°	3281.0	99.4
0°-60°	3293.0	99.7
0°-90°	3301.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3301.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	13978	
5°	11674	988
15°	5139	1447
25°	2003	822
35°	18	24
45°	7	6
55°	8	6
65°	5	5
75°	2	3
85°	1	1
90°	0	



TEST NUMBER: P179578

CATALOG NUMBER: LDA6A45935D010TE LARH20SP 6LAL1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	13978.0
2.5°	13421.3
5°	11674.0
7.5°	9755.6
10°	7594.9
12.5°	6195.9
15°	5139.2
17.5°	4341.9
20°	3484.3
22.5°	2734.4
25°	2003.2
27.5°	928.7
30°	197.4
32.5°	24.6
35°	17.8
37.5°	13.6
40°	10.2
42.5°	8.5
45°	6.8
47.5°	5.9
50°	5.9
52.5°	6.8
55°	7.6
57.5°	7.6
60°	6.8
62.5°	5.9
65°	5.1
67.5°	4.2
70°	3.4
72.5°	3.4
75°	2.5
77.5°	1.7
80°	1.7
82.5°	0.8
85°	0.8
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)