

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P35285

Luminaire Tested: **LSR6B10D010BZ EC6B10209027 6LBWLI1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P35285
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR6B10D010BZ EC6B10209027 6LBWLI1
Description: PORTFOLIO 6IN CYLINDER
WIDE DISTRIBUTION WITH SPECULAR CLEAR TRIM
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W
DL3-11.1 W DLE-11.39 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 882.0 lumens
Efficiency: N/A
Efficacy: 90.9 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.18
Luminous Opening: Circular (Dia: 0.46' x H: 0')
CIE Type: Direct


Input Watts (W): 9.7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P35285

CATALOG NUMBER: LSR6B10D010BZ EC6B10209027 6LBWLI1

Luminous Intensity Polar Plot

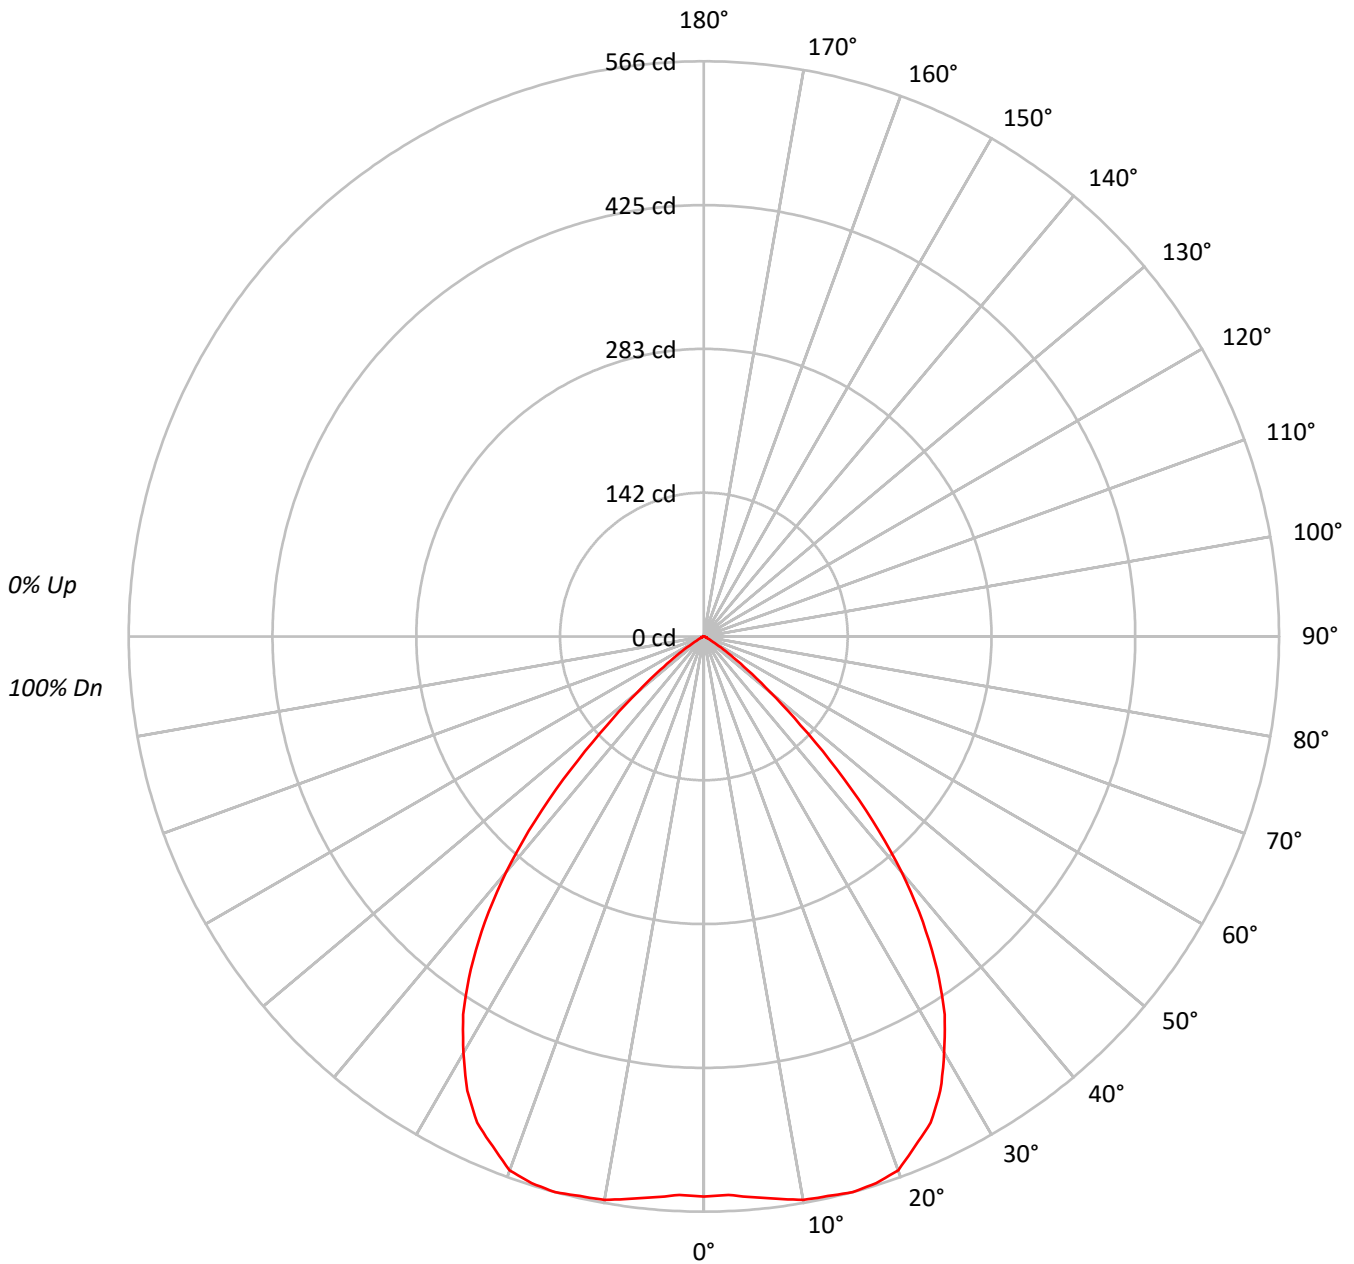



TEST NUMBER: P35285

CATALOG NUMBER: LSR6B10D010BZ EC6B10209027 6LBWLI1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20									
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																			
RCR																																														
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100											100																	
1	113	110	107	104	110	107	105	103	103	101	99	100	98	97	96	95	94	92											92																	
2	106	101	96	92	104	99	95	91	95	92	89	92	90	87	90	87	85	83											83																	
3	100	92	87	82	97	91	86	81	88	84	80	86	82	79	83	80	77	76											76																	
4	93	85	78	73	92	84	78	73	81	76	72	79	75	71	77	74	70	69											69																	
5	88	78	71	66	86	77	71	66	75	70	65	73	69	65	72	68	64	63											63																	
6	82	72	65	60	81	71	65	60	70	64	59	68	63	59	67	62	59	57											57																	
7	77	67	60	55	76	66	59	55	65	59	54	63	58	54	62	57	54	52											52																	
8	73	62	55	50	71	61	55	50	60	54	50	59	54	50	58	53	49	48											48																	
9	69	57	51	46	67	57	50	46	56	50	46	55	50	46	54	49	46	44											44																	
10	65	54	47	43	64	53	47	42	52	46	42	51	46	42	51	46	42	41											41																	

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	35948
5°	36281
10°	37297
15°	38229
20°	38810
25°	38008
30°	35633
35°	31858
40°	25805
45°	17069
50°	8627
55°	3640
60°	1174
65°	463
70°	382
75°	252
80°	0
85°	0



TEST NUMBER: P35285

CATALOG NUMBER: LSR6B10D010BZ EC6B10209027 6LBWLI1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	53.2	6.0
10°-20°	159.8	18.1
20°-30°	240.8	27.3
30°-40°	246.5	27.9
40°-50°	143.6	16.3
50°-60°	33.0	3.7
60°-70°	4.1	0.5
70°-80°	1.1	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	453.8	51.4
0°-40°	700.3	79.4
0°-60°	876.9	99.4
0°-90°	882.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	882.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	551	
5°	554	53
15°	566	160
25°	528	241
35°	400	247
45°	185	144
55°	32	33
65°	3	4
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P35285

CATALOG NUMBER: LSR6B10D010BZ EC6B10209027 6LBWLI1

CANDELA DISTRIBUTION (FULL):

	0°
0°	551
2.5°	550
5°	554
7.5°	558
10°	563
12.5°	564
15°	566
17.5°	564
20°	559
22.5°	543
25°	528
27.5°	504
30°	473
32.5°	441
35°	400
37.5°	354
40°	303
42.5°	246
45°	185
47.5°	129
50°	85
52.5°	54
55°	32
57.5°	17
60°	9
62.5°	5
65°	3
67.5°	3
70°	2
72.5°	1
75°	1
77.5°	1
80°	0
82.5°	0
85°	0
87.5°	0
90°	0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)