

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P202799

Luminaire Tested: **LSR6B10D010BZ EC6B10208030 6LBWWH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P202799  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR6B10D010BZ EC6B10208030 6LBWWH1  
Description: PORTFOLIO 6IN CYLINDER  
WIDE DISTRIBUTION WITH WHEAT TRIM  
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W  
DL3-11.1 W DLE-11.39 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 971.9 lumens  
Efficiency: N/A  
Efficacy: 98.2 lumens/watt  
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.18  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 9.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P202799

CATALOG NUMBER: LSR6B10D010BZ EC6B10208030 6LBWWH1

### Luminous Intensity Polar Plot

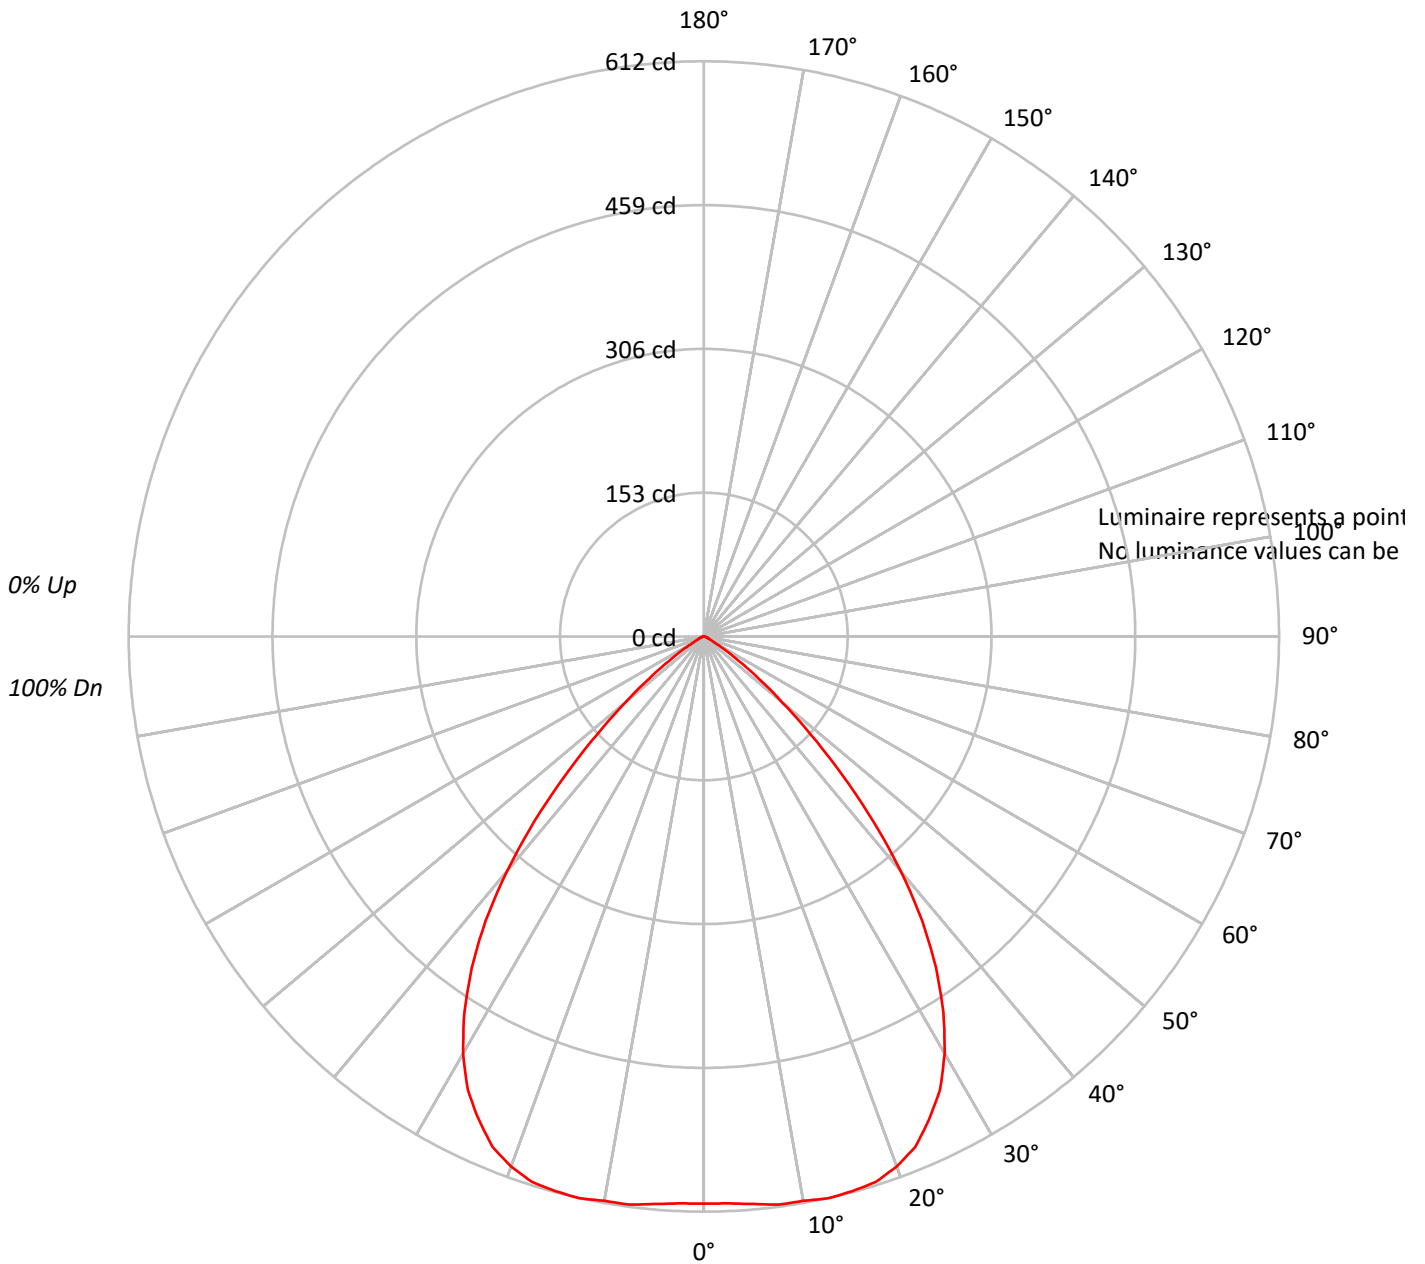



TEST NUMBER: P202799

CATALOG NUMBER: LSR6B10D010BZ EC6B10208030 6LBWWH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	109	107	104	110	107	105	102	103	101	99	99	98	96	96	95	93	92		
2	106	100	96	92	104	98	94	91	95	92	89	92	89	87	89	87	85	83		
3	99	92	86	81	97	90	85	81	88	83	79	85	81	78	83	80	77	75		
4	93	84	78	73	91	83	77	72	81	76	71	79	74	71	77	73	70	68		
5	87	77	71	66	85	76	70	65	75	69	65	73	68	64	71	67	63	62		
6	82	71	64	59	80	71	64	59	69	63	59	67	62	58	66	61	58	56		
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51		
8	72	61	54	49	71	61	54	49	59	53	49	58	53	49	57	52	49	47		
9	68	57	50	45	67	56	50	45	55	49	45	54	49	45	53	48	45	43		
10	64	53	46	42	63	53	46	42	52	46	42	51	45	42	50	45	41	40		

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P202799

CATALOG NUMBER: LSR6B10D010BZ EC6B10208030 6LBWWH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	58.0	6.0
10°-20°	172.5	17.8
20°-30°	259.7	26.7
30°-40°	265.6	27.3
40°-50°	161.3	16.6
50°-60°	45.4	4.7
60°-70°	6.9	0.7
70°-80°	2.2	0.2
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	490.3	50.4
0°-40°	755.9	77.8
0°-60°	962.6	99.0
0°-90°	971.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	971.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	604	
5°	606	58
15°	611	173
25°	567	260
35°	430	266
45°	207	161
55°	45	45
65°	6	7
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P202799

CATALOG NUMBER: LSR6B10D010BZ EC6B10208030 6LBWWH1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	603.6
2.5°	603.6
5°	606.1
7.5°	609.7
10°	609.7
12.5°	612.2
15°	610.9
17.5°	608.5
20°	600.0
22.5°	587.8
25°	567.0
27.5°	543.9
30°	512.2
32.5°	474.4
35°	430.5
37.5°	381.7
40°	325.6
42.5°	267.1
45°	207.3
47.5°	153.7
50°	108.5
52.5°	73.2
55°	45.1
57.5°	26.8
60°	13.4
62.5°	8.5
65°	6.1
67.5°	4.9
70°	3.7
72.5°	2.4
75°	2.4
77.5°	1.2
80°	1.2
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)