

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P204040

Luminaire Tested: **LSR6B10D010BZ EC6B10209030 6LBNMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204040
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR6B10D010BZ EC6B10209030 6LBNMW1
Description: PORTFOLIO 6IN CYLINDER
NARROW DISTRIBUTION WITH MATTE WHITE TRIM
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W
DL3-11.1 W DLE-11.39 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 655.3 lumens
Efficiency: N/A
Efficacy: 66.2 lumens/watt
Spacing Criteria (0/90/45): 0.99 / 0.99 / 0.97
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204040

CATALOG NUMBER: LSR6B10D010BZ EC6B10209030 6LBNMW1

Luminous Intensity Polar Plot

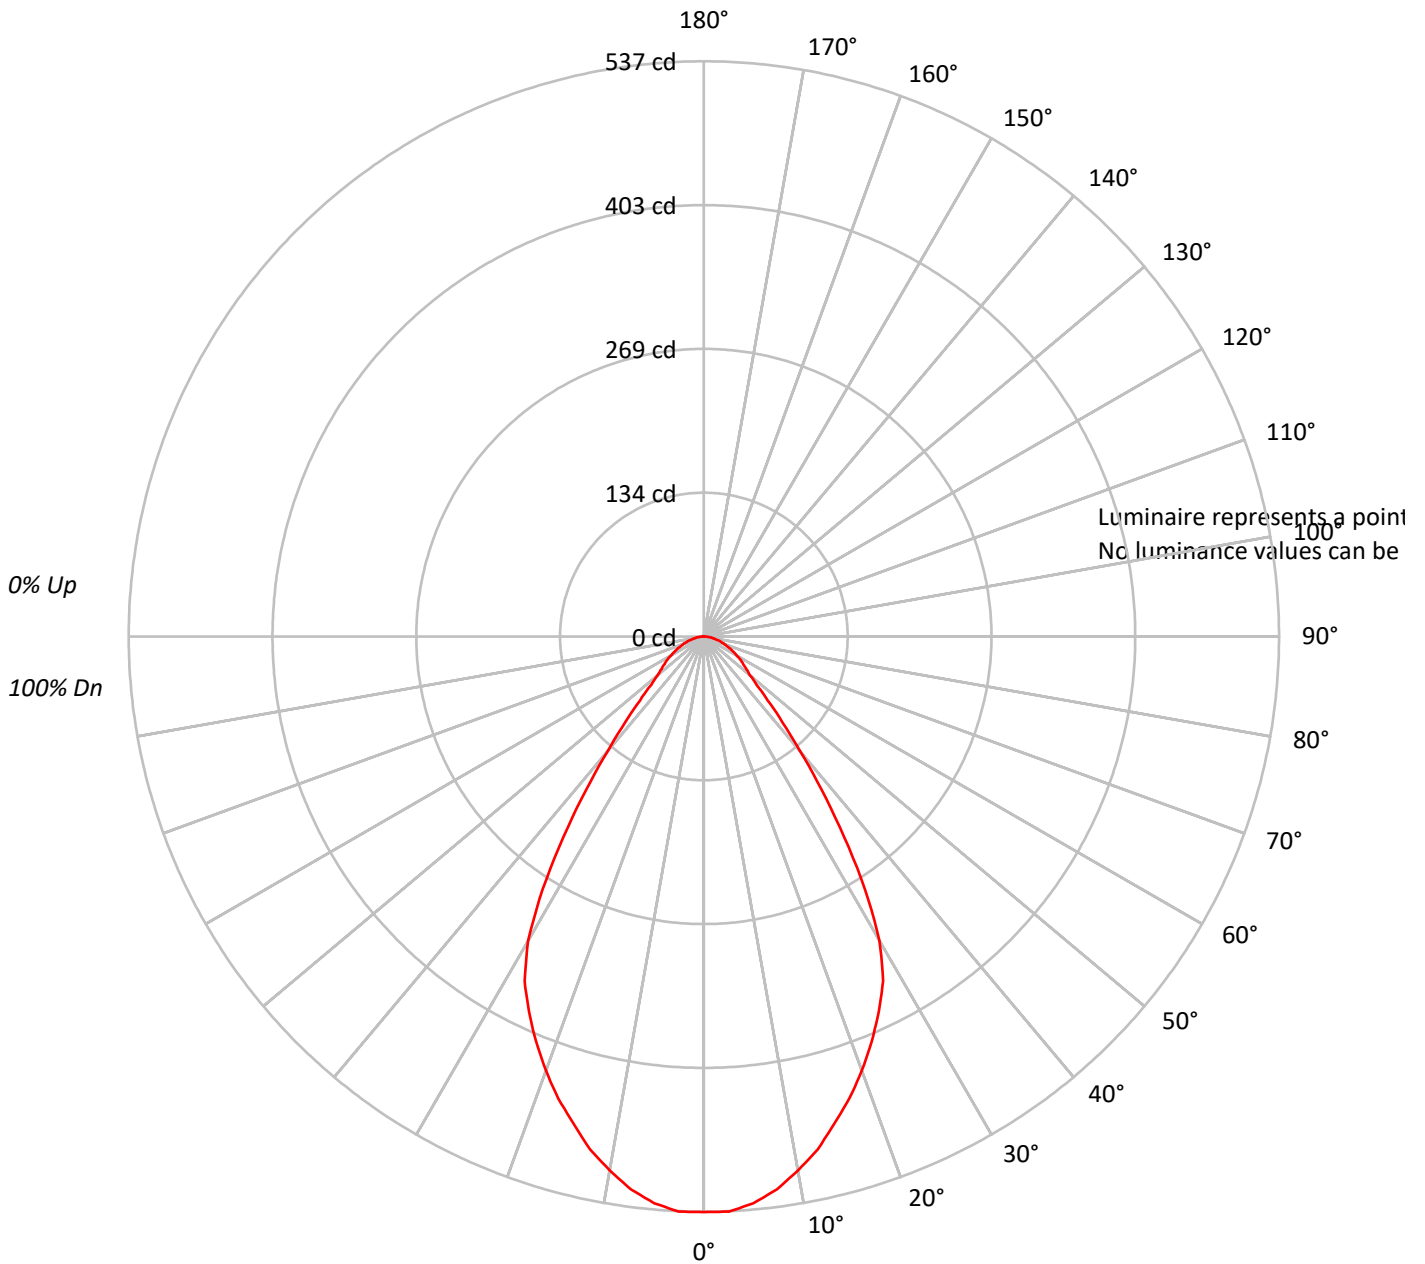



TEST NUMBER: P204040

CATALOG NUMBER: LSR6B10D010BZ EC6B10209030 6LBNMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20																	
RC	80									70									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																					
RCR	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																																			
	1	112	108	105	103	109	106	103	101	102	100	98	98	97	95	95	93	92	90																																			
	2	105	99	94	90	102	97	92	89	94	90	87	91	87	85	88	85	83	81																																			
	3	98	90	84	79	96	89	83	79	86	81	77	84	80	76	81	78	75	73																																			
	4	92	83	76	71	90	82	76	71	80	74	70	77	73	69	75	71	68	66																																			
	5	87	77	70	65	85	76	69	64	74	68	64	72	67	63	70	66	62	61																																			
	6	81	71	64	59	80	70	63	59	68	63	58	67	62	58	66	61	57	56																																			
	7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51																																			
	8	72	61	55	50	71	61	54	50	60	54	49	59	53	49	58	53	49	47																																			
	9	69	58	51	46	67	57	51	46	56	50	46	55	50	46	54	49	46	44																																			
	10	65	54	47	43	64	54	47	43	53	47	43	52	46	43	51	46	43	41																																			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204040

CATALOG NUMBER: LSR6B10D010BZ EC6B10209030 6LBNMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	49.9	7.6
10°-20°	132.3	20.2
20°-30°	176.6	27.0
30°-40°	142.5	21.7
40°-50°	68.3	10.4
50°-60°	40.5	6.2
60°-70°	26.9	4.1
70°-80°	14.4	2.2
80°-90°	3.9	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	358.8	54.8
0°-40°	501.3	76.5
0°-60°	610.0	93.1
0°-90°	655.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	655.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	537	
5°	531	50
15°	471	132
25°	386	177
35°	228	142
45°	84	68
55°	45	40
65°	27	27
75°	14	14
85°	3	4
90°	0	



TEST NUMBER: P204040

CATALOG NUMBER: LSR6B10D010BZ EC6B10209030 6LBNMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	537.4
2.5°	537.4
5°	531.1
7.5°	520.7
10°	506.1
12.5°	490.5
15°	470.7
17.5°	452.0
20°	431.2
22.5°	409.3
25°	386.4
27.5°	362.4
30°	328.1
32.5°	280.2
35°	228.1
37.5°	180.2
40°	139.6
42.5°	108.3
45°	84.4
47.5°	66.7
50°	56.2
52.5°	50.0
55°	44.8
57.5°	40.6
60°	35.4
62.5°	31.2
65°	27.1
67.5°	22.9
70°	19.8
72.5°	16.7
75°	13.5
77.5°	10.4
80°	8.3
82.5°	6.2
85°	3.1
87.5°	1.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)