

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P202697

Luminaire Tested: **LSR6B10D010BZ EC6B10208035 6LBWH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P202697  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR6B10D010BZ EC6B10208035 6LBWH1  
Description: PORTFOLIO 6IN CYLINDER  
WIDE DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM  
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W  
DL3-11.1 W DLE-11.39 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 963.3 lumens  
Efficiency: N/A  
Efficacy: 97.3 lumens/watt  
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.16  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 9.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P202697

CATALOG NUMBER: LSR6B10D010BZ EC6B10208035 6LBWH1

### Luminous Intensity Polar Plot

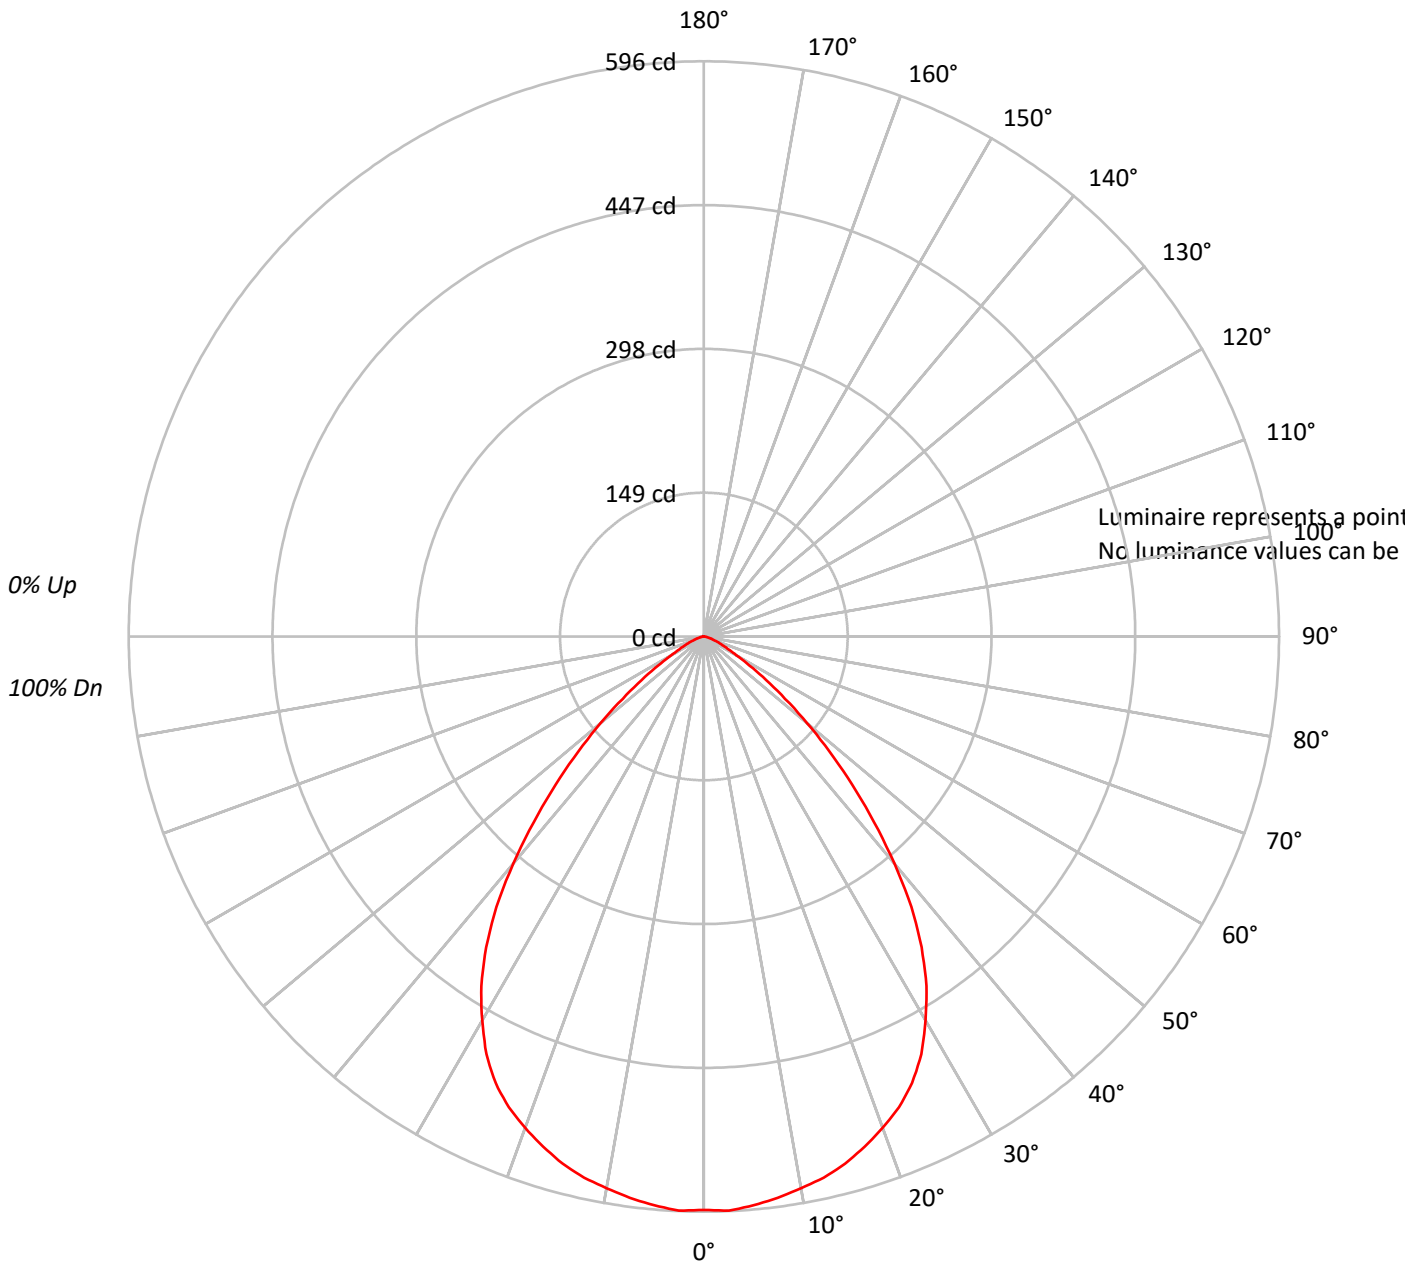



TEST NUMBER: P202697

CATALOG NUMBER: LSR6B10D010BZ EC6B10208035 6LBWH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									20																	
RC	80									70									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																					
RCR																																																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																																				
1	112	109	106	103	110	107	104	101	103	100	98	99	97	95	95	94	93	91																																				
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81																																				
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75	73																																				
4	92	82	75	70	90	81	75	70	79	73	69	77	72	68	75	71	67	65																																				
5	86	75	68	63	84	74	68	63	72	66	62	71	65	61	69	64	61	59																																				
6	80	69	62	57	78	68	61	56	67	61	56	65	60	56	64	59	55	53																																				
7	75	64	56	51	73	63	56	51	62	55	51	60	55	51	59	54	50	49																																				
8	70	59	52	47	69	58	51	47	57	51	46	56	50	46	55	50	46	44																																				
9	66	55	48	43	65	54	47	43	53	47	43	52	47	42	51	46	42	41																																				
10	62	51	44	40	61	50	44	39	50	43	39	49	43	39	48	43	39	38																																				

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P202697

CATALOG NUMBER: LSR6B10D010BZ EC6B10208035 6LBWH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	56.1	5.8
10°-20°	159.3	16.5
20°-30°	233.5	24.2
30°-40°	243.0	25.2
40°-50°	168.1	17.5
50°-60°	73.2	7.6
60°-70°	22.4	2.3
70°-80°	6.7	0.7
80°-90°	1.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	448.9	46.6
0°-40°	691.9	71.8
0°-60°	933.2	96.9
0°-90°	963.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	963.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	594	
5°	592	56
15°	566	159
25°	511	234
35°	393	243
45°	217	168
55°	79	73
65°	21	22
75°	6	7
85°	1	1
90°	0	



TEST NUMBER: P202697

CATALOG NUMBER: LSR6B10D010BZ EC6B10208035 6LBWH1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	594.2
2.5°	595.5
5°	591.7
7.5°	586.7
10°	580.5
12.5°	574.3
15°	565.5
17.5°	554.3
20°	541.8
22.5°	528.1
25°	510.6
27.5°	488.1
30°	459.4
32.5°	429.4
35°	393.2
37.5°	353.3
40°	307.1
42.5°	260.9
45°	217.2
47.5°	176.0
50°	139.8
52.5°	106.1
55°	78.6
57.5°	56.2
60°	38.7
62.5°	28.7
65°	21.2
67.5°	16.2
70°	11.2
72.5°	8.7
75°	6.2
77.5°	3.7
80°	2.5
82.5°	1.2
85°	1.2
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)