

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P202699

Luminaire Tested: **LSR6B10D010BZ EC6B10208050 6LBWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P202699
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR6B10D010BZ EC6B10208050 6LBWH1
Description: PORTFOLIO 6IN CYLINDER
WIDE DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W
DL3-11.1 W DLE-11.39 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 974.0 lumens
Efficiency: N/A
Efficacy: 98.4 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.16
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P202699

CATALOG NUMBER: LSR6B10D010BZ EC6B10208050 6LBWH1

Luminous Intensity Polar Plot

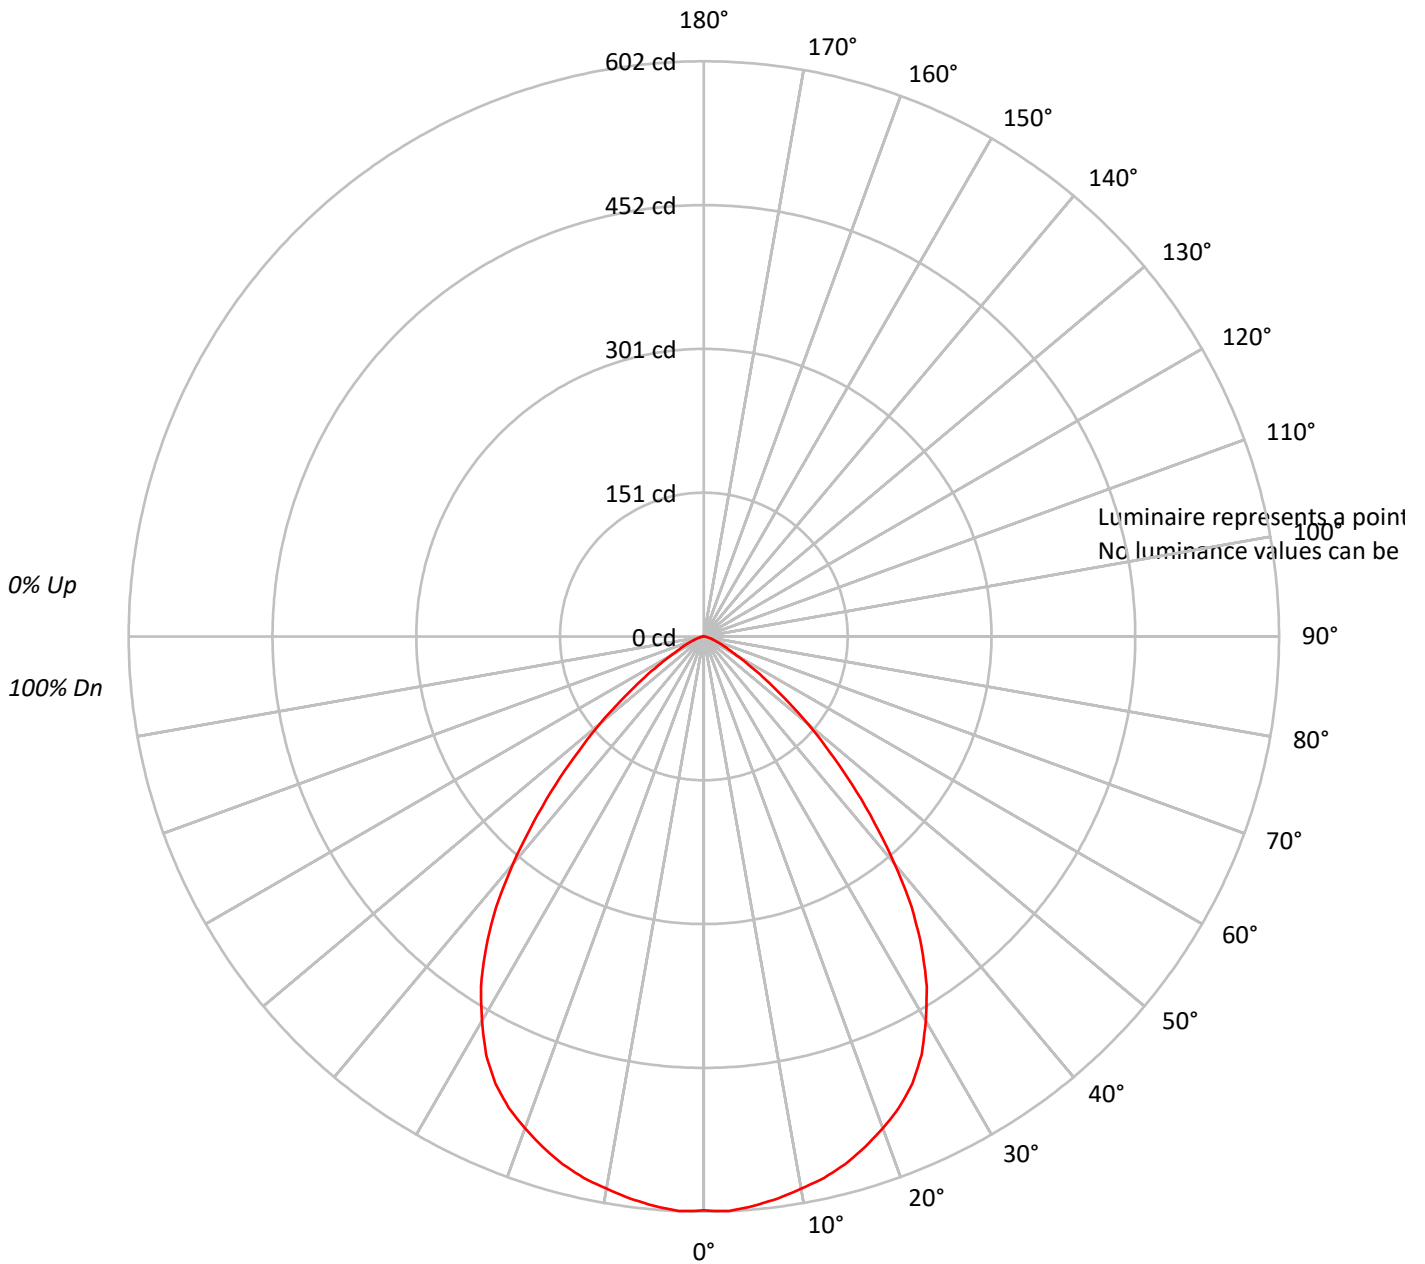



TEST NUMBER: P202699

CATALOG NUMBER: LSR6B10D010BZ EC6B10208050 6LBWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	101	103	100	98	99	97	95	95	94	93	91																			
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81																			
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75	73																			
4	92	82	75	70	90	81	75	70	79	73	69	77	72	68	75	71	67	65																			
5	86	75	68	63	84	74	68	63	72	66	62	71	65	61	69	64	61	59																			
6	80	69	62	57	78	68	61	56	67	61	56	65	60	56	64	59	55	53																			
7	75	64	56	51	73	63	56	51	62	55	51	60	55	51	59	54	50	49																			
8	70	59	52	47	69	58	51	47	57	51	46	56	50	46	55	50	46	44																			
9	66	55	48	43	65	54	47	43	53	47	43	52	47	42	51	46	42	41																			
10	62	51	44	40	61	50	44	39	50	43	39	49	43	39	48	43	39	38																			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P202699

CATALOG NUMBER: LSR6B10D010BZ EC6B10208050 6LBWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	56.7	5.8
10°-20°	161.0	16.5
20°-30°	236.1	24.2
30°-40°	245.7	25.2
40°-50°	170.0	17.5
50°-60°	74.0	7.6
60°-70°	22.7	2.3
70°-80°	6.8	0.7
80°-90°	1.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	453.8	46.6
0°-40°	699.5	71.8
0°-60°	943.5	96.9
0°-90°	974.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	974.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	601	
5°	598	57
15°	572	161
25°	516	236
35°	398	246
45°	220	170
55°	80	74
65°	22	23
75°	6	7
85°	1	1
90°	0	



TEST NUMBER: P202699

CATALOG NUMBER: LSR6B10D010BZ EC6B10208050 6LBWH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	600.7
2.5°	602.0
5°	598.2
7.5°	593.2
10°	586.9
12.5°	580.5
15°	571.7
17.5°	560.4
20°	547.7
22.5°	533.9
25°	516.2
27.5°	493.5
30°	464.4
32.5°	434.1
35°	397.5
37.5°	357.2
40°	310.5
42.5°	263.8
45°	219.6
47.5°	178.0
50°	141.4
52.5°	107.3
55°	79.5
57.5°	56.8
60°	39.1
62.5°	29.0
65°	21.5
67.5°	16.4
70°	11.4
72.5°	8.8
75°	6.3
77.5°	3.8
80°	2.5
82.5°	1.3
85°	1.3
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)