

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P202502

Luminaire Tested: **LSR6B15D010BZ EC6B10208027 6LBSWMH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P202502
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR6B15D010BZ EC6B10208027 6LBSWMH1
Description: PORTFOLIO 6IN CYLINDER
SHALLOW DISTRIBUTION WITH WARM HAZE TRIM
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W
DL3-15.28 W DLE-15.432 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1474.3 lumens
Efficiency: N/A
Efficacy: 103.1 lumens/watt
Spacing Criteria (0/90/45): 0.97 / 0.97 / 1.1
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P202502

CATALOG NUMBER: LSR6B15D010BZ EC6B10208027 6LBSWMH1

Luminous Intensity Polar Plot

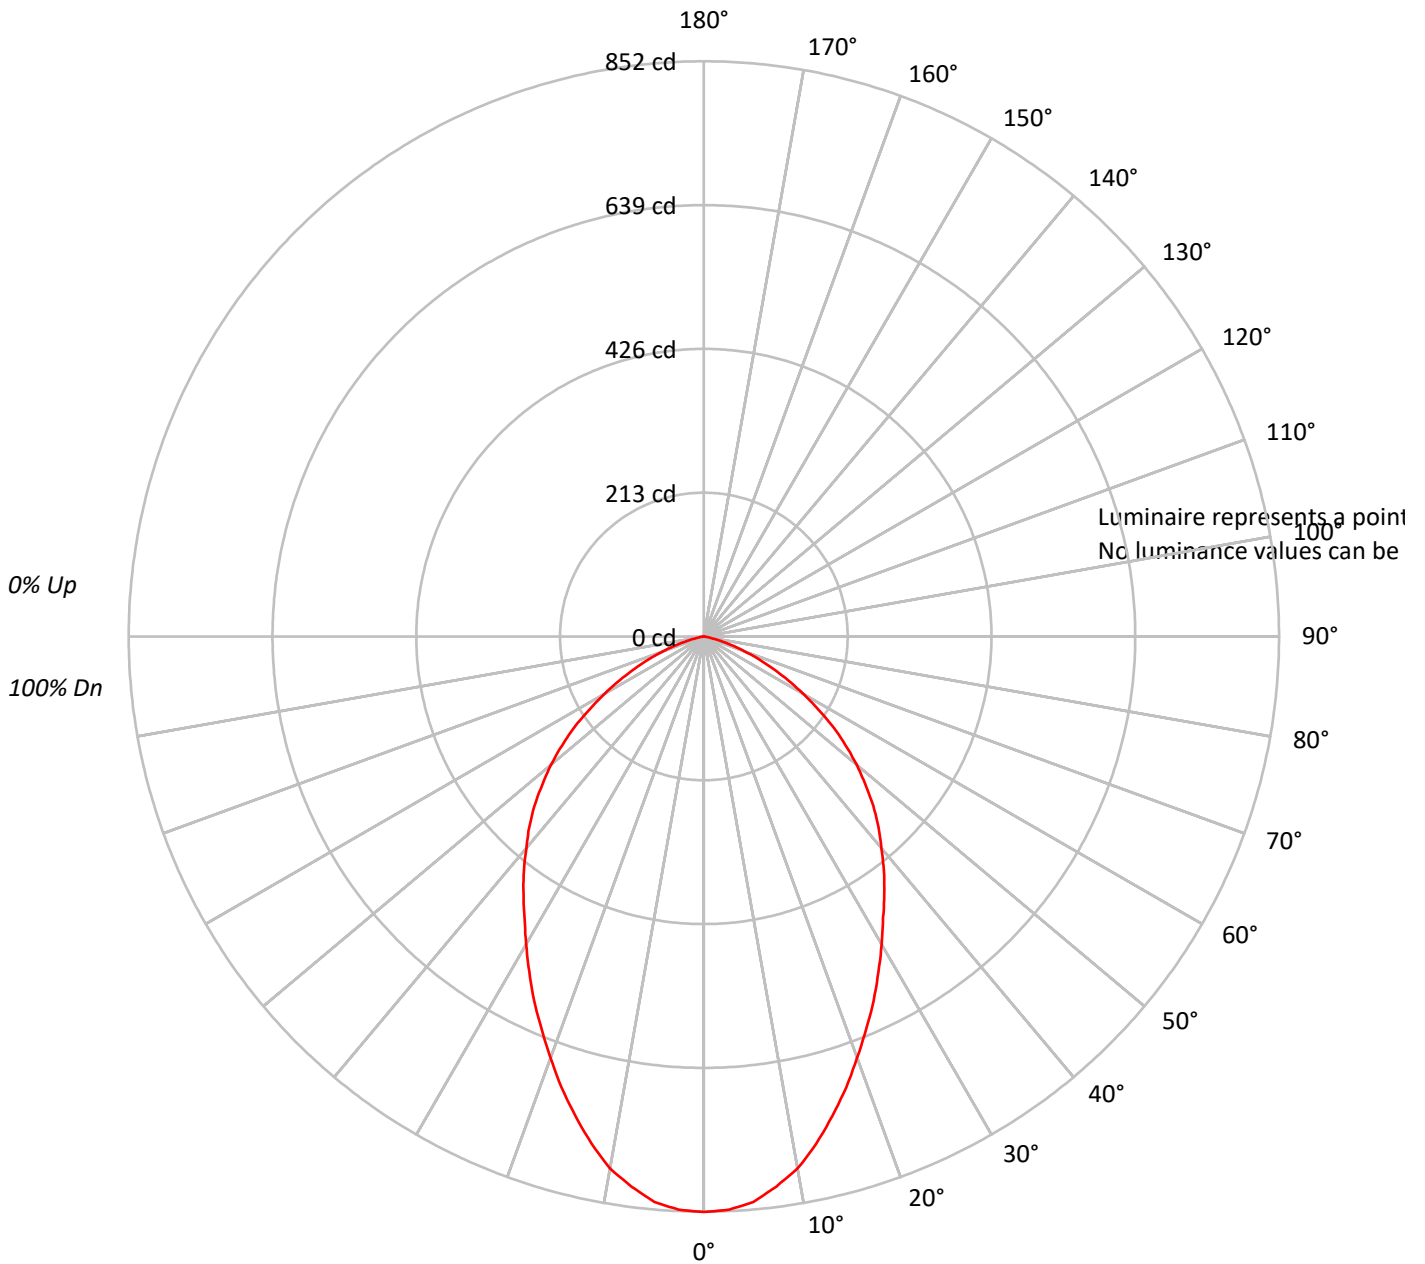



TEST NUMBER: P202502

CATALOG NUMBER: LSR6B15D010BZ EC6B10208027 6LBSWMH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|--|--|--|--|--|--|----|--|--|--|--|--|--|--|--|---|
| RF | 20 | | | | | | | | | 20 | | | | | | | | | 20 | | | | | | | | | 20 | | | | | | | | | |
| RC | 80 | | | | | | | | | 50 | | | | | | | | | 30 | | | | | | | | | 10 | | | | | | | | | 0 |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 | | | | | | | | | | | | | | | | |
| RCR | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | | | | | | | | | | | | | | | | | | |
| 1 | 111 | 107 | 104 | 101 | 108 | 105 | 102 | 99 | 101 | 98 | 96 | 97 | 95 | 93 | 94 | 92 | 90 | 88 | | | | | | | | | | | | | | | | | | | |
| 2 | 103 | 96 | 90 | 85 | 100 | 94 | 89 | 84 | 91 | 86 | 82 | 87 | 84 | 81 | 84 | 81 | 79 | 77 | | | | | | | | | | | | | | | | | | | |
| 3 | 95 | 86 | 79 | 73 | 92 | 84 | 78 | 73 | 81 | 76 | 71 | 79 | 74 | 70 | 76 | 72 | 69 | 67 | | | | | | | | | | | | | | | | | | | |
| 4 | 88 | 77 | 70 | 64 | 86 | 76 | 69 | 63 | 74 | 67 | 62 | 71 | 66 | 62 | 69 | 65 | 61 | 59 | | | | | | | | | | | | | | | | | | | |
| 5 | 81 | 70 | 62 | 56 | 79 | 69 | 61 | 56 | 67 | 60 | 55 | 65 | 59 | 55 | 63 | 58 | 54 | 52 | | | | | | | | | | | | | | | | | | | |
| 6 | 76 | 64 | 56 | 50 | 74 | 63 | 55 | 50 | 61 | 54 | 49 | 59 | 53 | 49 | 58 | 53 | 48 | 47 | | | | | | | | | | | | | | | | | | | |
| 7 | 70 | 58 | 50 | 45 | 69 | 57 | 50 | 45 | 56 | 49 | 44 | 55 | 48 | 44 | 53 | 48 | 44 | 42 | | | | | | | | | | | | | | | | | | | |
| 8 | 66 | 54 | 46 | 40 | 64 | 53 | 45 | 40 | 52 | 45 | 40 | 50 | 44 | 40 | 49 | 44 | 40 | 38 | | | | | | | | | | | | | | | | | | | |
| 9 | 62 | 49 | 42 | 37 | 61 | 49 | 42 | 37 | 48 | 41 | 37 | 47 | 41 | 36 | 46 | 40 | 36 | 35 | | | | | | | | | | | | | | | | | | | |
| 10 | 58 | 46 | 39 | 34 | 57 | 45 | 38 | 34 | 45 | 38 | 34 | 44 | 38 | 33 | 43 | 37 | 33 | 32 | | | | | | | | | | | | | | | | | | | |

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P202502

CATALOG NUMBER: LSR6B15D010BZ EC6B10208027 6LBSWMH1

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 78.9 | 5.3 |
| 10°-20° | 206.2 | 14.0 |
| 20°-30° | 273.4 | 18.5 |
| 30°-40° | 291.6 | 19.8 |
| 40°-50° | 272.6 | 18.5 |
| 50°-60° | 207.9 | 14.1 |
| 60°-70° | 113.1 | 7.7 |
| 70°-80° | 30.3 | 2.1 |
| 80°-90° | 0.4 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 558.5 | 37.9 |
| 0°-40° | 850.1 | 57.7 |
| 0°-60° | 1330.5 | 90.2 |
| 0°-90° | 1474.3 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 1474.3 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|-----|------|
| 0° | 852 | |
| 5° | 841 | 79 |
| 15° | 735 | 206 |
| 25° | 595 | 273 |
| 35° | 466 | 292 |
| 45° | 355 | 273 |
| 55° | 234 | 208 |
| 65° | 113 | 113 |
| 75° | 26 | 30 |
| 85° | 0 | 0 |
| 90° | 0 | |



TEST NUMBER: P202502

CATALOG NUMBER: LSR6B15D010BZ EC6B10208027 6LBSWMH1

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|-------|
| 0° | 852.5 |
| 2.5° | 849.8 |
| 5° | 840.8 |
| 7.5° | 821.8 |
| 10° | 800.1 |
| 12.5° | 769.4 |
| 15° | 735.1 |
| 17.5° | 700.8 |
| 20° | 663.8 |
| 22.5° | 628.6 |
| 25° | 595.1 |
| 27.5° | 559.9 |
| 30° | 526.5 |
| 32.5° | 494.0 |
| 35° | 466.0 |
| 37.5° | 438.0 |
| 40° | 409.1 |
| 42.5° | 382.9 |
| 45° | 354.9 |
| 47.5° | 324.2 |
| 50° | 295.3 |
| 52.5° | 264.6 |
| 55° | 233.9 |
| 57.5° | 200.5 |
| 60° | 169.8 |
| 62.5° | 140.9 |
| 65° | 112.9 |
| 67.5° | 87.6 |
| 70° | 64.1 |
| 72.5° | 44.3 |
| 75° | 26.2 |
| 77.5° | 11.7 |
| 80° | 2.7 |
| 82.5° | 0.0 |
| 85° | 0.0 |
| 87.5° | 0.0 |
| 90° | 0.0 |



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)