

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P205381

Luminaire Tested: **LSR6B15D010BZ EC6B10208030 6LBSLI1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P205381  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR6B15D010BZ EC6B10208030 6LBSLI1  
Description: PORTFOLIO 6IN CYLINDER  
SHALLOW DISTRIBUTION WITH SPECULAR CLEAR TRIM  
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W  
DL3-15.28 W DLE-15.432 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1580.6 lumens  
Efficiency: N/A  
Efficacy: 110.5 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 1.04  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P205381

CATALOG NUMBER: LSR6B15D010BZ EC6B10208030 6LBSLI1

### Luminous Intensity Polar Plot

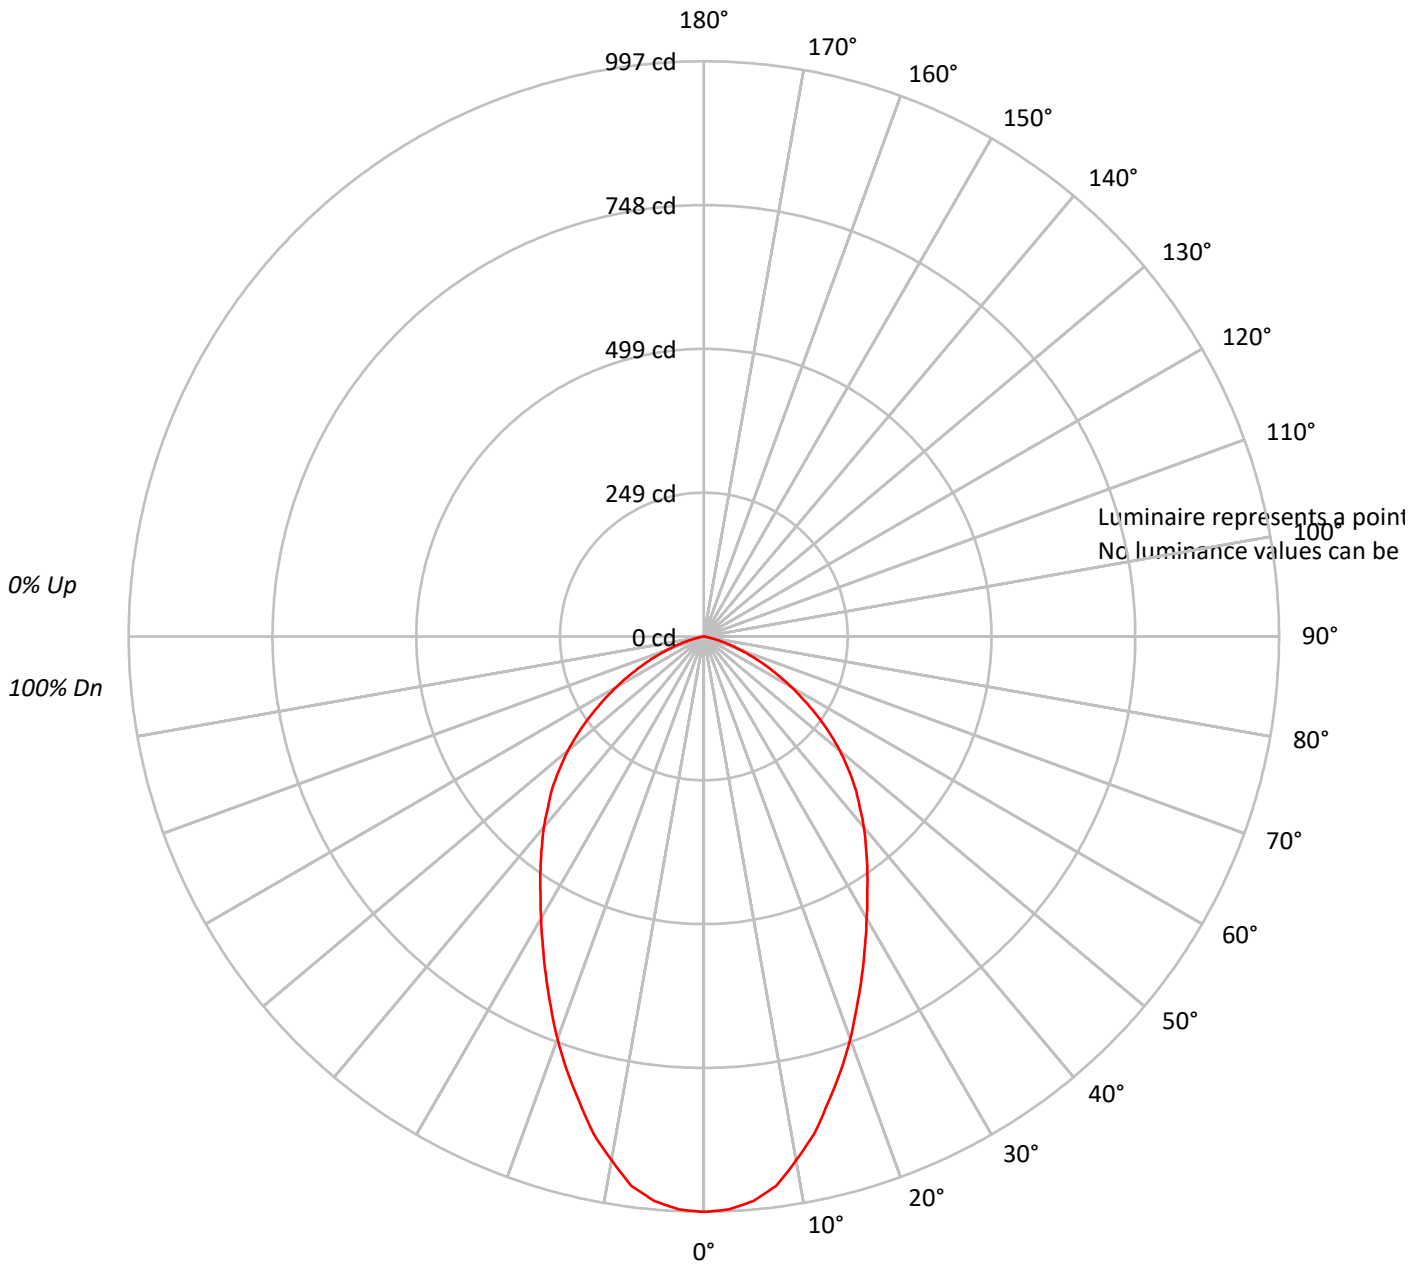



TEST NUMBER: P205381

CATALOG NUMBER: LSR6B15D010BZ EC6B10208030 6LBSLI1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									20
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0										
RCR	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100	100	100	100	100	100										
	1	111	107	104	101	109	105	102	99	101	99	96	97	95	93	94	92	91	89	89	89	89	89	89	89	89	89										
	2	103	96	91	86	100	94	89	85	91	87	83	88	84	81	85	82	79	77	77	77	77	77	77	77	77	77										
	3	95	86	79	74	93	85	78	73	82	76	72	79	75	71	77	73	70	68	68	68	68	68	68	68	68	68										
	4	88	78	70	64	86	77	69	64	74	68	63	72	67	62	70	65	62	60	60	60	60	60	60	60	60	60										
	5	82	71	63	57	80	70	62	57	67	61	56	66	60	55	64	59	55	53	53	53	53	53	53	53	53	53										
	6	76	64	56	51	74	63	56	51	62	55	50	60	54	50	59	53	49	47	47	47	47	47	47	47	47	47										
	7	71	59	51	46	70	58	51	45	57	50	45	55	49	45	54	49	45	43	43	43	43	43	43	43	43	43										
	8	67	54	47	41	65	54	46	41	52	46	41	51	45	41	50	45	41	39	39	39	39	39	39	39	39	39										
	9	63	50	43	38	61	50	43	38	49	42	38	48	42	37	47	41	37	36	36	36	36	36	36	36	36	36										
	10	59	47	40	35	58	46	39	35	45	39	35	45	39	34	44	38	34	33	33	33	33	33	33	33	33	33										

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P205381

CATALOG NUMBER: LSR6B15D010BZ EC6B10208030 6LBSLI1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	91.9	5.8
10°-20°	234.0	14.8
20°-30°	298.4	18.9
30°-40°	309.4	19.6
40°-50°	285.1	18.0
50°-60°	214.5	13.6
60°-70°	115.8	7.3
70°-80°	31.1	2.0
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	624.3	39.5
0°-40°	933.7	59.1
0°-60°	1433.3	90.7
0°-90°	1580.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1580.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	997	
5°	982	92
15°	834	234
25°	648	298
35°	494	309
45°	371	285
55°	240	214
65°	116	116
75°	27	31
85°	0	0
90°	0	



TEST NUMBER: P205381

CATALOG NUMBER: LSR6B15D010BZ EC6B10208030 6LBSLI1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	997.4
2.5°	994.0
5°	982.3
7.5°	960.5
10°	921.8
12.5°	883.2
15°	834.5
17.5°	789.2
20°	742.2
22.5°	693.5
25°	648.1
27.5°	604.5
30°	564.2
32.5°	527.2
35°	493.7
37.5°	461.8
40°	431.5
42.5°	399.6
45°	371.1
47.5°	339.2
50°	307.3
52.5°	273.7
55°	240.1
57.5°	206.5
60°	174.6
62.5°	144.4
65°	115.9
67.5°	89.0
70°	65.5
72.5°	45.3
75°	26.9
77.5°	11.8
80°	3.4
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)