

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P204776

Luminaire Tested: **LSR6B15D010BZ EC6B10209030 6LBCSMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204776
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR6B15D010BZ EC6B10209030 6LBCSMW1
Description: PORTFOLIO 6IN CYLINDER
SHALLOW DISTRIBUTION WITH CAST MATTE WHITE TRIM
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W
DL3-15.28 W DLE-15.432 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1375.7 lumens
Efficiency: N/A
Efficacy: 96.2 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204776

CATALOG NUMBER: LSR6B15D010BZ EC6B10209030 6LBCSMW1

Luminous Intensity Polar Plot

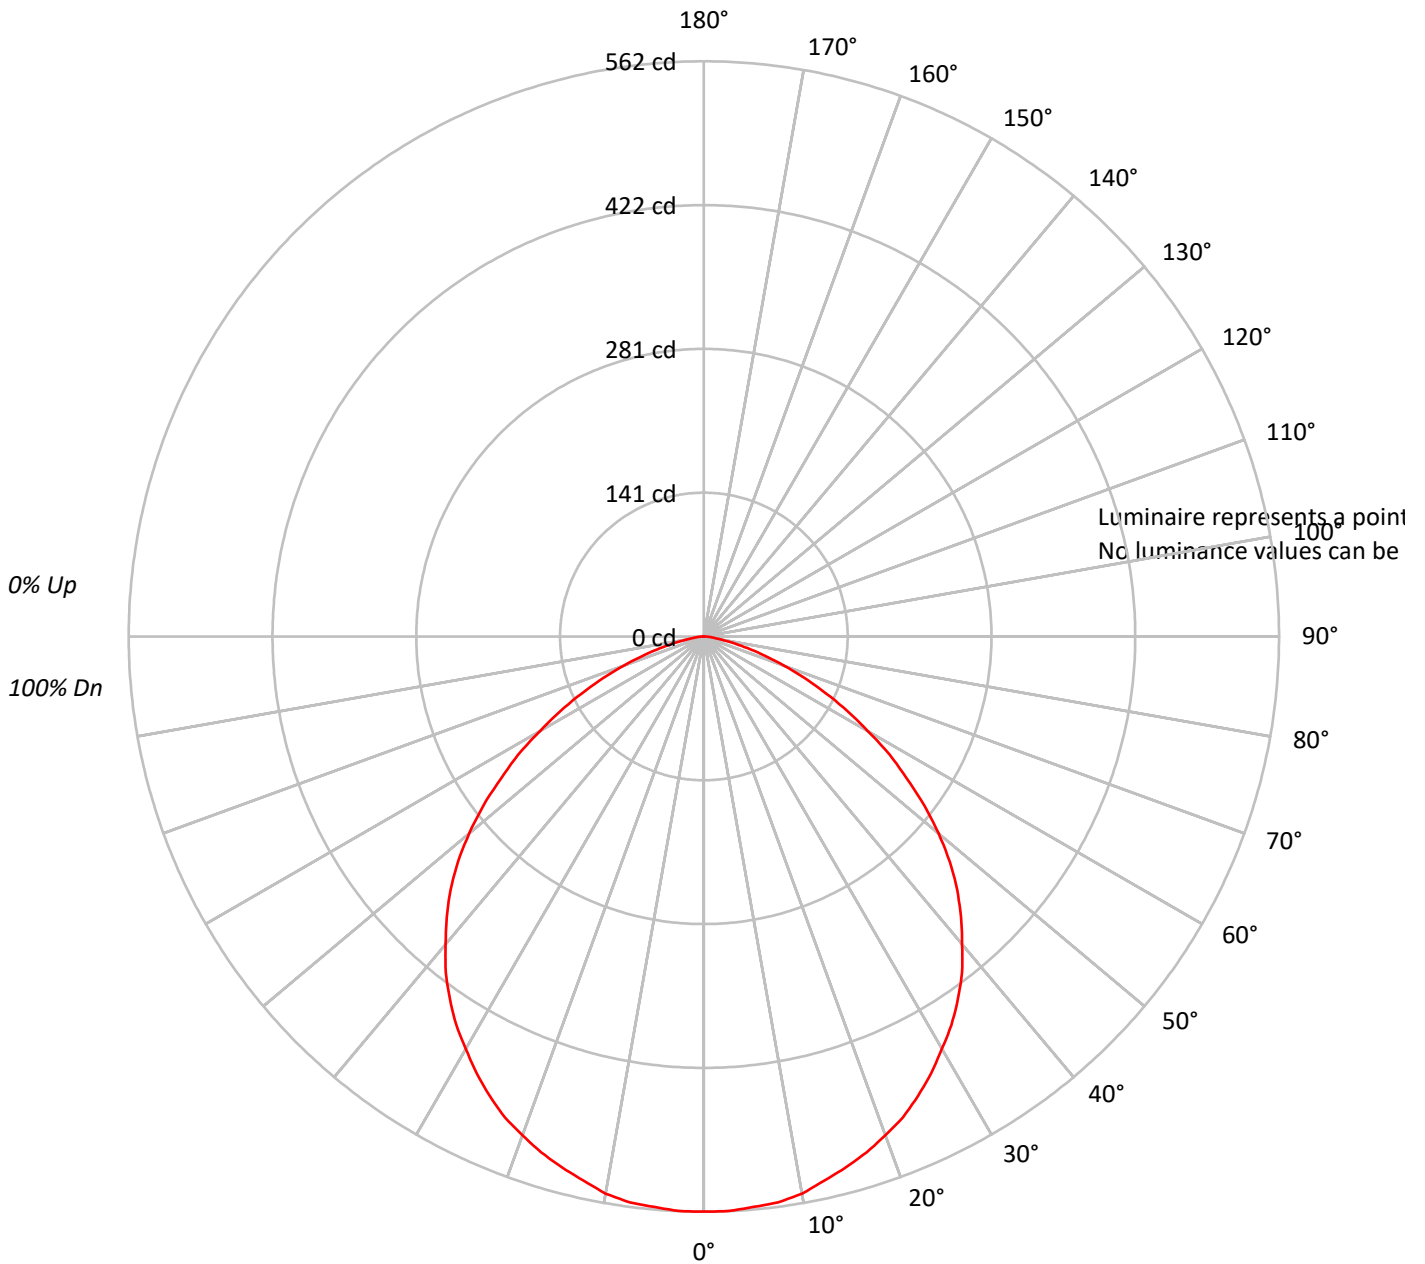



TEST NUMBER: P204776

CATALOG NUMBER: LSR6B15D010BZ EC6B10209030 6LBCSMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	110	106	102	99	108	104	100	97	100	97	94	96	93	91	92	90	89	87	87	87	87
2	101	94	87	82	99	92	86	81	88	84	79	85	81	78	82	79	76	74	74	74	74
3	93	83	75	70	90	81	74	69	79	73	68	76	71	67	73	69	65	63	63	63	63
4	85	74	66	60	83	73	65	59	70	64	58	68	62	58	66	61	57	55	55	55	55
5	79	66	58	52	77	65	57	51	63	56	51	61	55	50	60	54	50	48	48	48	48
6	73	60	52	45	71	59	51	45	57	50	45	56	49	44	54	49	44	42	42	42	42
7	68	55	46	40	66	54	46	40	52	45	40	51	44	40	50	44	39	37	37	37	37
8	63	50	42	36	61	49	41	36	48	41	36	47	40	36	46	40	35	33	33	33	33
9	59	46	38	33	57	45	38	32	44	37	32	43	37	32	42	36	32	30	30	30	30
10	55	42	35	30	54	42	34	30	41	34	29	40	34	29	39	33	29	27	27	27	27

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204776

CATALOG NUMBER: LSR6B15D010BZ EC6B10209030 6LBCSMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	53.2	3.9
10°-20°	151.6	11.0
20°-30°	228.0	16.6
30°-40°	270.2	19.6
40°-50°	268.9	19.5
50°-60°	216.8	15.8
60°-70°	131.1	9.5
70°-80°	48.7	3.5
80°-90°	7.2	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	432.8	31.5
0°-40°	703.0	51.1
0°-60°	1188.7	86.4
0°-90°	1375.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1375.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	562	
5°	559	53
15°	537	152
25°	495	228
35°	433	270
45°	350	269
55°	242	217
65°	132	131
75°	44	49
85°	6	7
90°	0	



TEST NUMBER: P204776

CATALOG NUMBER: LSR6B15D010BZ EC6B10209030 6LBCSMW1

CANDELA DISTRIBUTION (FULL):

0°	
0°	561.9
2.5°	561.9
5°	559.4
7.5°	557.7
10°	552.7
12.5°	544.4
15°	536.9
17.5°	528.5
20°	518.5
22.5°	508.5
25°	495.2
27.5°	481.0
30°	465.2
32.5°	450.2
35°	432.7
37.5°	414.3
40°	392.6
42.5°	371.8
45°	350.1
47.5°	326.0
50°	299.3
52.5°	271.8
55°	241.8
57.5°	215.1
60°	185.1
62.5°	158.4
65°	131.7
67.5°	106.7
70°	83.4
72.5°	62.5
75°	44.2
77.5°	28.3
80°	16.7
82.5°	10.0
85°	5.8
87.5°	2.5
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)