

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P203234

Luminaire Tested: **LSR6B15D010BZ EC6B10209730 6LBMH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P203234  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR6B15D010BZ EC6B10209730 6LBMH1  
Description: PORTFOLIO 6IN CYLINDER  
MEDIUM DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM  
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W  
DL3-15.28 W DLE-15.432 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 799.8 lumens  
Efficiency: N/A  
Efficacy: 55.9 lumens/watt  
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.93  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P203234

CATALOG NUMBER: LSR6B15D010BZ EC6B10209730 6LBMH1

### Luminous Intensity Polar Plot

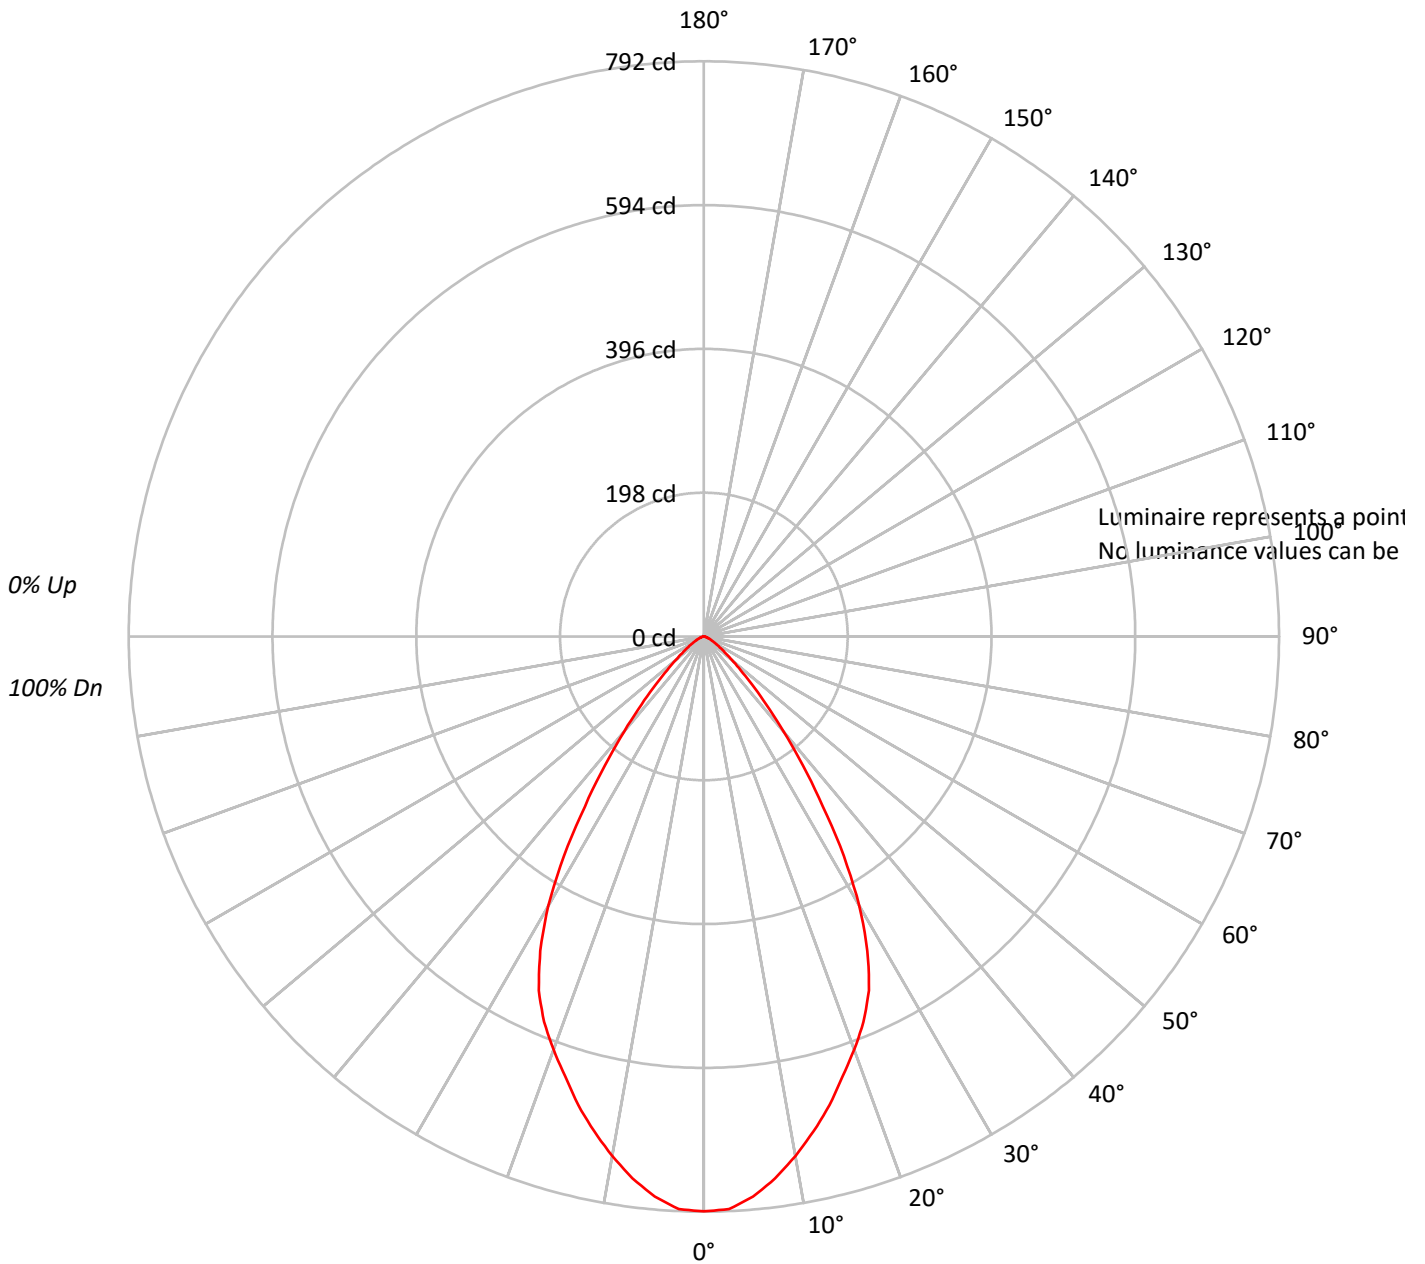



TEST NUMBER: P203234

CATALOG NUMBER: LSR6B15D010BZ EC6B10209730 6LBMH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	92																			
2	107	102	97	93	105	100	96	92	97	93	90	94	91	88	91	89	87	85																			
3	101	94	88	84	99	92	87	84	90	86	82	87	84	81	85	82	80	78																			
4	95	87	81	76	93	86	80	76	84	79	75	82	78	74	80	76	73	72																			
5	90	81	75	70	88	80	74	70	78	73	69	76	72	68	75	71	68	66																			
6	85	75	69	64	83	75	69	64	73	68	64	72	67	63	70	66	63	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	76	66	60	55	75	65	59	55	64	59	55	63	58	55	62	58	54	53																			
9	72	62	56	51	71	61	55	51	60	55	51	60	55	51	59	54	51	49																			
10	69	58	52	48	68	58	52	48	57	52	48	56	51	48	55	51	48	46																			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P203234

CATALOG NUMBER: LSR6B15D010BZ EC6B10209730 6LBMH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	72.4	9.0
10°-20°	187.2	23.4
20°-30°	242.6	30.3
30°-40°	180.1	22.5
40°-50°	76.0	9.5
50°-60°	27.0	3.4
60°-70°	10.4	1.3
70°-80°	3.6	0.5
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	502.2	62.8
0°-40°	682.2	85.3
0°-60°	785.3	98.2
0°-90°	799.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	799.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	792	
5°	774	72
15°	668	187
25°	538	243
35°	286	180
45°	94	76
55°	29	27
65°	10	10
75°	3	4
85°	0	0
90°	0	



TEST NUMBER: P203234

CATALOG NUMBER: LSR6B15D010BZ EC6B10209730 6LBMH1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	791.5
2.5°	789.2
5°	774.3
7.5°	752.6
10°	726.4
12.5°	697.8
15°	668.1
17.5°	635.0
20°	605.3
22.5°	574.5
25°	537.9
27.5°	487.7
30°	428.3
32.5°	358.6
35°	285.5
37.5°	223.8
40°	170.2
42.5°	126.8
45°	93.7
47.5°	68.5
50°	50.3
52.5°	37.7
55°	28.6
57.5°	21.7
60°	17.1
62.5°	12.6
65°	10.3
67.5°	8.0
70°	5.7
72.5°	4.6
75°	3.4
77.5°	2.3
80°	1.1
82.5°	1.1
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)