

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P204368

Luminaire Tested: **LSR6B20D010BZ EC6B10208027 6LBSGPH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204368
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR6B20D010BZ EC6B10208027 6LBSGPH1
Description: PORTFOLIO 6IN CYLINDER
SHALLOW DISTRIBUTION WITH GRAPHITE HAZE TRIM
WATTAGE D010TR-21.86 W DE010-20.46 W D5LT-21.24 W DMX-20.89 W DL2-22.5 W
DL3-21.8 6 W DLE-22.46 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1863.2 lumens
Efficiency: N/A
Efficacy: 89.6 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.26
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 20.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204368

CATALOG NUMBER: LSR6B20D010BZ EC6B10208027 6LBSGPH1

Luminous Intensity Polar Plot

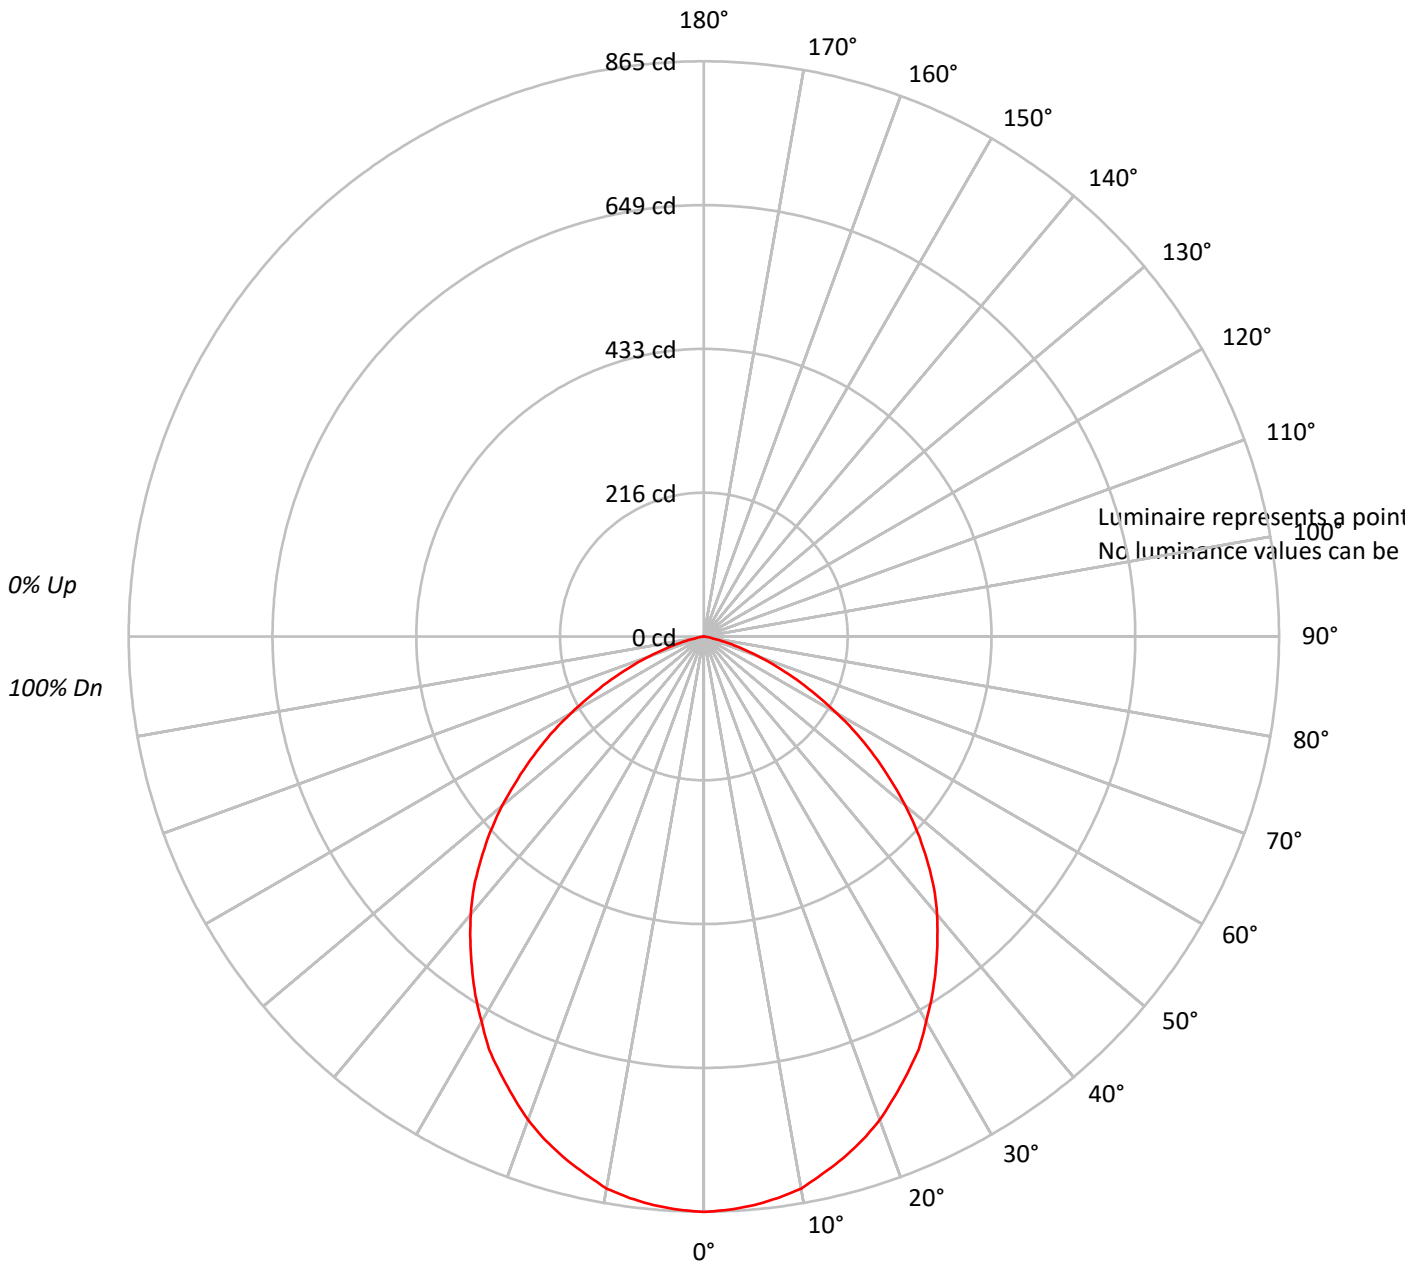



TEST NUMBER: P204368

CATALOG NUMBER: LSR6B20D010BZ EC6B10208027 6LBSGPH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	111	107	103	100	108	105	102	99	101	98	96	97	95	93	93	91	90	88			88
2	102	95	89	84	100	93	88	83	90	85	82	87	83	80	84	81	78	76			76
3	94	85	78	72	92	83	77	71	80	75	70	78	73	69	75	71	68	66			66
4	87	76	68	62	85	75	67	62	72	66	61	70	65	60	68	63	59	57			57
5	80	68	60	54	78	67	60	54	65	59	53	63	58	53	62	56	52	50			50
6	74	62	54	48	73	61	53	48	59	52	47	58	52	47	56	51	47	45			45
7	69	57	48	43	68	56	48	43	54	47	42	53	47	42	52	46	42	40			40
8	65	52	44	38	63	51	44	38	50	43	38	49	42	38	48	42	38	36			36
9	60	48	40	35	59	47	40	35	46	39	35	45	39	34	44	38	34	32			32
10	57	44	37	32	56	44	36	32	43	36	31	42	36	31	41	35	31	30			30

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204368

CATALOG NUMBER: LSR6B20D010BZ EC6B10208027 6LBSGPH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	81.5	4.4
10°-20°	228.7	12.3
20°-30°	333.6	17.9
30°-40°	380.4	20.4
40°-50°	364.9	19.6
50°-60°	279.4	15.0
60°-70°	153.4	8.2
70°-80°	40.8	2.2
80°-90°	0.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	643.7	34.6
0°-40°	1024.1	55.0
0°-60°	1668.4	89.5
0°-90°	1863.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1863.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	865	
5°	859	81
15°	812	229
25°	724	334
35°	608	380
45°	474	365
55°	313	279
65°	154	153
75°	36	41
85°	0	1
90°	0	



TEST NUMBER: P204368

CATALOG NUMBER: LSR6B20D010BZ EC6B10208027 6LBSGPH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	865.4
2.5°	863.1
5°	858.6
7.5°	851.9
10°	843.0
12.5°	827.3
15°	811.7
17.5°	793.8
20°	773.7
22.5°	749.1
25°	724.5
27.5°	699.9
30°	668.6
32.5°	639.5
35°	608.2
37.5°	576.9
40°	545.6
42.5°	512.1
45°	474.0
47.5°	436.0
50°	395.8
52.5°	353.3
55°	313.0
57.5°	272.8
60°	230.3
62.5°	190.1
65°	154.3
67.5°	118.5
70°	87.2
72.5°	58.1
75°	35.8
77.5°	15.7
80°	4.5
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)