

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P204793

Luminaire Tested: **LSR6B20D010BZ EC6B10209727 6LBCSMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204793
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR6B20D010BZ EC6B10209727 6LBCSMW1
Description: PORTFOLIO 6IN CYLINDER
SHALLOW DISTRIBUTION WITH CAST MATTE WHITE TRIM
WATTAGE D010TR-21.86 W DE010-20.46 W D5LT-21.24 W DMX-20.89 W DL2-22.5 W
DL3-21.8 6 W DLE-22.46 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1598.8 lumens
Efficiency: N/A
Efficacy: 76.9 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 20.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204793

CATALOG NUMBER: LSR6B20D010BZ EC6B10209727 6LBCSMW1

Luminous Intensity Polar Plot

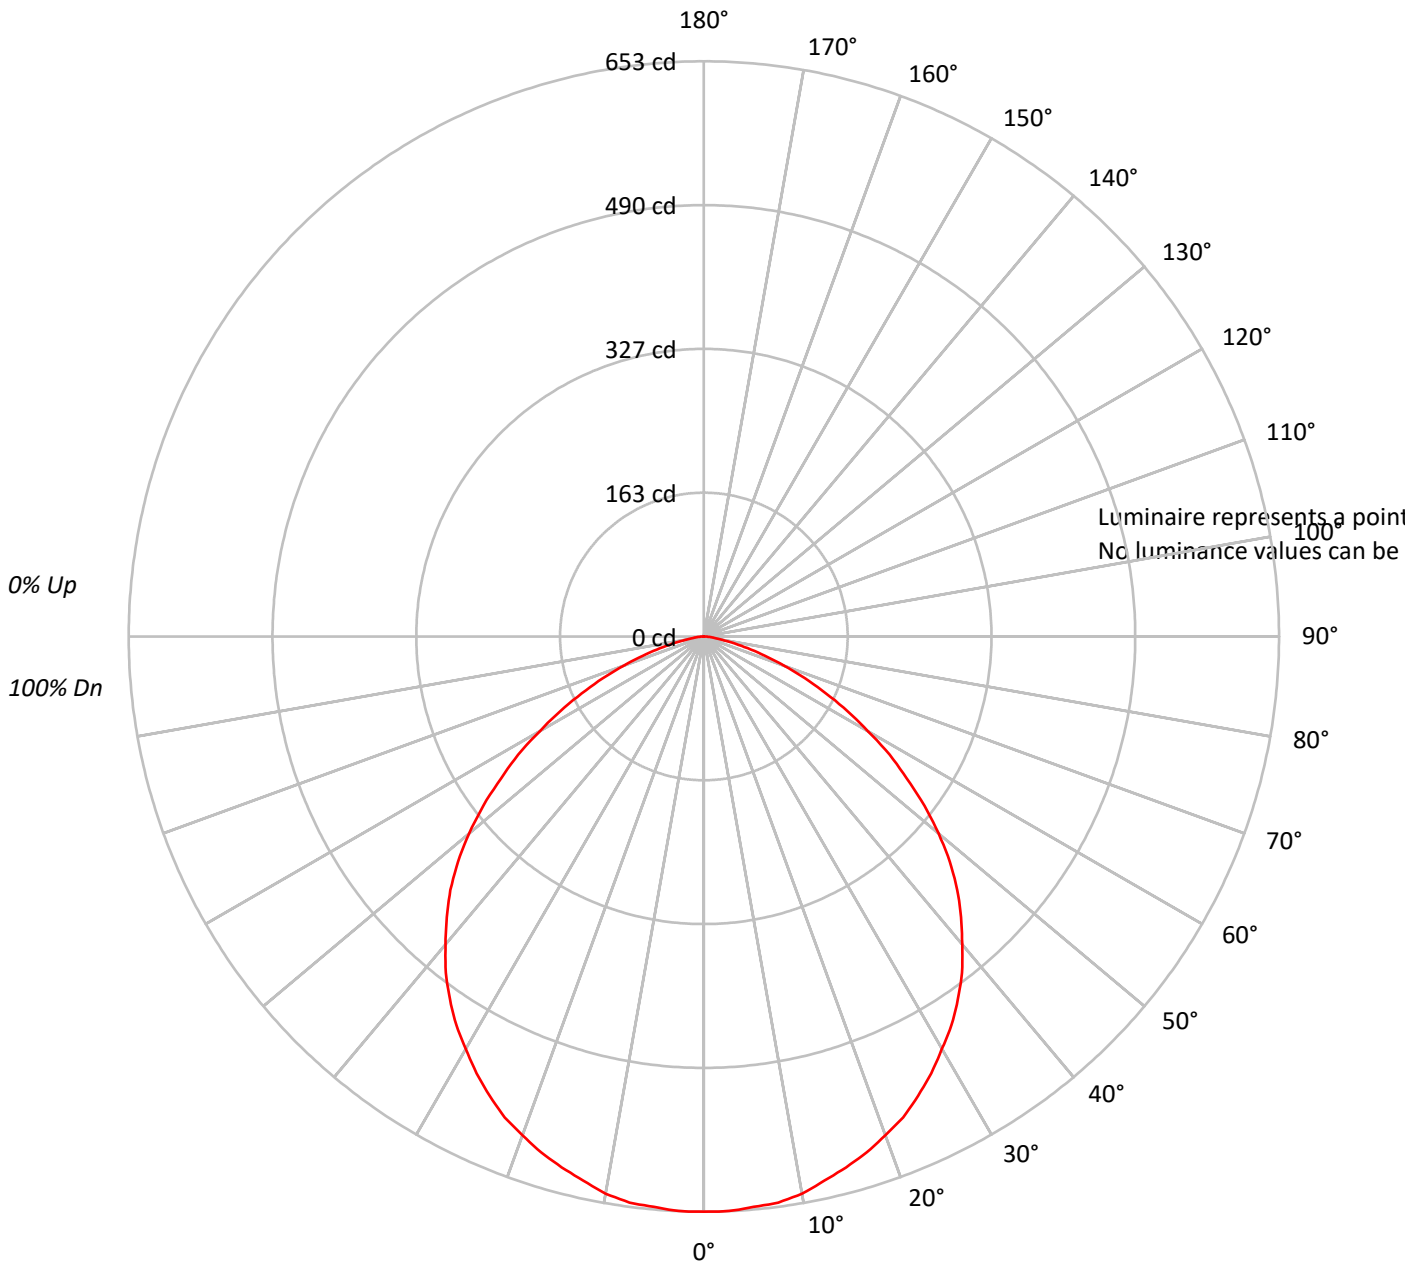



TEST NUMBER: P204793

CATALOG NUMBER: LSR6B20D010BZ EC6B10209727 6LBCSMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	110	106	102	99	108	104	100	97	100	97	94	96	93	91	92	90	89	87			87
2	101	94	87	82	99	92	86	81	88	84	79	85	81	78	82	79	76	74			74
3	93	83	75	70	90	81	74	69	79	73	68	76	71	67	73	69	65	63			63
4	85	74	66	60	83	73	65	59	70	64	58	68	62	58	66	61	57	55			55
5	79	66	58	52	77	65	57	51	63	56	51	61	55	50	60	54	50	48			48
6	73	60	52	45	71	59	51	45	57	50	45	56	49	44	54	49	44	42			42
7	68	55	46	40	66	54	46	40	52	45	40	51	44	40	50	44	39	37			37
8	63	50	42	36	61	49	41	36	48	41	36	47	40	36	46	40	35	33			33
9	59	46	38	33	57	45	38	32	44	37	32	43	37	32	42	36	32	30			30
10	55	42	35	30	54	42	34	30	41	34	29	40	34	29	39	33	29	27			27

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204793

CATALOG NUMBER: LSR6B20D010BZ EC6B10209727 6LBCSMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	61.9	3.9
10°-20°	176.1	11.0
20°-30°	265.0	16.6
30°-40°	314.0	19.6
40°-50°	312.5	19.5
50°-60°	251.9	15.8
60°-70°	152.4	9.5
70°-80°	56.6	3.5
80°-90°	8.4	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	503.0	31.5
0°-40°	817.0	51.1
0°-60°	1381.4	86.4
0°-90°	1598.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1598.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	653	
5°	650	62
15°	624	176
25°	576	265
35°	503	314
45°	407	312
55°	281	252
65°	153	152
75°	51	57
85°	7	8
90°	0	



TEST NUMBER: P204793

CATALOG NUMBER: LSR6B20D010BZ EC6B10209727 6LBCSMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	653.0
2.5°	653.0
5°	650.1
7.5°	648.2
10°	642.3
12.5°	632.7
15°	623.9
17.5°	614.2
20°	602.6
22.5°	591.0
25°	575.5
27.5°	559.0
30°	540.6
32.5°	523.2
35°	502.8
37.5°	481.5
40°	456.3
42.5°	432.1
45°	406.9
47.5°	378.8
50°	347.8
52.5°	315.8
55°	281.0
57.5°	250.0
60°	215.1
62.5°	184.1
65°	153.1
67.5°	124.0
70°	96.9
72.5°	72.7
75°	51.3
77.5°	32.9
80°	19.4
82.5°	11.6
85°	6.8
87.5°	2.9
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)