

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P205100

Luminaire Tested: **LSR6B20D010BZ EC6B10209727 6LBMLI1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P205100
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR6B20D010BZ EC6B10209727 6LBMLI1
Description: PORTFOLIO 6IN CYLINDER
MEDIUM DISTRIBUTION WITH SPECULAR CLEAR TRIM
WATTAGE D010TR-21.86 W DE010-20.46 W D5LT-21.24 W DMX-20.89 W DL2-22.5 W
DL3-21.8 6 W DLE-22.46 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1302.5 lumens
Efficiency: N/A
Efficacy: 62.6 lumens/watt
Spacing Criteria (0/90/45): 0.85 / 0.85 / 0.85
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 20.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P205100

CATALOG NUMBER: LSR6B20D010BZ EC6B10209727 6LBMLI1

Luminous Intensity Polar Plot

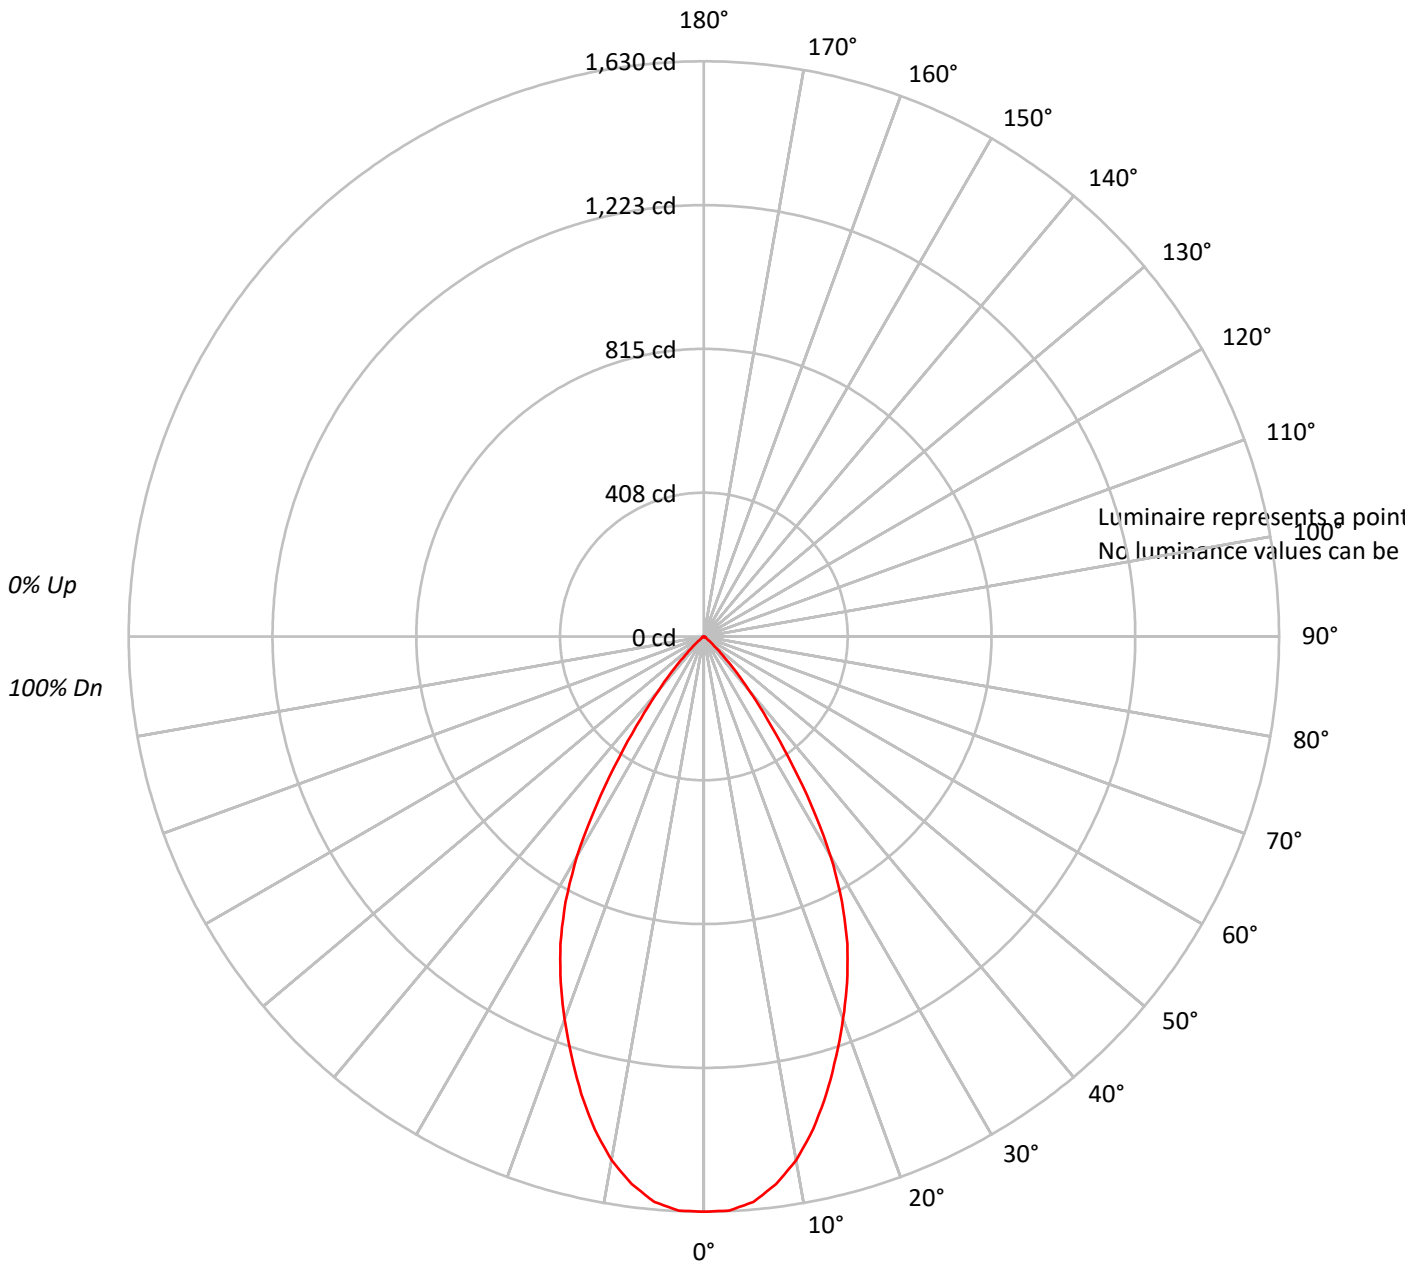



TEST NUMBER: P205100

CATALOG NUMBER: LSR6B20D010BZ EC6B10209727 6LBML11

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20																	
RC	80									70									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																								
RCR																																																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																																				
1	114	111	109	106	111	109	107	105	105	103	101	101	100	98	98	97	96	94																																				
2	108	103	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88																																				
3	103	97	92	88	101	95	91	87	93	89	86	90	87	85	88	85	83	82																																				
4	98	91	85	81	96	89	84	81	87	83	80	85	82	79	83	80	78	76																																				
5	93	85	79	75	91	84	79	75	82	78	74	81	77	73	79	76	73	71																																				
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67																																				
7	84	75	69	65	83	75	69	65	73	68	65	72	68	64	71	67	64	63																																				
8	80	71	65	61	79	70	65	61	69	64	61	68	64	60	67	63	60	59																																				
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55																																				
10	73	64	58	54	72	63	58	54	62	57	54	62	57	54	61	57	54	52																																				

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P205100

CATALOG NUMBER: LSR6B20D010BZ EC6B10209727 6LBML11

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	150.2	11.5
10°-20°	373.8	28.7
20°-30°	434.6	33.4
30°-40°	266.1	20.4
40°-50°	66.1	5.1
50°-60°	7.7	0.6
60°-70°	2.9	0.2
70°-80°	1.1	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	958.6	73.6
0°-40°	1224.7	94.0
0°-60°	1298.5	99.7
0°-90°	1302.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1302.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1630	
5°	1608	150
15°	1342	374
25°	962	435
35°	417	266
45°	73	66
55°	7	8
65°	3	3
75°	2	1
85°	0	0
90°	0	



TEST NUMBER: P205100

CATALOG NUMBER: LSR6B20D010BZ EC6B10209727 6LBMLI1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1630.0
2.5°	1628.4
5°	1608.4
7.5°	1565.0
10°	1506.7
12.5°	1430.0
15°	1341.7
17.5°	1246.7
20°	1153.3
22.5°	1060.0
25°	961.7
27.5°	848.3
30°	718.3
32.5°	566.7
35°	416.7
37.5°	293.3
40°	200.0
42.5°	125.0
45°	73.3
47.5°	41.7
50°	21.7
52.5°	10.0
55°	6.7
57.5°	5.0
60°	5.0
62.5°	3.3
65°	3.3
67.5°	1.7
70°	1.7
72.5°	1.7
75°	1.7
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)