

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P202937

Luminaire Tested: **LSR6B20D010BZ EC6B10209727 6LBWGPH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P202937
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR6B20D010BZ EC6B10209727 6LBWGPH1
Description: PORTFOLIO 6IN CYLINDER
WIDE DISTRIBUTIONWITH GRAPHITE HAZE TRIM
WATTAGE D010TR-21.86 W DE010-20.46 W D5LT-21.24 W DMX-20.89 W DL2-22.5 W
DL3-21.8 6 W DLE-22.46 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 968.9 lumens
Efficiency: N/A
Efficacy: 46.6 lumens/watt
Spacing Criteria (0/90/45): 1.11 / 1.11 / 1.11
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 20.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P202937

CATALOG NUMBER: LSR6B20D010BZ EC6B10209727 6LBWGPH1

Luminous Intensity Polar Plot

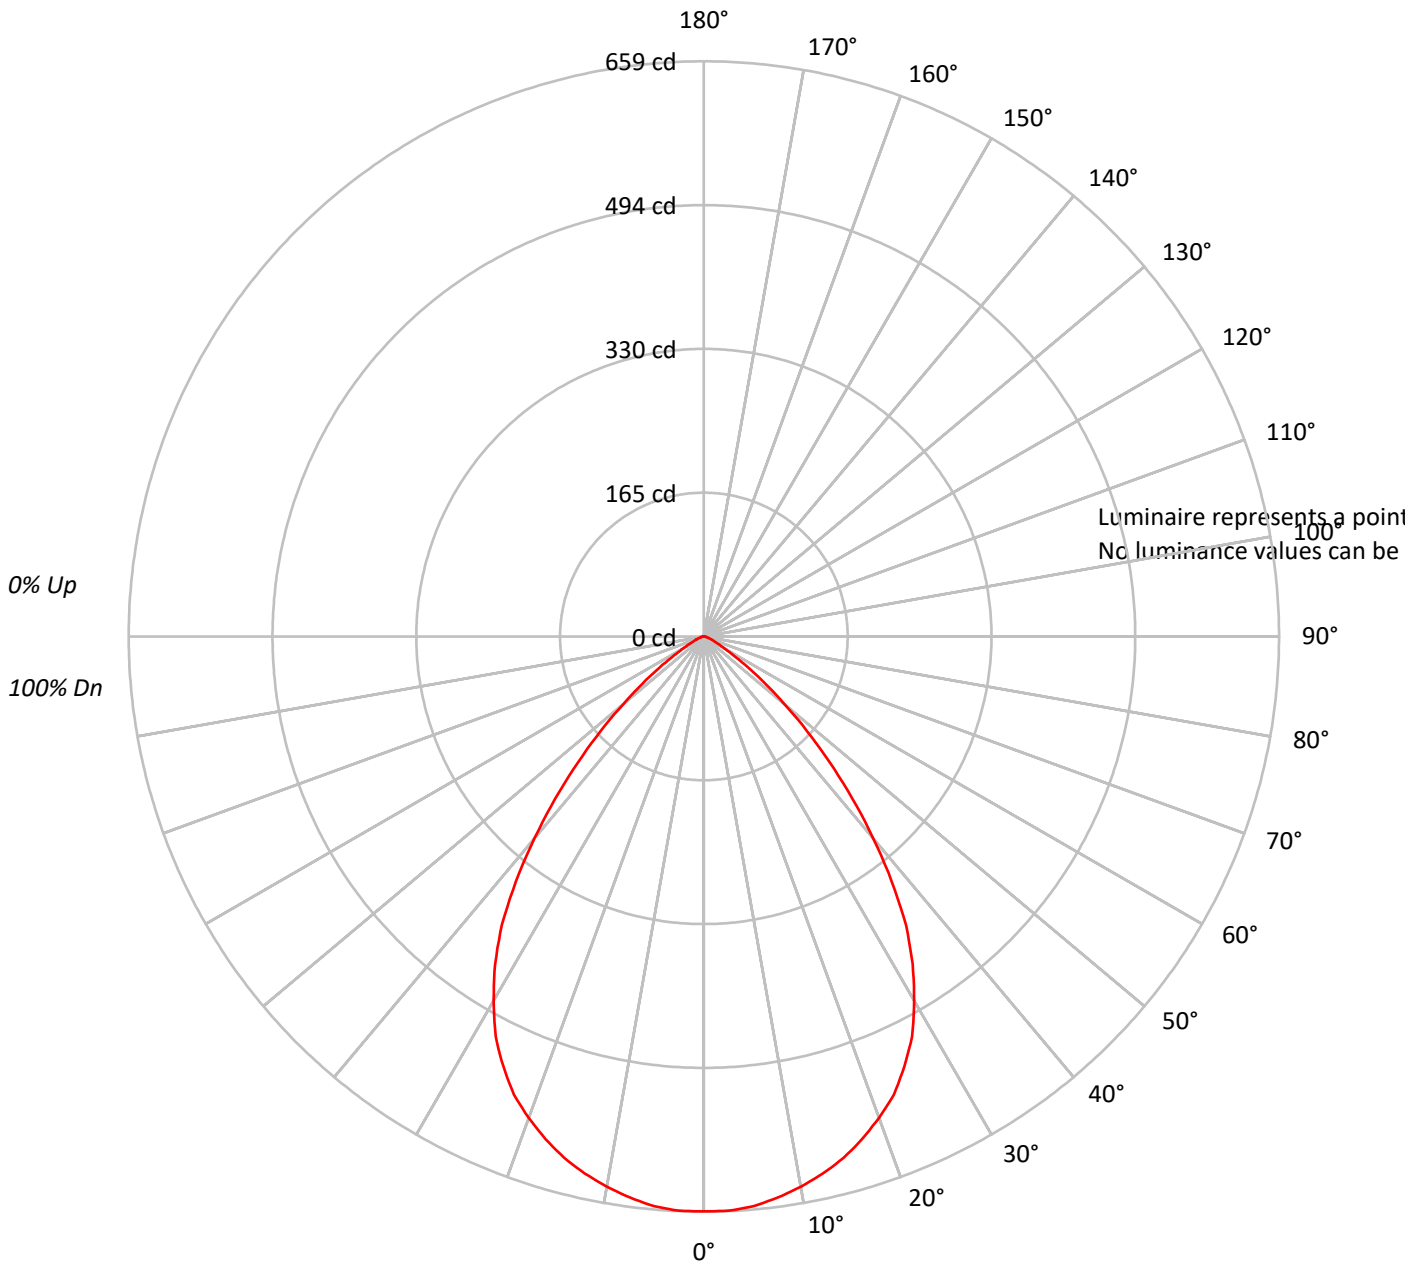



TEST NUMBER: P202937

CATALOG NUMBER: LSR6B20D010BZ EC6B10209727 6LBWGPH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	86	84	82																			
3	99	91	85	81	97	90	84	80	87	82	79	85	81	77	82	79	76	74																			
4	93	84	77	72	91	82	76	72	80	75	71	78	74	70	76	72	69	67																			
5	87	77	70	65	85	76	69	65	74	68	64	72	67	63	71	66	63	61																			
6	81	71	64	59	80	70	63	59	68	62	58	67	62	58	65	61	57	56																			
7	76	65	58	53	75	65	58	53	63	57	53	62	57	53	61	56	52	51																			
8	72	61	54	49	70	60	53	49	59	53	49	58	52	48	57	52	48	47																			
9	68	57	50	45	66	56	49	45	55	49	45	54	48	45	53	48	44	43																			
10	64	53	46	42	63	52	46	42	51	45	41	51	45	41	50	45	41	40																			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P202937

CATALOG NUMBER: LSR6B20D010BZ EC6B10209727 6LBWGPH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	62.0	6.4
10°-20°	174.0	18.0
20°-30°	248.9	25.7
30°-40°	248.1	25.6
40°-50°	158.0	16.3
50°-60°	58.3	6.0
60°-70°	14.6	1.5
70°-80°	4.4	0.5
80°-90°	0.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	484.9	50.0
0°-40°	733.0	75.7
0°-60°	949.3	98.0
0°-90°	968.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	968.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	659	
5°	655	62
15°	618	174
25°	544	249
35°	404	248
45°	203	158
55°	62	58
65°	13	15
75°	3	4
85°	0	1
90°	0	



TEST NUMBER: P202937

CATALOG NUMBER: LSR6B20D010BZ EC6B10209727 6LBWGPH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	658.6
2.5°	658.6
5°	655.2
7.5°	648.5
10°	640.2
12.5°	630.2
15°	618.5
17.5°	603.5
20°	586.9
22.5°	568.5
25°	543.5
27.5°	516.8
30°	481.8
32.5°	445.1
35°	403.5
37.5°	353.5
40°	301.8
42.5°	251.8
45°	203.4
47.5°	160.1
50°	120.0
52.5°	88.4
55°	61.7
57.5°	40.0
60°	26.7
62.5°	18.3
65°	13.3
67.5°	10.0
70°	8.3
72.5°	5.0
75°	3.3
77.5°	3.3
80°	1.7
82.5°	1.7
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)