

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P205298

Luminaire Tested: **LSR6B20D010BZ EC6B10209030 6LBNI1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P205298  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR6B20D010BZ EC6B10209030 6LBNLI1  
Description: PORTFOLIO 6IN CYLINDER  
NARROW DISTRIBUTION WITH SPECULAR CLEAR TRIM  
WATTAGE D010TR-21.86 W DE010-20.46 W D5LT-21.24 W DMX-20.89 W DL2-22.5 W  
DL3-21.8 6 W DLE-22.46 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1384.2 lumens  
Efficiency: N/A  
Efficacy: 66.5 lumens/watt  
Spacing Criteria (0/90/45): 0.53 / 0.53 / 0.58  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 20.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P205298

CATALOG NUMBER: LSR6B20D010BZ EC6B10209030 6LBNLI1

### Luminous Intensity Polar Plot

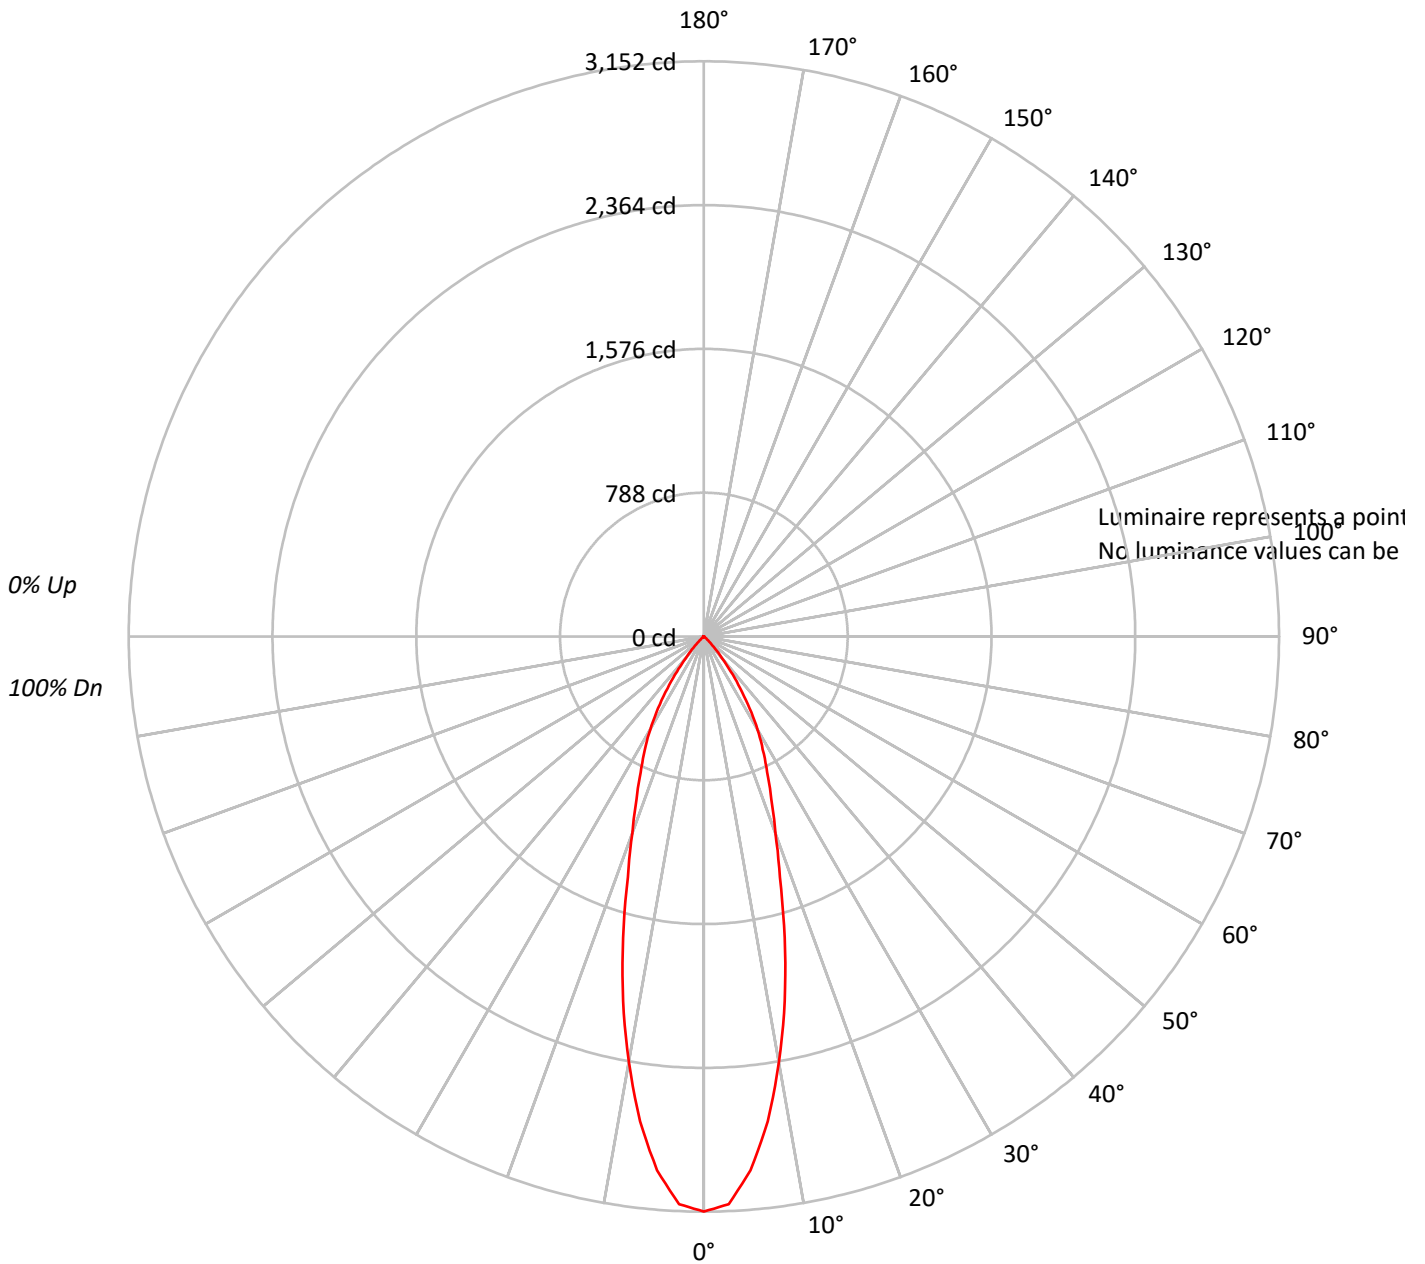



TEST NUMBER: P205298

CATALOG NUMBER: LSR6B20D010BZ EC6B10209030 6LBNLI1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|--|--|--|--|--|--|----|--|--|--|--|--|--|--|--|---|
| RF  | 20  |     |     |     |     |     |     |     |     | 20  |     |     |     |     |     |     |     |     | 20 |    |   |  |  |  |  |  |  | 20 |  |  |  |  |  |  |  |  |   |
| RC  | 80  |     |     |     |     |     |     |     |     | 50  |     |     |     |     |     |     |     |     | 30 |    |   |  |  |  |  |  |  | 10 |  |  |  |  |  |  |  |  | 0 |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0 |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 1   | 114 | 112 | 109 | 107 | 112 | 109 | 107 | 106 | 105 | 104 | 102 | 102 | 101 | 99  | 98  | 97  | 96  | 95  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 2   | 109 | 105 | 101 | 98  | 107 | 103 | 100 | 97  | 100 | 97  | 95  | 97  | 95  | 93  | 94  | 93  | 91  | 89  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 3   | 105 | 99  | 94  | 91  | 103 | 97  | 93  | 90  | 95  | 91  | 89  | 93  | 90  | 87  | 90  | 88  | 86  | 85  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 4   | 100 | 93  | 88  | 85  | 98  | 92  | 88  | 84  | 90  | 86  | 83  | 88  | 85  | 82  | 86  | 84  | 81  | 80  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 5   | 96  | 88  | 83  | 79  | 94  | 87  | 83  | 79  | 86  | 82  | 78  | 84  | 81  | 78  | 83  | 80  | 77  | 76  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 6   | 92  | 84  | 79  | 75  | 90  | 83  | 78  | 75  | 82  | 77  | 74  | 80  | 76  | 74  | 79  | 76  | 73  | 72  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 7   | 88  | 80  | 74  | 71  | 87  | 79  | 74  | 71  | 78  | 73  | 70  | 77  | 73  | 70  | 76  | 72  | 69  | 68  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 8   | 84  | 76  | 71  | 67  | 83  | 75  | 70  | 67  | 74  | 70  | 67  | 73  | 69  | 66  | 73  | 69  | 66  | 65  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 9   | 81  | 73  | 67  | 64  | 80  | 72  | 67  | 64  | 71  | 67  | 63  | 70  | 66  | 63  | 70  | 66  | 63  | 62  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 10  | 78  | 69  | 64  | 61  | 77  | 69  | 64  | 61  | 68  | 64  | 61  | 67  | 63  | 60  | 67  | 63  | 60  | 59  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P205298

CATALOG NUMBER: LSR6B20D010BZ EC6B10209030 6LBNLI1

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 262.0  | 18.9      |
| 10°-20°   | 470.3  | 34.0      |
| 20°-30°   | 380.3  | 27.5      |
| 30°-40°   | 219.1  | 15.8      |
| 40°-50°   | 46.3   | 3.3       |
| 50°-60°   | 4.0    | 0.3       |
| 60°-70°   | 2.0    | 0.1       |
| 70°-80°   | 0.3    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 1112.6 | 80.4      |
| 0°-40°    | 1331.6 | 96.2      |
| 0°-60°    | 1382.0 | 99.8      |
| 0°-90°    | 1384.2 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1384.2 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 3152 |      |
| 5°  | 2936 | 262  |
| 15° | 1708 | 470  |
| 25° | 820  | 380  |
| 35° | 347  | 219  |
| 45° | 50   | 46   |
| 55° | 4    | 4    |
| 65° | 2    | 2    |
| 75° | 0    | 0    |
| 85° | 0    | 0    |
| 90° | 0    |      |



TEST NUMBER: P205298

CATALOG NUMBER: LSR6B20D010BZ EC6B10209030 6LBNLI1

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 3151.5 |
| 2.5°  | 3113.6 |
| 5°    | 2935.9 |
| 7.5°  | 2680.4 |
| 10°   | 2367.1 |
| 12.5° | 2045.8 |
| 15°   | 1708.5 |
| 17.5° | 1383.1 |
| 20°   | 1145.6 |
| 22.5° | 964.0  |
| 25°   | 820.3  |
| 27.5° | 698.6  |
| 30°   | 588.8  |
| 32.5° | 467.0  |
| 35°   | 347.3  |
| 37.5° | 241.5  |
| 40°   | 157.7  |
| 42.5° | 95.8   |
| 45°   | 49.9   |
| 47.5° | 20.0   |
| 50°   | 6.0    |
| 52.5° | 6.0    |
| 55°   | 4.0    |
| 57.5° | 4.0    |
| 60°   | 2.0    |
| 62.5° | 2.0    |
| 65°   | 2.0    |
| 67.5° | 2.0    |
| 70°   | 2.0    |
| 72.5° | 0.0    |
| 75°   | 0.0    |
| 77.5° | 0.0    |
| 80°   | 0.0    |
| 82.5° | 0.0    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)