

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P203135

Luminaire Tested: **LSR6B20D010BZ EC6B10208040 6LBWMW1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P203135  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR6B20D010BZ EC6B10208040 6LBWMW1  
Description: PORTFOLIO 6IN CYLINDER  
WIDE DISTRIBUTION WITH MATTE WHITE TRIM  
WATTAGE D010TR-21.86 W DE010-20.46 W D5LT-21.24 W DMX-20.89 W DL2-22.5 W  
DL3-21.8 6 W DLE-22.46 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1995.3 lumens  
Efficiency: N/A  
Efficacy: 95.9 lumens/watt  
Spacing Criteria (0/90/45): 1.13 / 1.13 / 1.15  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 20.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P203135

CATALOG NUMBER: LSR6B20D010BZ EC6B10208040 6LBWMW1

### Luminous Intensity Polar Plot

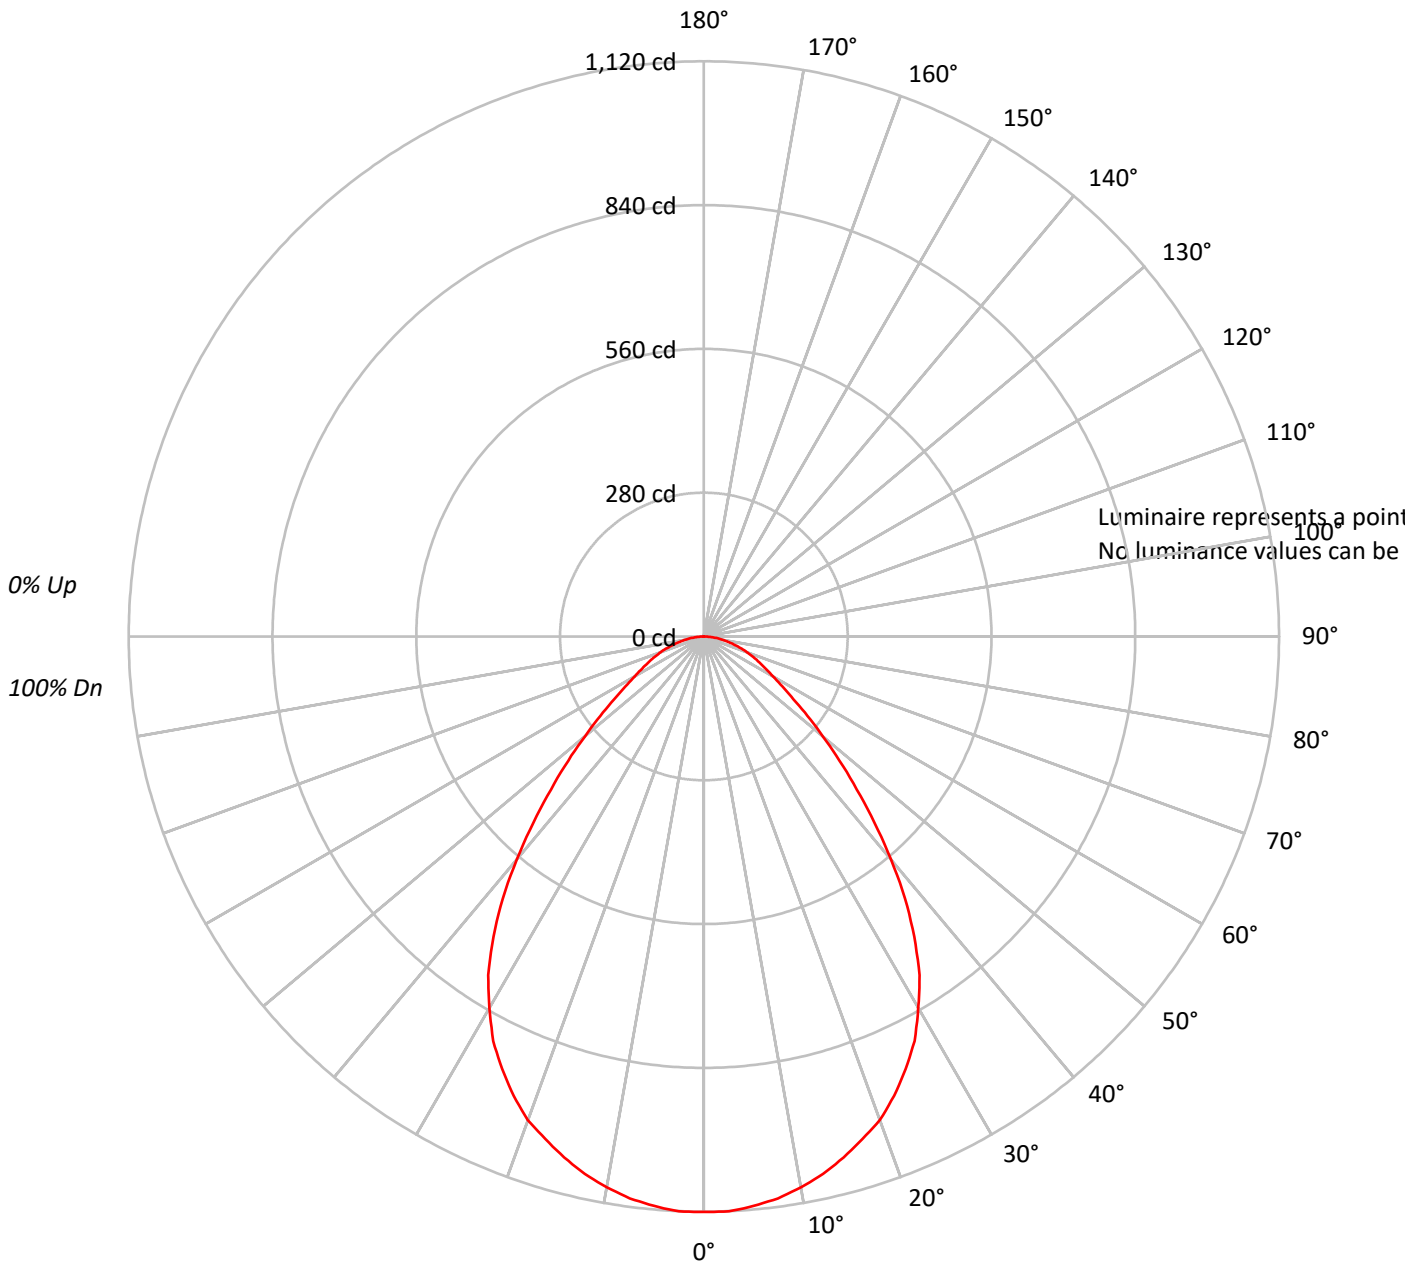



TEST NUMBER: P203135

CATALOG NUMBER: LSR6B20D010BZ EC6B10208040 6LBWMW1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	111	107	104	100	108	105	102	99	101	98	96	97	95	93	93	92	90	88		
2	103	96	90	86	100	94	89	85	91	86	83	88	84	81	85	82	79	77		
3	95	86	80	74	93	85	79	74	82	77	72	80	75	71	77	73	70	68		
4	89	78	71	65	86	77	70	65	75	69	64	72	67	63	70	66	62	60		
5	82	71	64	58	80	70	63	58	68	62	57	66	61	56	65	60	56	54		
6	77	65	57	52	75	64	57	52	63	56	51	61	55	51	60	54	50	49		
7	72	60	52	47	70	59	52	47	58	51	46	56	50	46	55	50	46	44		
8	67	55	48	42	66	55	47	42	53	47	42	52	46	42	51	46	42	40		
9	63	51	44	39	62	51	44	39	50	43	39	49	43	38	48	42	38	37		
10	60	48	40	36	58	47	40	36	46	40	36	45	40	35	45	39	35	34		

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P203135

CATALOG NUMBER: LSR6B20D010BZ EC6B10208040 6LBWMW1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	105.5	5.3
10°-20°	295.9	14.8
20°-30°	426.4	21.4
30°-40°	442.7	22.2
40°-50°	327.3	16.4
50°-60°	195.5	9.8
60°-70°	118.8	6.0
70°-80°	65.1	3.3
80°-90°	18.1	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	827.8	41.5
0°-40°	1270.5	63.7
0°-60°	1793.3	89.9
0°-90°	1995.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1995.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1120	
5°	1113	106
15°	1050	296
25°	929	426
35°	714	443
45°	421	327
55°	213	196
65°	119	119
75°	60	65
85°	14	18
90°	0	



TEST NUMBER: P203135

CATALOG NUMBER: LSR6B20D010BZ EC6B10208040 6LBWMW1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1120.5
2.5°	1120.5
5°	1113.2
7.5°	1103.5
10°	1089.0
12.5°	1072.1
15°	1050.3
17.5°	1026.1
20°	1001.9
22.5°	968.0
25°	929.3
27.5°	888.2
30°	834.9
32.5°	781.7
35°	713.9
37.5°	643.7
40°	566.3
42.5°	491.3
45°	421.1
47.5°	358.2
50°	302.5
52.5°	254.1
55°	213.0
57.5°	181.5
60°	154.9
62.5°	135.5
65°	118.6
67.5°	104.1
70°	89.5
72.5°	75.0
75°	60.5
77.5°	48.4
80°	36.3
82.5°	26.6
85°	14.5
87.5°	7.3
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)