

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P202626

Luminaire Tested: **LSR6B20D010BZ EC6B10209040 6LBMWMH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P202626
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR6B20D010BZ EC6B10209040 6LBMWMH1
Description: PORTFOLIO 6IN CYLINDER
MEDIUM DISTRIBUTION WITH WARM HAZE TRIM
WATTAGE D010TR-21.86 W DE010-20.46 W D5LT-21.24 W DMX-20.89 W DL2-22.5 W
DL3-21.8 6 W DLE-22.46 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1387.1 lumens
Efficiency: N/A
Efficacy: 66.7 lumens/watt
Spacing Criteria (0/90/45): 0.9 / 0.9 / 0.89
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 20.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P202626

CATALOG NUMBER: LSR6B20D010BZ EC6B10209040 6LBMWMH1

Luminous Intensity Polar Plot

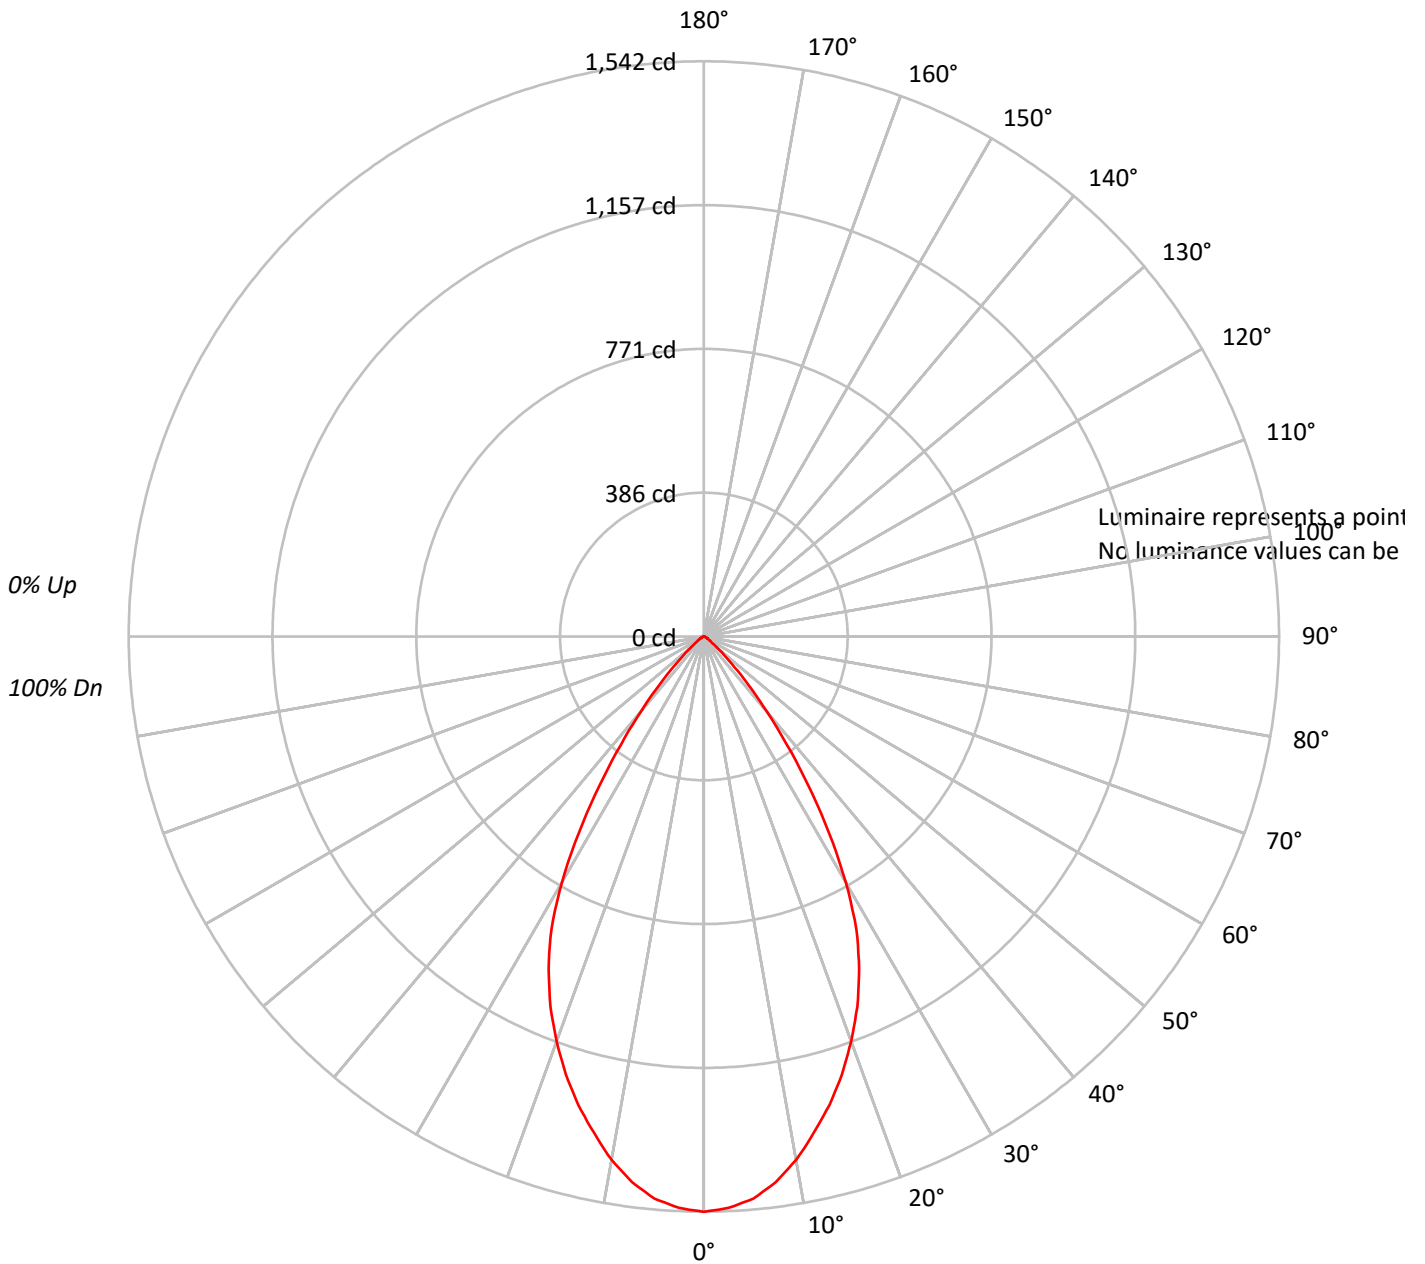



TEST NUMBER: P202626

CATALOG NUMBER: LSR6B20D010BZ EC6B10209040 6LBMWMH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86																			
3	102	95	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80																			
4	97	89	83	79	95	88	83	79	86	81	78	84	80	77	82	79	76	74																			
5	92	83	77	73	90	82	77	73	80	76	72	79	75	71	77	74	71	69																			
6	87	78	72	67	85	77	71	67	76	71	67	74	70	66	73	69	66	64																			
7	83	73	67	63	81	72	67	63	71	66	62	70	65	62	69	65	61	60																			
8	78	69	63	58	77	68	62	58	67	62	58	66	61	58	65	61	58	56																			
9	75	65	59	55	73	64	59	55	63	58	54	62	58	54	62	57	54	53																			
10	71	61	55	51	70	61	55	51	60	55	51	59	54	51	58	54	51	50																			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P202626

CATALOG NUMBER: LSR6B20D010BZ EC6B10209040 6LBMWMH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	141.6	10.2
10°-20°	363.4	26.2
20°-30°	446.4	32.2
30°-40°	306.1	22.1
40°-50°	98.4	7.1
50°-60°	20.0	1.4
60°-70°	7.8	0.6
70°-80°	3.0	0.2
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	951.4	68.6
0°-40°	1257.5	90.7
0°-60°	1375.9	99.2
0°-90°	1387.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1387.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1542	
5°	1513	142
15°	1300	363
25°	985	446
35°	488	306
45°	116	98
55°	20	20
65°	8	8
75°	2	3
85°	0	0
90°	0	



TEST NUMBER: P202626

CATALOG NUMBER: LSR6B20D010BZ EC6B10209040 6LBMWMH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1542.5
2.5°	1533.1
5°	1513.1
7.5°	1475.5
10°	1424.9
12.5°	1362.5
15°	1300.2
17.5°	1230.7
20°	1154.3
22.5°	1074.3
25°	984.8
27.5°	886.0
30°	761.3
32.5°	623.6
35°	488.3
37.5°	364.8
40°	262.4
42.5°	178.8
45°	116.5
47.5°	71.8
50°	43.5
52.5°	27.1
55°	20.0
57.5°	15.3
60°	11.8
62.5°	9.4
65°	8.2
67.5°	5.9
70°	4.7
72.5°	3.5
75°	2.4
77.5°	2.4
80°	1.2
82.5°	1.2
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)