

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P205107

Luminaire Tested: **LSR6B30D010BZ EC6B30509024 6LBMLI1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P205107
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR6B30D010BZ EC6B30509024 6LBMLI1
Description: PORTFOLIO 6IN CYLINDER
MEDIUM DISTRIBUTION WITH SPECULAR CLEAR TRIM
WATTAGE D010TR-27.4 W DE010-27.95 W D5LT-27.65 W DMX-27.73 W DL2-29.56 W
DL3-29.67 W DLE-29.73 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1910.7 lumens
Efficiency: N/A
Efficacy: 68.2 lumens/watt
Spacing Criteria (0/90/45): 0.85 / 0.85 / 0.85
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P205107

CATALOG NUMBER: LSR6B30D010BZ EC6B30509024 6LBML11

Luminous Intensity Polar Plot

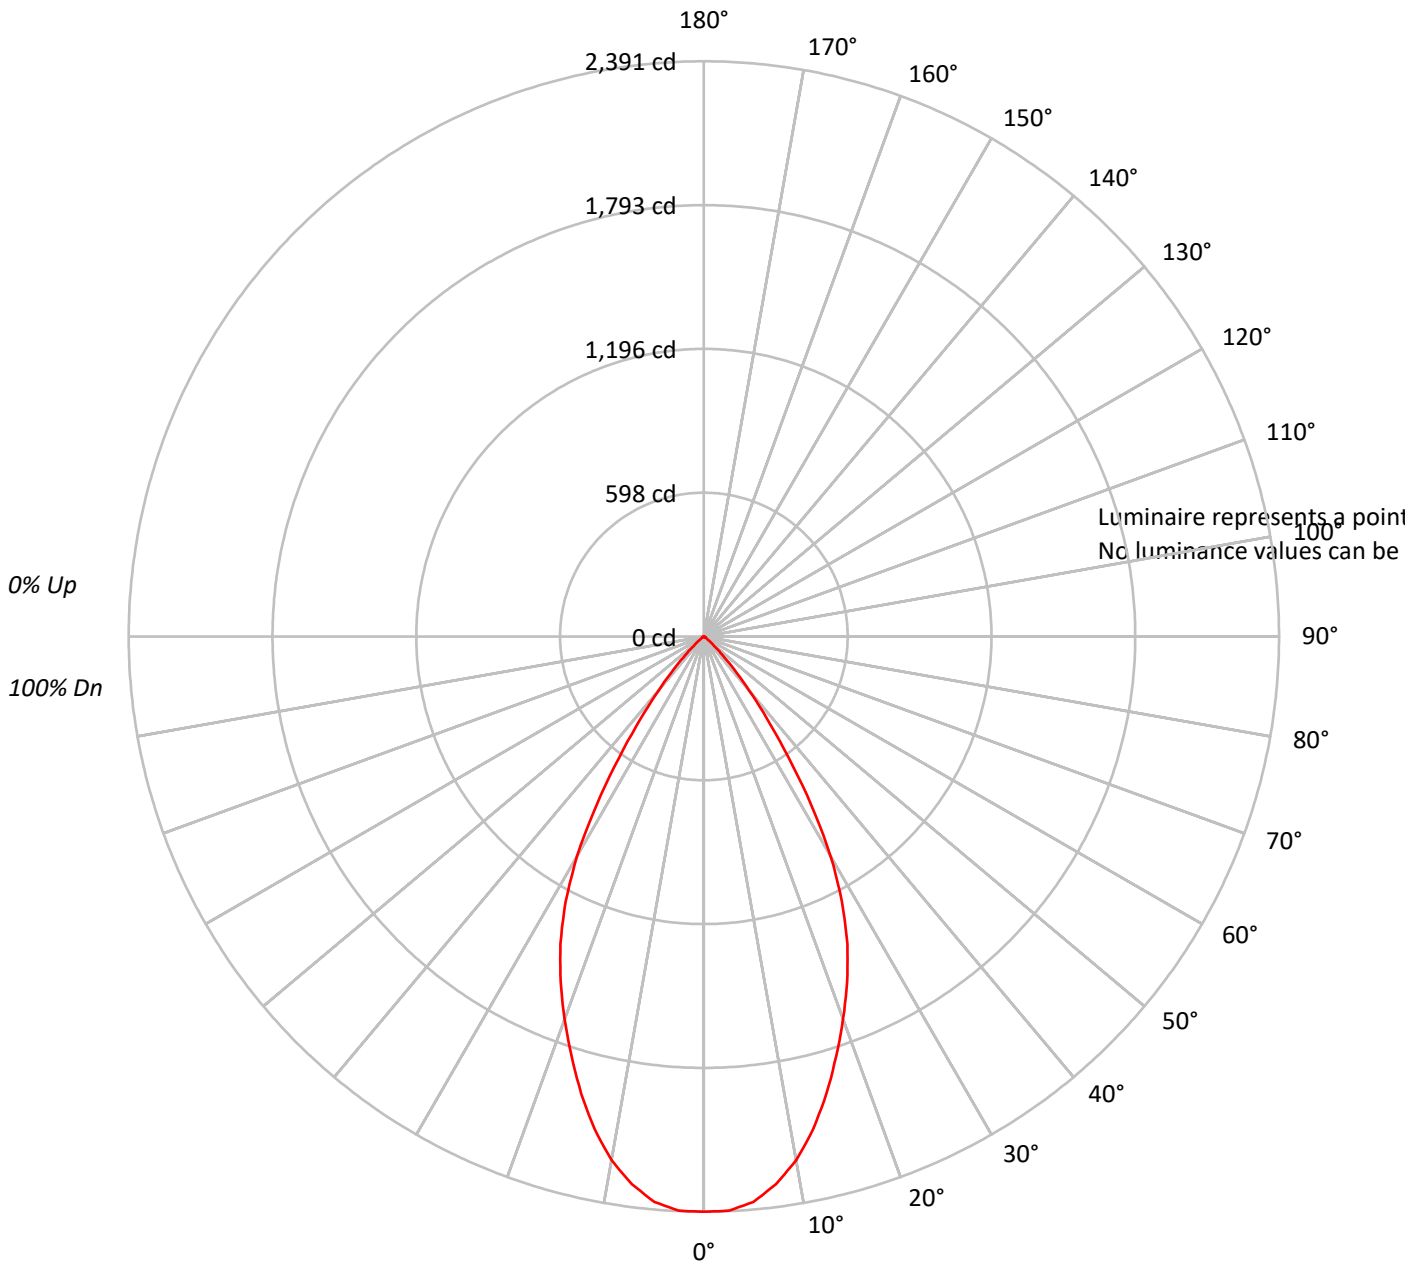



TEST NUMBER: P205107

CATALOG NUMBER: LSR6B30D010BZ EC6B30509024 6LBML11

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	106	111	109	107	105	105	103	101	101	100	98	98	97	96	94			
2	108	103	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88			
3	103	97	92	88	101	95	91	87	93	89	86	90	87	85	88	85	83	82			
4	98	91	85	81	96	89	84	81	87	83	80	85	82	79	83	80	78	76			
5	93	85	79	75	91	84	79	75	82	78	74	81	77	73	79	76	73	71			
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67			
7	84	75	69	65	83	75	69	65	73	68	65	72	68	64	71	67	64	63			
8	80	71	65	61	79	70	65	61	69	64	61	68	64	60	67	63	60	59			
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55			
10	73	64	58	54	72	63	58	54	62	57	54	62	57	54	61	57	54	52			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P205107

CATALOG NUMBER: LSR6B30D010BZ EC6B30509024 6LBML11

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	220.3	11.5
10°-20°	548.4	28.7
20°-30°	637.5	33.4
30°-40°	390.4	20.4
40°-50°	96.9	5.1
50°-60°	11.3	0.6
60°-70°	4.2	0.2
70°-80°	1.6	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1406.2	73.6
0°-40°	1796.6	94.0
0°-60°	1904.9	99.7
0°-90°	1910.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1910.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2391	
5°	2359	220
15°	1968	548
25°	1411	638
35°	611	390
45°	108	97
55°	10	11
65°	5	4
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P205107

CATALOG NUMBER: LSR6B30D010BZ EC6B30509024 6LBML11

CANDELA DISTRIBUTION (FULL):

0°	
0°	2391.1
2.5°	2388.7
5°	2359.4
7.5°	2295.8
10°	2210.2
12.5°	2097.8
15°	1968.2
17.5°	1828.8
20°	1691.9
22.5°	1555.0
25°	1410.7
27.5°	1244.5
30°	1053.8
32.5°	831.3
35°	611.2
37.5°	430.3
40°	293.4
42.5°	183.4
45°	107.6
47.5°	61.1
50°	31.8
52.5°	14.7
55°	9.8
57.5°	7.3
60°	7.3
62.5°	4.9
65°	4.9
67.5°	2.4
70°	2.4
72.5°	2.4
75°	2.4
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)