

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P202635

Luminaire Tested: **LSR6B30D010BZ EC6B30509024 6LBMWMH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P202635  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR6B30D010BZ EC6B30509024 6LBMWMH1  
Description: PORTFOLIO 6IN CYLINDER  
MEDIUM DISTRIBUTION WITH WARM HAZE TRIM  
WATTAGE D010TR-27.4 W DE010-27.95 W D5LT-27.65 W DMX-27.73 W DL2-29.56 W  
DL3-29.67 W DLE-29.73 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1675.2 lumens  
Efficiency: N/A  
Efficacy: 59.8 lumens/watt  
Spacing Criteria (0/90/45): 0.9 / 0.9 / 0.89  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 28  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P202635

CATALOG NUMBER: LSR6B30D010BZ EC6B30509024 6LBMWMH1

### Luminous Intensity Polar Plot

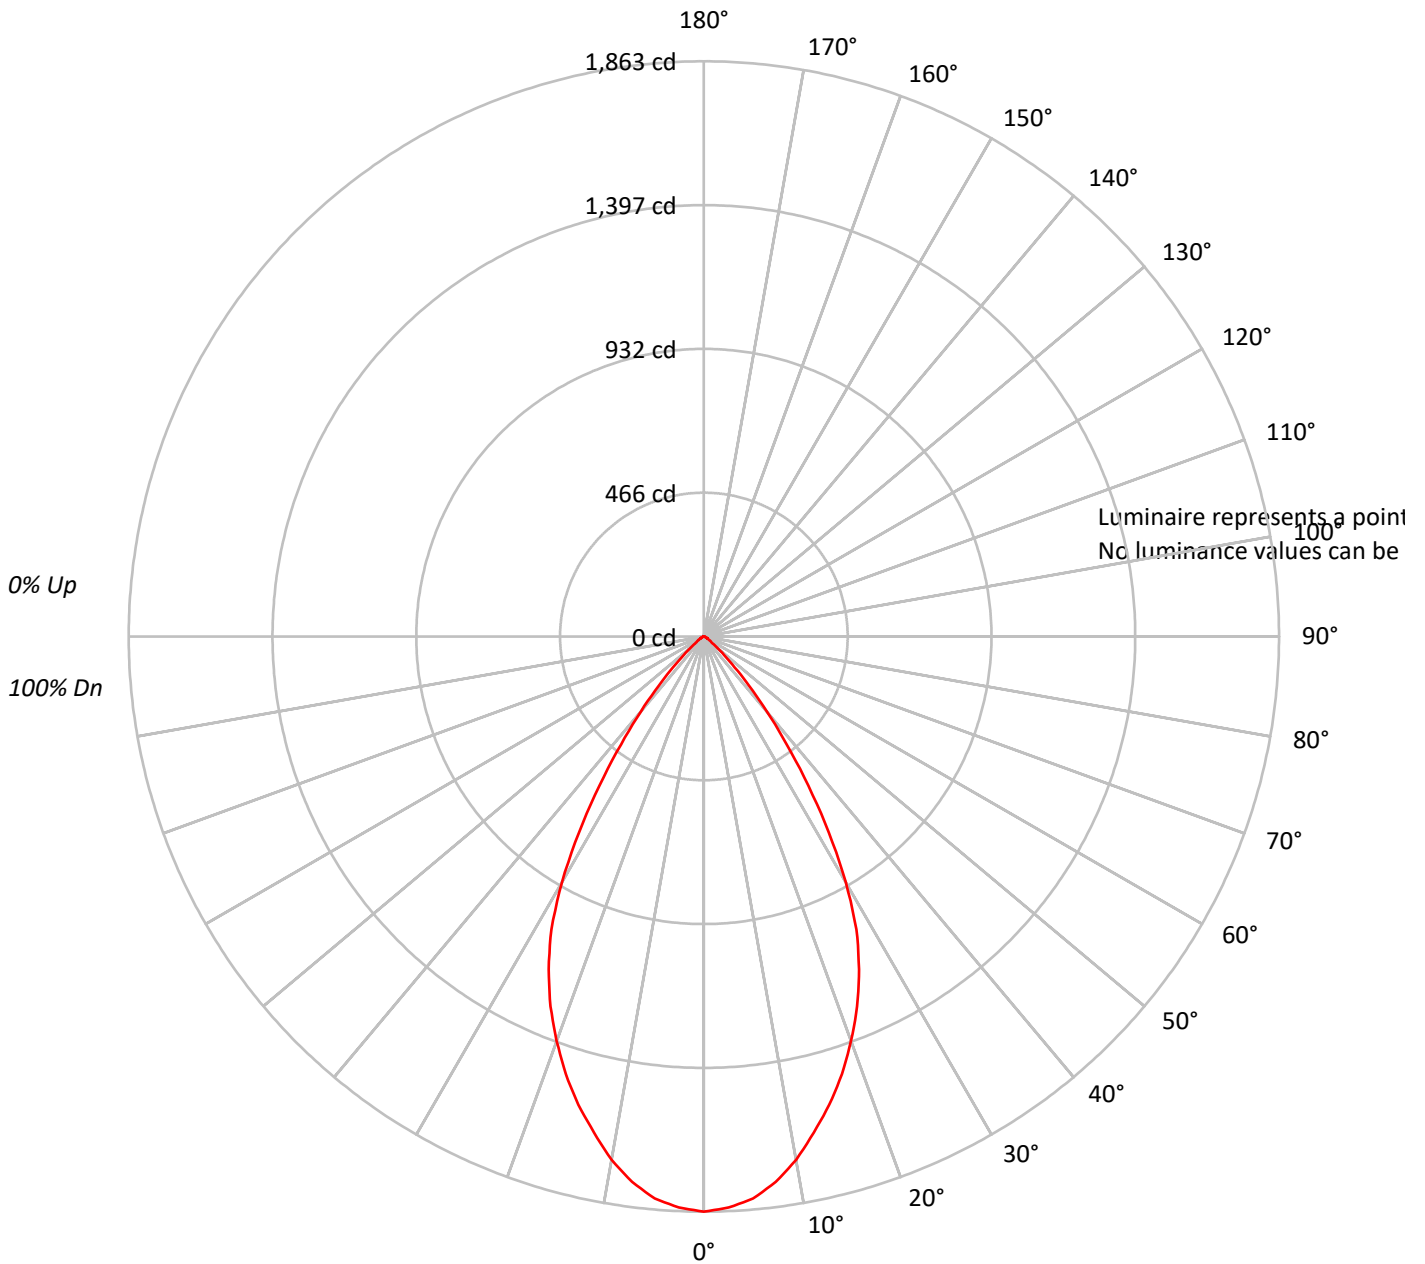



TEST NUMBER: P202635

CATALOG NUMBER: LSR6B30D010BZ EC6B30509024 6LBMWMH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86																			
3	102	95	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80																			
4	97	89	83	79	95	88	83	79	86	81	78	84	80	77	82	79	76	74																			
5	92	83	77	73	90	82	77	73	80	76	72	79	75	71	77	74	71	69																			
6	87	78	72	67	85	77	71	67	76	71	67	74	70	66	73	69	66	64																			
7	83	73	67	63	81	72	67	63	71	66	62	70	65	62	69	65	61	60																			
8	78	69	63	58	77	68	62	58	67	62	58	66	61	58	65	61	58	56																			
9	75	65	59	55	73	64	59	55	63	58	54	62	58	54	62	57	54	53																			
10	71	61	55	51	70	61	55	51	60	55	51	59	54	51	58	54	51	50																			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P202635

CATALOG NUMBER: LSR6B30D010BZ EC6B30509024 6LBMWMH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	171.0	10.2
10°-20°	438.9	26.2
20°-30°	539.1	32.2
30°-40°	369.7	22.1
40°-50°	118.8	7.1
50°-60°	24.1	1.4
60°-70°	9.5	0.6
70°-80°	3.5	0.2
80°-90°	0.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1149.0	68.6
0°-40°	1518.7	90.7
0°-60°	1661.6	99.2
0°-90°	1675.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1675.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1863	
5°	1827	171
15°	1570	439
25°	1189	539
35°	590	370
45°	141	119
55°	24	24
65°	10	9
75°	3	4
85°	0	1
90°	0	



TEST NUMBER: P202635

CATALOG NUMBER: LSR6B30D010BZ EC6B30509024 6LBMWMH1

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1863.0
2.5°	1851.6
5°	1827.4
7.5°	1782.0
10°	1720.9
12.5°	1645.5
15°	1570.2
17.5°	1486.4
20°	1394.0
22.5°	1297.4
25°	1189.4
27.5°	1070.0
30°	919.4
32.5°	753.1
35°	589.7
37.5°	440.5
40°	316.9
42.5°	216.0
45°	140.7
47.5°	86.7
50°	52.6
52.5°	32.7
55°	24.2
57.5°	18.5
60°	14.2
62.5°	11.4
65°	9.9
67.5°	7.1
70°	5.7
72.5°	4.3
75°	2.8
77.5°	2.8
80°	1.4
82.5°	1.4
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)