

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P205509

Luminaire Tested: **LSR6B30D010BZ EC6B30508027 6LBMGPH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P205509
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR6B30D010BZ EC6B30508027 6LBMGPH1
Description: PORTFOLIO 6IN CYLINDER
MEDIUM DISTRIBUTION WITH GRAPHITE HAZE TRIM
WATTAGE D010TR-27.4 W DE010-27.95 W D5LT-27.65 W DMX-27.73 W DL2-29.56 W
DL3-29.67 W DLE-29.73 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1577.2 lumens
Efficiency: N/A
Efficacy: 56.3 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.91
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P205509

CATALOG NUMBER: LSR6B30D010BZ EC6B30508027 6LBMGPH1

Luminous Intensity Polar Plot

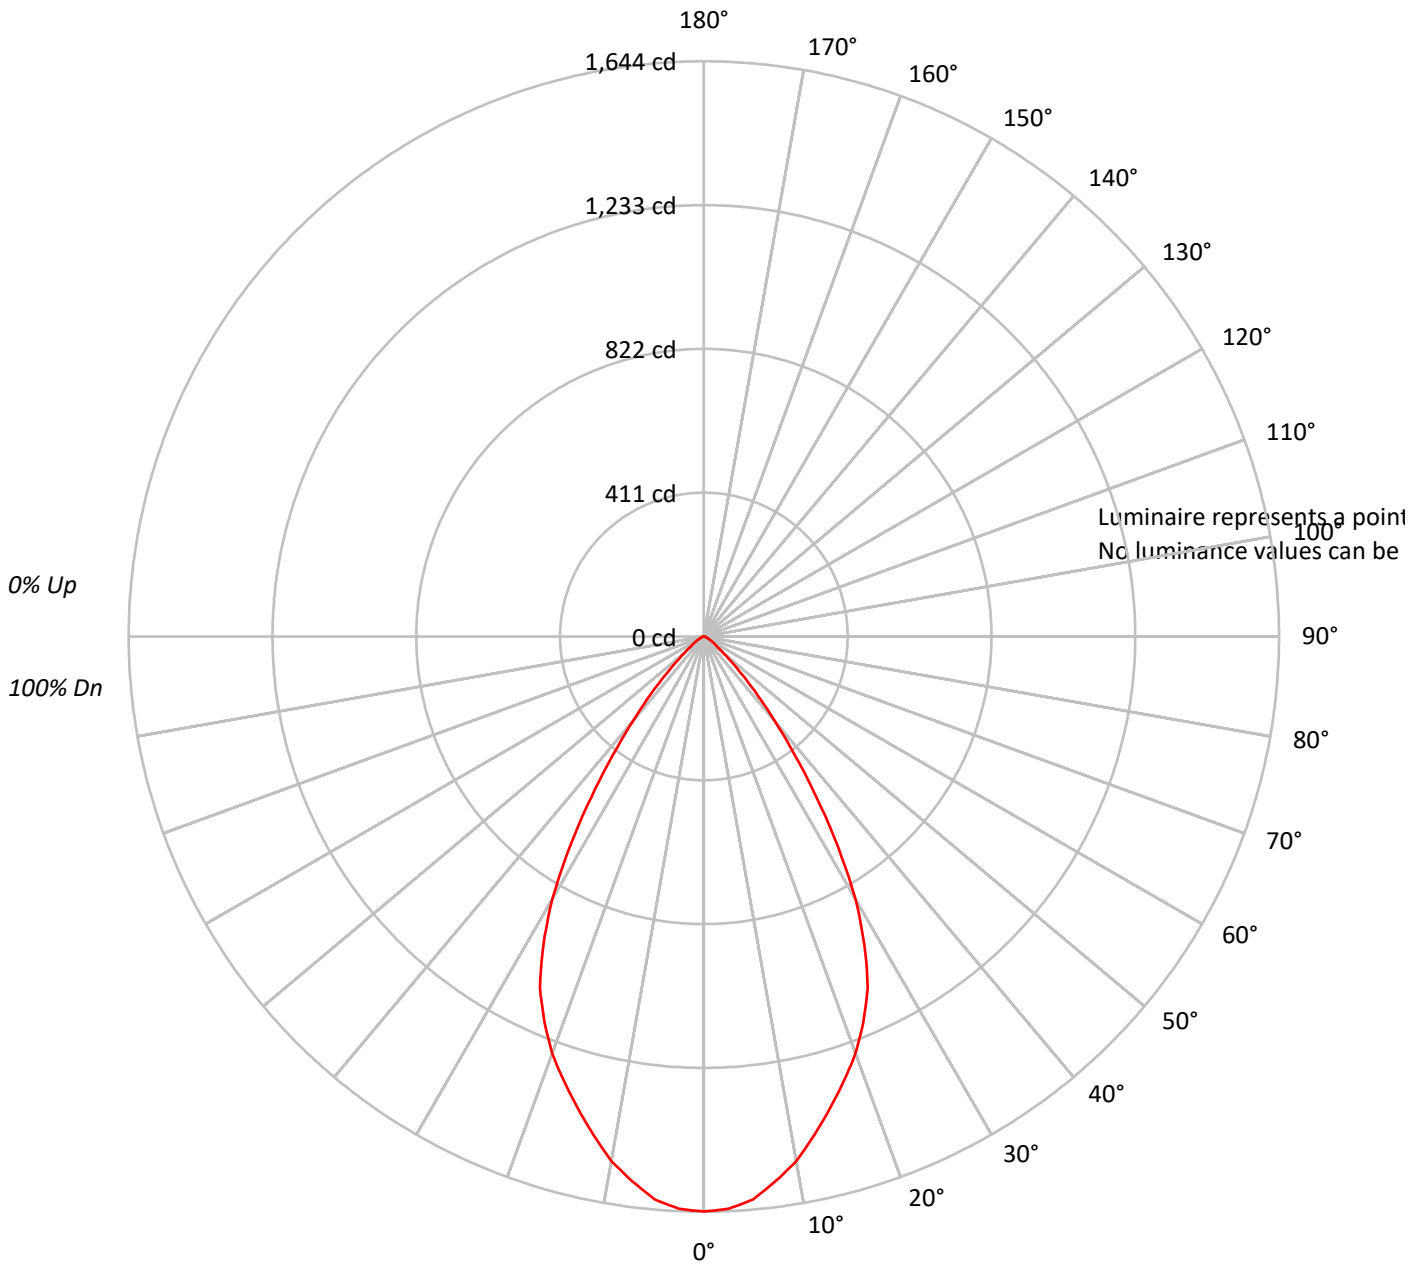



TEST NUMBER: P205509

CATALOG NUMBER: LSR6B30D010BZ EC6B30508027 6LBMGPH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93		
2	107	102	98	94	105	100	97	93	97	94	91	94	92	89	91	89	87	86		
3	102	95	90	85	100	93	89	85	91	87	83	88	85	82	86	83	81	79		
4	96	88	82	78	94	87	82	77	85	80	77	83	79	76	81	78	75	73		
5	91	82	76	72	89	81	76	71	79	74	71	78	73	70	76	72	69	68		
6	86	77	71	66	85	76	70	66	74	69	65	73	68	65	72	68	64	63		
7	82	72	66	61	80	71	65	61	70	65	61	69	64	60	68	63	60	59		
8	77	68	61	57	76	67	61	57	66	60	57	65	60	56	64	59	56	55		
9	74	64	57	53	72	63	57	53	62	57	53	61	56	53	60	56	53	51		
10	70	60	54	50	69	59	54	50	59	53	50	58	53	49	57	53	49	48		

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P205509

CATALOG NUMBER: LSR6B30D010BZ EC6B30508027 6LBMGPH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	151.0	9.6
10°-20°	391.8	24.8
20°-30°	499.2	31.6
30°-40°	352.8	22.4
40°-50°	128.8	8.2
50°-60°	35.7	2.3
60°-70°	12.9	0.8
70°-80°	4.6	0.3
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1041.9	66.1
0°-40°	1394.7	88.4
0°-60°	1559.2	98.9
0°-90°	1577.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1577.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1644	
5°	1615	151
15°	1395	392
25°	1108	499
35°	561	353
45°	156	129
55°	38	36
65°	13	13
75°	3	5
85°	0	0
90°	0	



TEST NUMBER: P205509

CATALOG NUMBER: LSR6B30D010BZ EC6B30508027 6LBMGPH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1643.5
2.5°	1637.1
5°	1614.9
7.5°	1570.3
10°	1522.5
12.5°	1458.8
15°	1395.1
17.5°	1331.4
20°	1267.7
22.5°	1191.2
25°	1108.4
27.5°	993.8
30°	866.4
32.5°	713.5
35°	560.6
37.5°	426.8
40°	312.1
42.5°	226.1
45°	156.1
47.5°	105.1
50°	70.1
52.5°	47.8
55°	38.2
57.5°	28.7
60°	22.3
62.5°	15.9
65°	12.7
67.5°	9.6
70°	6.4
72.5°	6.4
75°	3.2
77.5°	3.2
80°	3.2
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)