

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P203351

Luminaire Tested: **LSR6B30D010BZ EC6B30508027 6LBMWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203351
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR6B30D010BZ EC6B30508027 6LBMWH1
Description: PORTFOLIO 6IN CYLINDER
MEDIUM DISTRIBUTION WITH WHEAT TRIM
WATTAGE D010TR-27.4 W DE010-27.95 W D5LT-27.65 W DMX-27.73 W DL2-29.56 W
DL3-29.67 W DLE-29.73 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2231.4 lumens
Efficiency: N/A
Efficacy: 79.7 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.85
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203351

CATALOG NUMBER: LSR6B30D010BZ EC6B30508027 6LBMWH1

Luminous Intensity Polar Plot

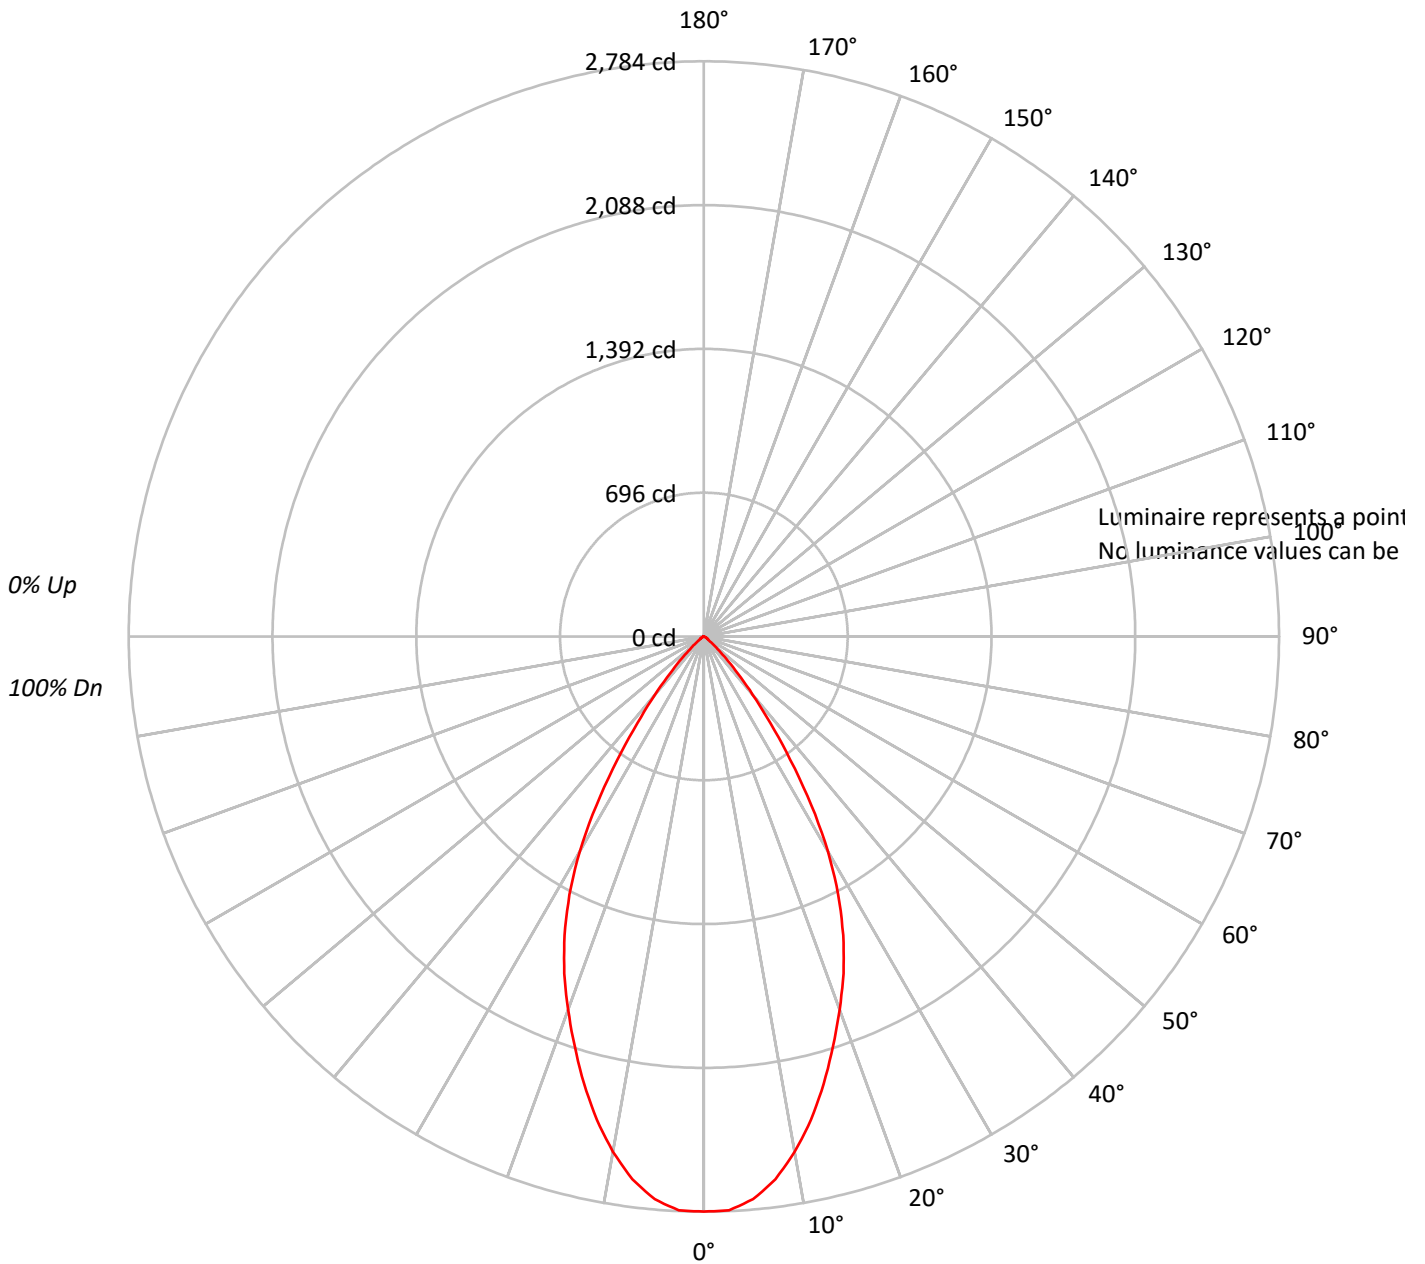



TEST NUMBER: P203351

CATALOG NUMBER: LSR6B30D010BZ EC6B30508027 6LBMWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	108	106	111	109	106	104	105	103	101	101	100	98	97	96	95	94
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	91	89	87
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81
4	97	90	85	80	96	89	84	80	87	82	79	85	81	78	83	80	77	76
5	93	84	79	74	91	83	78	74	82	77	73	80	76	73	78	75	72	71
6	88	79	73	69	87	78	73	69	77	72	68	76	71	68	74	70	67	66
7	84	75	69	64	82	74	68	64	73	68	64	71	67	64	70	66	63	62
8	80	70	64	60	78	70	64	60	69	64	60	68	63	60	67	62	59	58
9	76	66	61	57	75	66	60	57	65	60	56	64	59	56	63	59	56	55
10	72	63	57	53	71	62	57	53	62	57	53	61	56	53	60	56	53	52

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P203351

CATALOG NUMBER: LSR6B30D010BZ EC6B30508027 6LBMWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	254.5	11.4
10°-20°	624.8	28.0
20°-30°	722.9	32.4
30°-40°	462.1	20.7
40°-50°	131.0	5.9
50°-60°	23.4	1.0
60°-70°	9.5	0.4
70°-80°	3.3	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1602.1	71.8
0°-40°	2064.2	92.5
0°-60°	2218.6	99.4
0°-90°	2231.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2231.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2784	
5°	2734	254
15°	2241	625
25°	1595	723
35°	729	462
45°	152	131
55°	22	23
65°	9	10
75°	3	3
85°	0	0
90°	0	



TEST NUMBER: P203351

CATALOG NUMBER: LSR6B30D010BZ EC6B30508027 6LBMWH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2783.7
2.5°	2780.6
5°	2734.0
7.5°	2650.3
10°	2532.3
12.5°	2395.8
15°	2240.6
17.5°	2079.2
20°	1921.0
22.5°	1765.8
25°	1595.1
27.5°	1408.9
30°	1201.0
32.5°	968.2
35°	729.3
37.5°	527.6
40°	366.2
42.5°	242.1
45°	152.1
47.5°	90.0
50°	52.8
52.5°	31.0
55°	21.7
57.5°	18.6
60°	15.5
62.5°	12.4
65°	9.3
67.5°	6.2
70°	6.2
72.5°	3.1
75°	3.1
77.5°	3.1
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)