

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P202847

Luminaire Tested: **LSR6B30D010BZ EC6B30509727 6LBWWH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P202847  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR6B30D010BZ EC6B30509727 6LBWWH1  
Description: PORTFOLIO 6IN CYLINDER  
WIDE DISTRIBUTION WITH WHEAT TRIM  
WATTAGE D010TR-27.4 W DE010-27.95 W D5LT-27.65 W DMX-27.73 W DL2-29.56 W  
DL3-29.67 W DLE-29.73 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1929.4 lumens  
Efficiency: N/A  
Efficacy: 68.9 lumens/watt  
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.18  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 28  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P202847

CATALOG NUMBER: LSR6B30D010BZ EC6B30509727 6LBWWH1

### Luminous Intensity Polar Plot

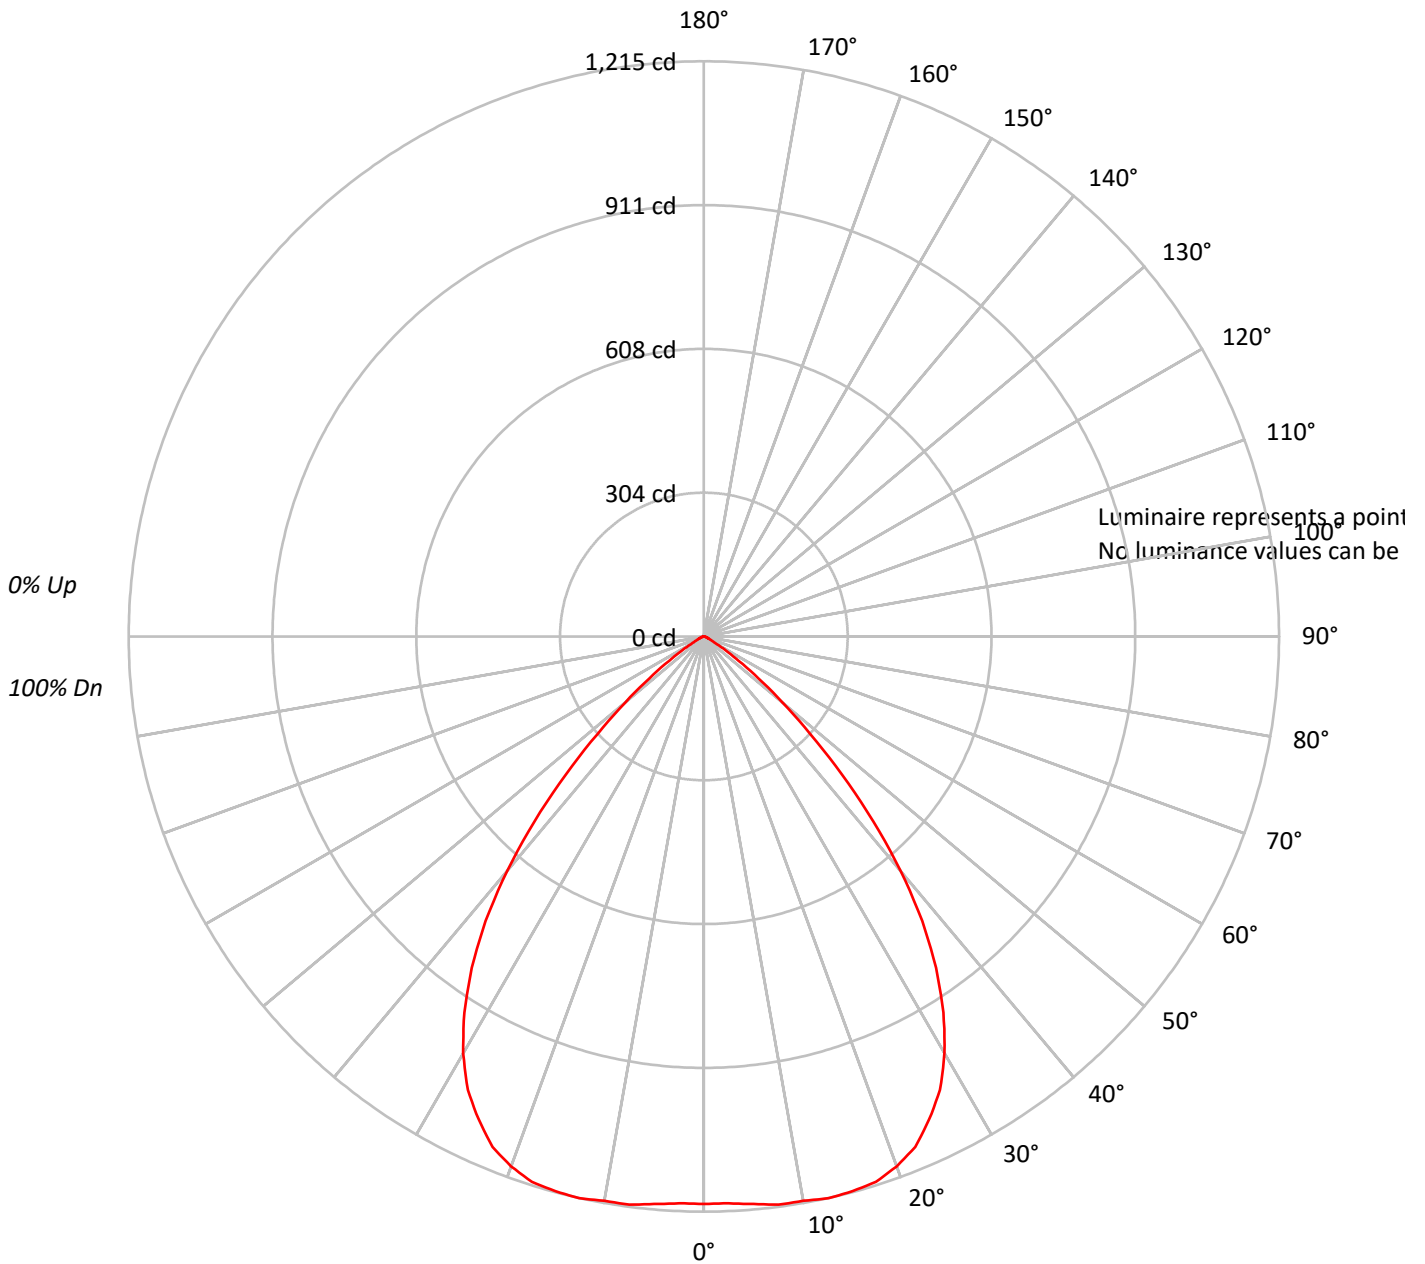



TEST NUMBER: P202847

CATALOG NUMBER: LSR6B30D010BZ EC6B30509727 6LBWWH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	109	107	104	110	107	105	102	103	101	99	99	98	96	96	95	93	92
2	106	100	96	92	104	98	94	91	95	92	89	92	89	87	89	87	85	83
3	99	92	86	81	97	90	85	81	88	83	79	85	81	78	83	80	77	75
4	93	84	78	73	91	83	77	72	81	76	71	79	74	71	77	73	70	68
5	87	77	71	66	85	76	70	65	75	69	65	73	68	64	71	67	63	62
6	82	71	64	59	80	71	64	59	69	63	59	67	62	58	66	61	58	56
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51
8	72	61	54	49	71	61	54	49	59	53	49	58	53	49	57	52	49	47
9	68	57	50	45	67	56	50	45	55	49	45	54	49	45	53	48	45	43
10	64	53	46	42	63	53	46	42	52	46	42	51	45	42	50	45	41	40

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P202847

CATALOG NUMBER: LSR6B30D010BZ EC6B30509727 6LBWWH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	115.2	6.0
10°-20°	342.5	17.8
20°-30°	515.6	26.7
30°-40°	527.2	27.3
40°-50°	320.2	16.6
50°-60°	90.2	4.7
60°-70°	13.7	0.7
70°-80°	4.4	0.2
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	973.4	50.4
0°-40°	1500.6	77.8
0°-60°	1911.0	99.0
0°-90°	1929.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1929.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1198	
5°	1203	115
15°	1213	343
25°	1126	516
35°	855	527
45°	412	320
55°	90	90
65°	12	14
75°	5	4
85°	0	0
90°	0	



TEST NUMBER: P202847

CATALOG NUMBER: LSR6B30D010BZ EC6B30509727 6LBWWH1

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1198.4
2.5°	1198.4
5°	1203.2
7.5°	1210.5
10°	1210.5
12.5°	1215.3
15°	1212.9
17.5°	1208.1
20°	1191.1
22.5°	1166.9
25°	1125.8
27.5°	1079.8
30°	1016.8
32.5°	941.8
35°	854.6
37.5°	757.8
40°	646.4
42.5°	530.2
45°	411.6
47.5°	305.0
50°	215.5
52.5°	145.3
55°	89.6
57.5°	53.3
60°	26.6
62.5°	16.9
65°	12.1
67.5°	9.7
70°	7.3
72.5°	4.8
75°	4.8
77.5°	2.4
80°	2.4
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)