

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P203352

Luminaire Tested: **LSR6B30D010BZ EC6B30508030 6LBMWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203352
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR6B30D010BZ EC6B30508030 6LBMWH1
Description: PORTFOLIO 6IN CYLINDER
MEDIUM DISTRIBUTION WITH WHEAT TRIM
WATTAGE D010TR-27.4 W DE010-27.95 W D5LT-27.65 W DMX-27.73 W DL2-29.56 W
DL3-29.67 W DLE-29.73 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2332.6 lumens
Efficiency: N/A
Efficacy: 83.3 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.85
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203352

CATALOG NUMBER: LSR6B30D010BZ EC6B30508030 6LBMWH1

Luminous Intensity Polar Plot

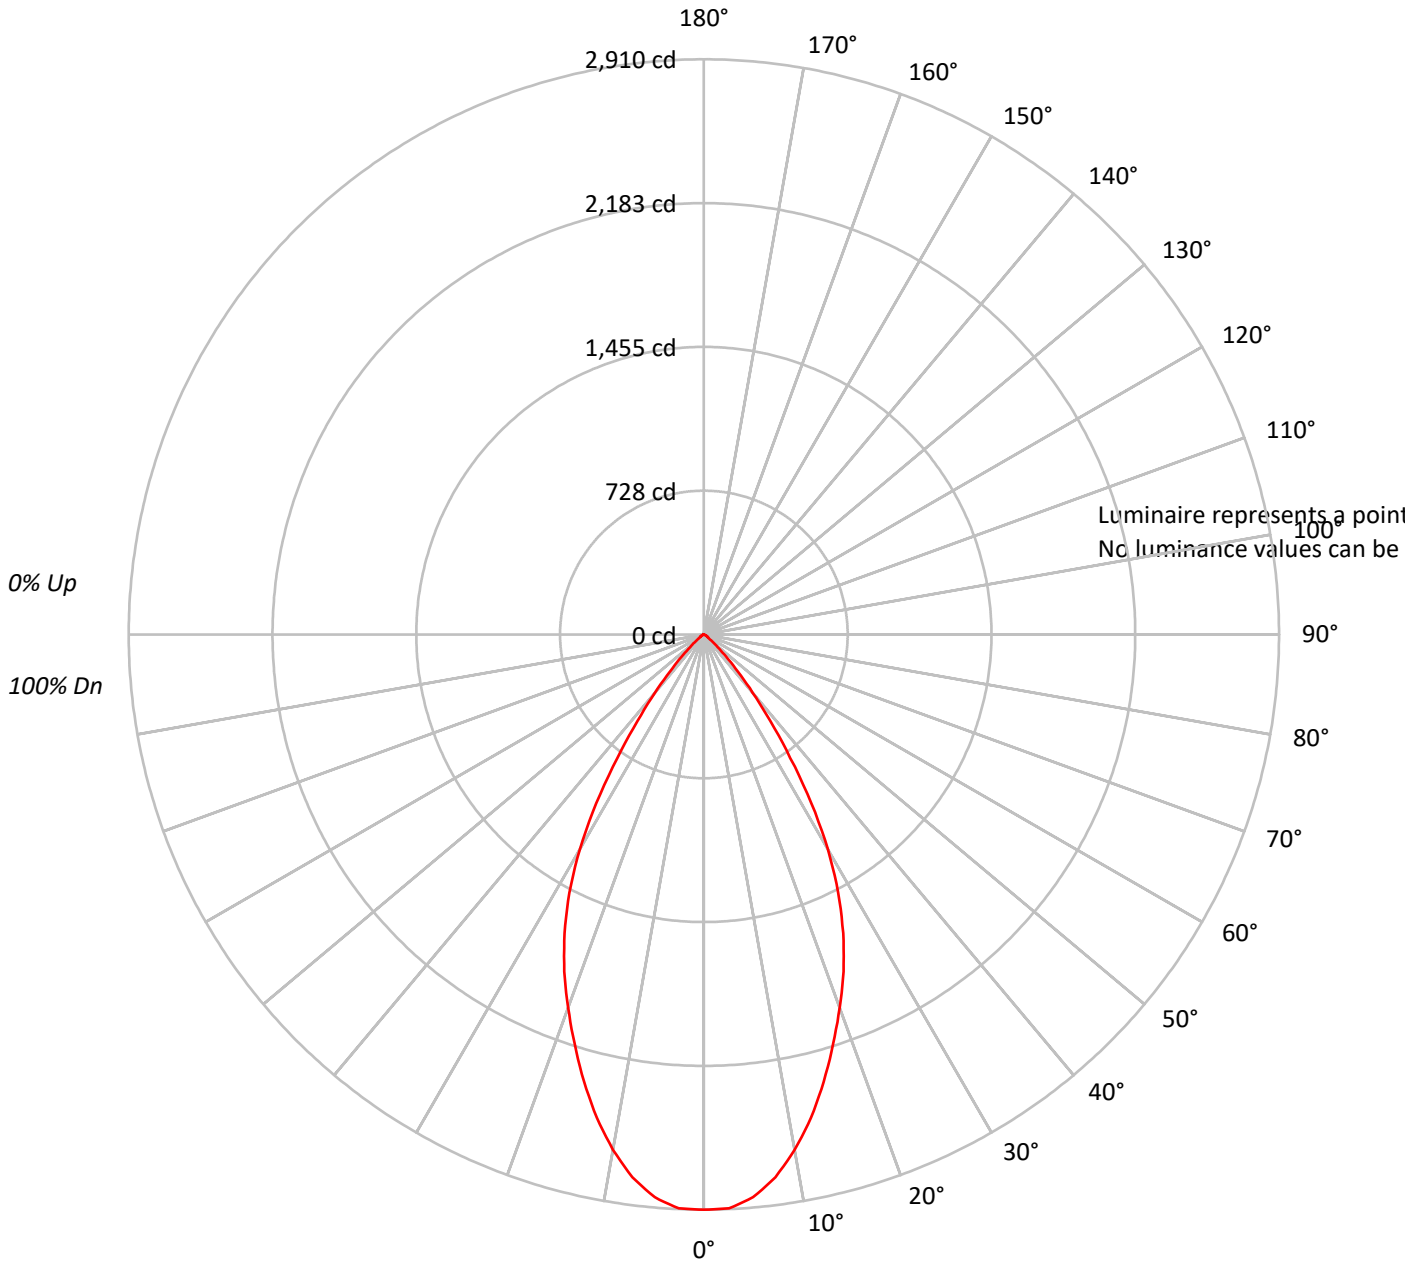



TEST NUMBER: P203352

CATALOG NUMBER: LSR6B30D010BZ EC6B30508030 6LBMWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	108	106	111	109	106	104	105	103	101	101	100	98	97	96	95	94
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	93	91	89	87
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81
4	97	90	85	80	96	89	84	80	87	82	79	85	81	78	83	80	77	76
5	93	84	79	74	91	83	78	74	82	77	73	80	76	73	78	75	72	71
6	88	79	73	69	87	78	73	69	77	72	68	76	71	68	74	70	67	66
7	84	75	69	64	82	74	68	64	73	68	64	71	67	64	70	66	63	62
8	80	70	64	60	78	70	64	60	69	64	60	68	63	60	67	62	59	58
9	76	66	61	57	75	66	60	57	65	60	56	64	59	56	63	59	56	55
10	72	63	57	53	71	62	57	53	62	57	53	61	56	53	60	56	53	52

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P203352

CATALOG NUMBER: LSR6B30D010BZ EC6B30508030 6LBMWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	266.0	11.4
10°-20°	653.1	28.0
20°-30°	755.7	32.4
30°-40°	483.0	20.7
40°-50°	137.0	5.9
50°-60°	24.4	1.0
60°-70°	10.0	0.4
70°-80°	3.4	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1674.8	71.8
0°-40°	2157.9	92.5
0°-60°	2319.3	99.4
0°-90°	2332.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2332.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2910	
5°	2858	266
15°	2342	653
25°	1668	756
35°	762	483
45°	159	137
55°	23	24
65°	10	10
75°	3	3
85°	0	0
90°	0	



TEST NUMBER: P203352

CATALOG NUMBER: LSR6B30D010BZ EC6B30508030 6LBMWH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2910.0
2.5°	2906.8
5°	2858.1
7.5°	2770.5
10°	2647.3
12.5°	2504.5
15°	2342.3
17.5°	2173.6
20°	2008.2
22.5°	1845.9
25°	1667.5
27.5°	1472.9
30°	1255.5
32.5°	1012.2
35°	762.4
37.5°	551.5
40°	382.8
42.5°	253.0
45°	159.0
47.5°	94.1
50°	55.2
52.5°	32.4
55°	22.7
57.5°	19.5
60°	16.2
62.5°	13.0
65°	9.7
67.5°	6.5
70°	6.5
72.5°	3.2
75°	3.2
77.5°	3.2
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)