

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P202734

Luminaire Tested: **LSR6B30D010BZ EC6B30508030 6LBWH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P202734  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR6B30D010BZ EC6B30508030 6LBWH1  
Description: PORTFOLIO 6IN CYLINDER  
WIDE DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM  
WATTAGE D010TR-27.4 W DE010-27.95 W D5LT-27.65 W DMX-27.73 W DL2-29.56 W  
DL3-29.67 W DLE-29.73 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2613.7 lumens  
Efficiency: N/A  
Efficacy: 93.3 lumens/watt  
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.16  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 28  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P202734

CATALOG NUMBER: LSR6B30D010BZ EC6B30508030 6LBWH1

### Luminous Intensity Polar Plot

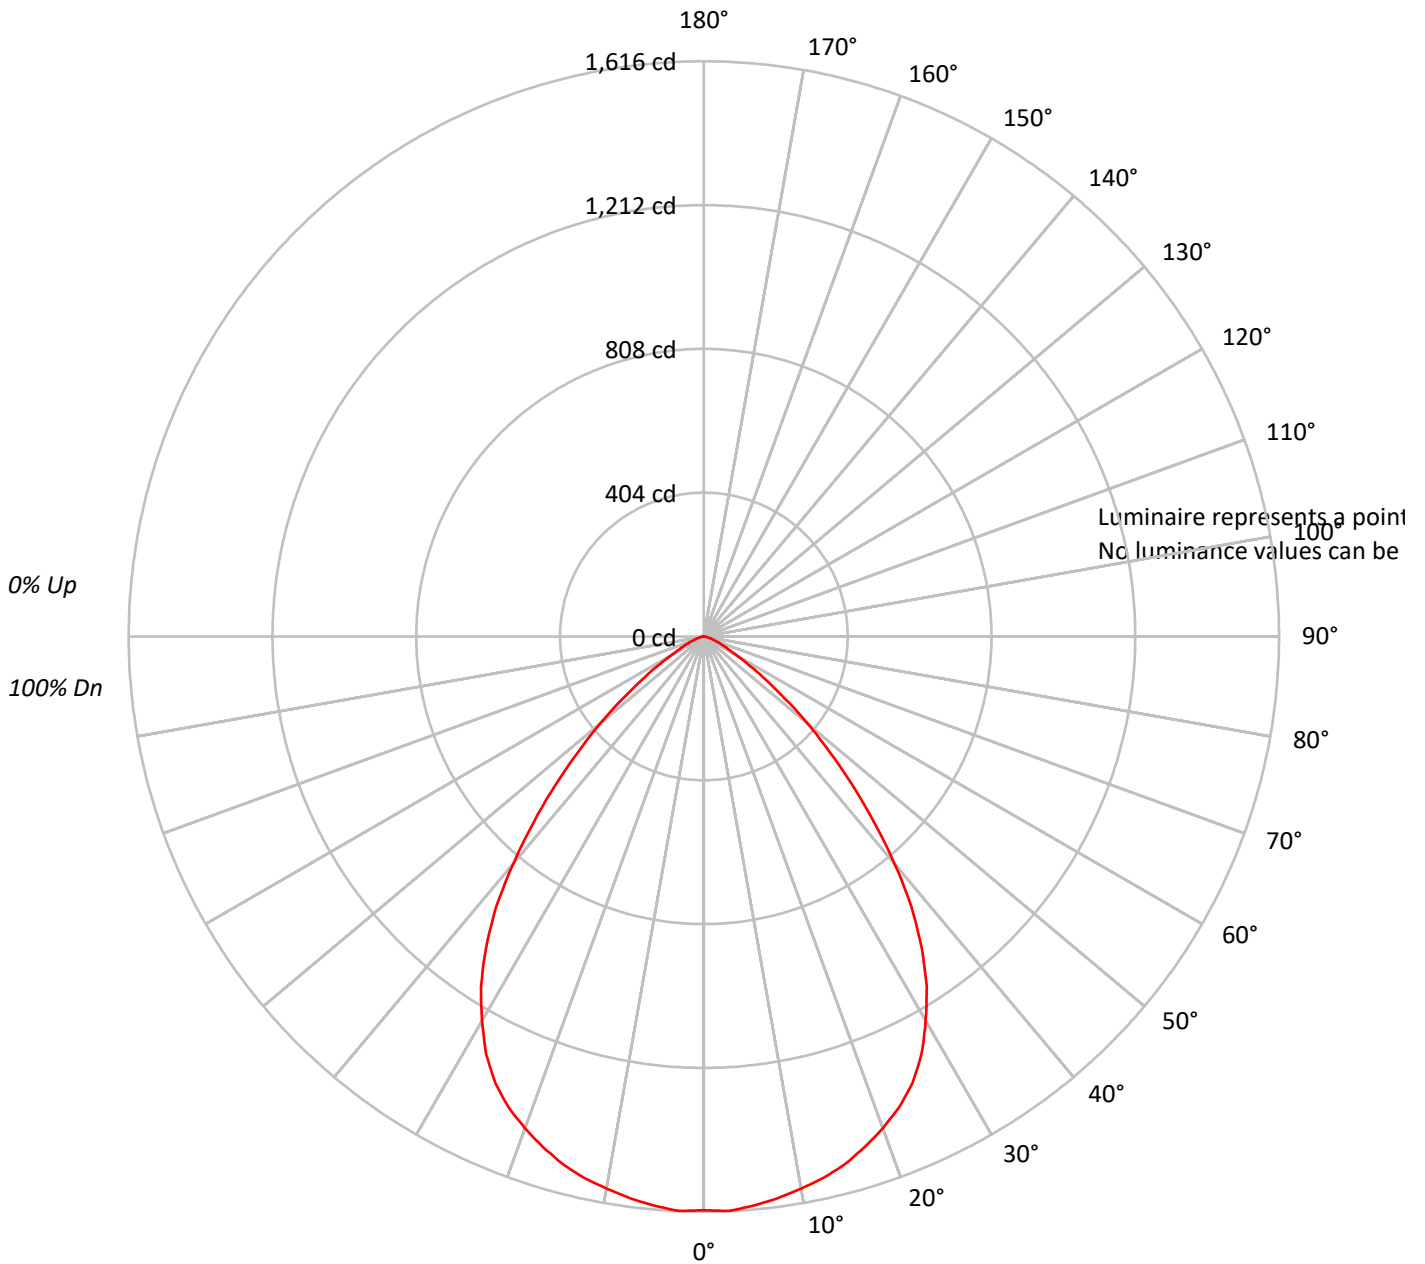




TEST NUMBER: P202734

CATALOG NUMBER: LSR6B30D010BZ EC6B30508030 6LBWH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	101	103	100	98	99	97	95	95	94	93	91																			
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81																			
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75	73																			
4	92	82	75	70	90	81	75	70	79	73	69	77	72	68	75	71	67	65																			
5	86	75	68	63	84	74	68	63	72	66	62	71	65	61	69	64	61	59																			
6	80	69	62	57	78	68	61	56	67	61	56	65	60	56	64	59	55	53																			
7	75	64	56	51	73	63	56	51	62	55	51	60	55	51	59	54	50	49																			
8	70	59	52	47	69	58	51	47	57	51	46	56	50	46	55	50	46	44																			
9	66	55	48	43	65	54	47	43	53	47	43	52	47	42	51	46	42	41																			
10	62	51	44	40	61	50	44	39	50	43	39	49	43	39	48	43	39	38																			

**AVERAGE LUMINANCE (cd/sqm):**

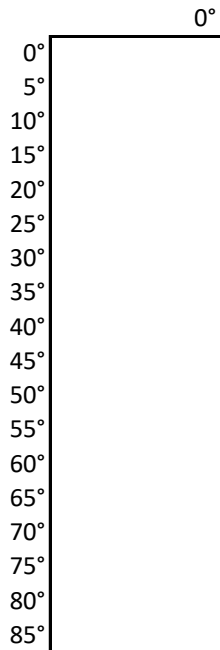



TEST NUMBER: P202734

CATALOG NUMBER: LSR6B30D010BZ EC6B30508030 6LBWH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	152.3	5.8
10°-20°	432.0	16.5
20°-30°	633.5	24.2
30°-40°	659.3	25.2
40°-50°	456.1	17.5
50°-60°	198.6	7.6
60°-70°	60.9	2.3
70°-80°	18.3	0.7
80°-90°	2.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1217.8	46.6
0°-40°	1877.0	71.8
0°-60°	2531.7	96.9
0°-90°	2613.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2613.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1612	
5°	1605	152
15°	1534	432
25°	1385	633
35°	1067	659
45°	589	456
55°	213	199
65°	58	61
75°	17	18
85°	3	3
90°	0	



TEST NUMBER: P202734

CATALOG NUMBER: LSR6B30D010BZ EC6B30508030 6LBWH1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1612.1
2.5°	1615.5
5°	1605.3
7.5°	1591.8
10°	1574.8
12.5°	1557.9
15°	1534.2
17.5°	1503.7
20°	1469.8
22.5°	1432.6
25°	1385.2
27.5°	1324.2
30°	1246.3
32.5°	1165.0
35°	1066.8
37.5°	958.4
40°	833.1
42.5°	707.8
45°	589.3
47.5°	477.5
50°	379.3
52.5°	287.9
55°	213.4
57.5°	152.4
60°	105.0
62.5°	77.9
65°	57.6
67.5°	44.0
70°	30.5
72.5°	23.7
75°	16.9
77.5°	10.2
80°	6.8
82.5°	3.4
85°	3.4
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)