

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P203146

Luminaire Tested: **LSR6B30D010BZ EC6B30508030 6LBWMW1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P203146  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR6B30D010BZ EC6B30508030 6LBWMW1  
Description: PORTFOLIO 6IN CYLINDER  
WIDE DISTRIBUTION WITH MATTE WHITE TRIM  
WATTAGE D010TR-27.4 W DE010-27.95 W D5LT-27.65 W DMX-27.73 W DL2-29.56 W  
DL3-29.67 W DLE-29.73 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2793.1 lumens  
Efficiency: N/A  
Efficacy: 99.8 lumens/watt  
Spacing Criteria (0/90/45): 1.13 / 1.13 / 1.15  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 28  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P203146

CATALOG NUMBER: LSR6B30D010BZ EC6B30508030 6LBWMW1

### Luminous Intensity Polar Plot

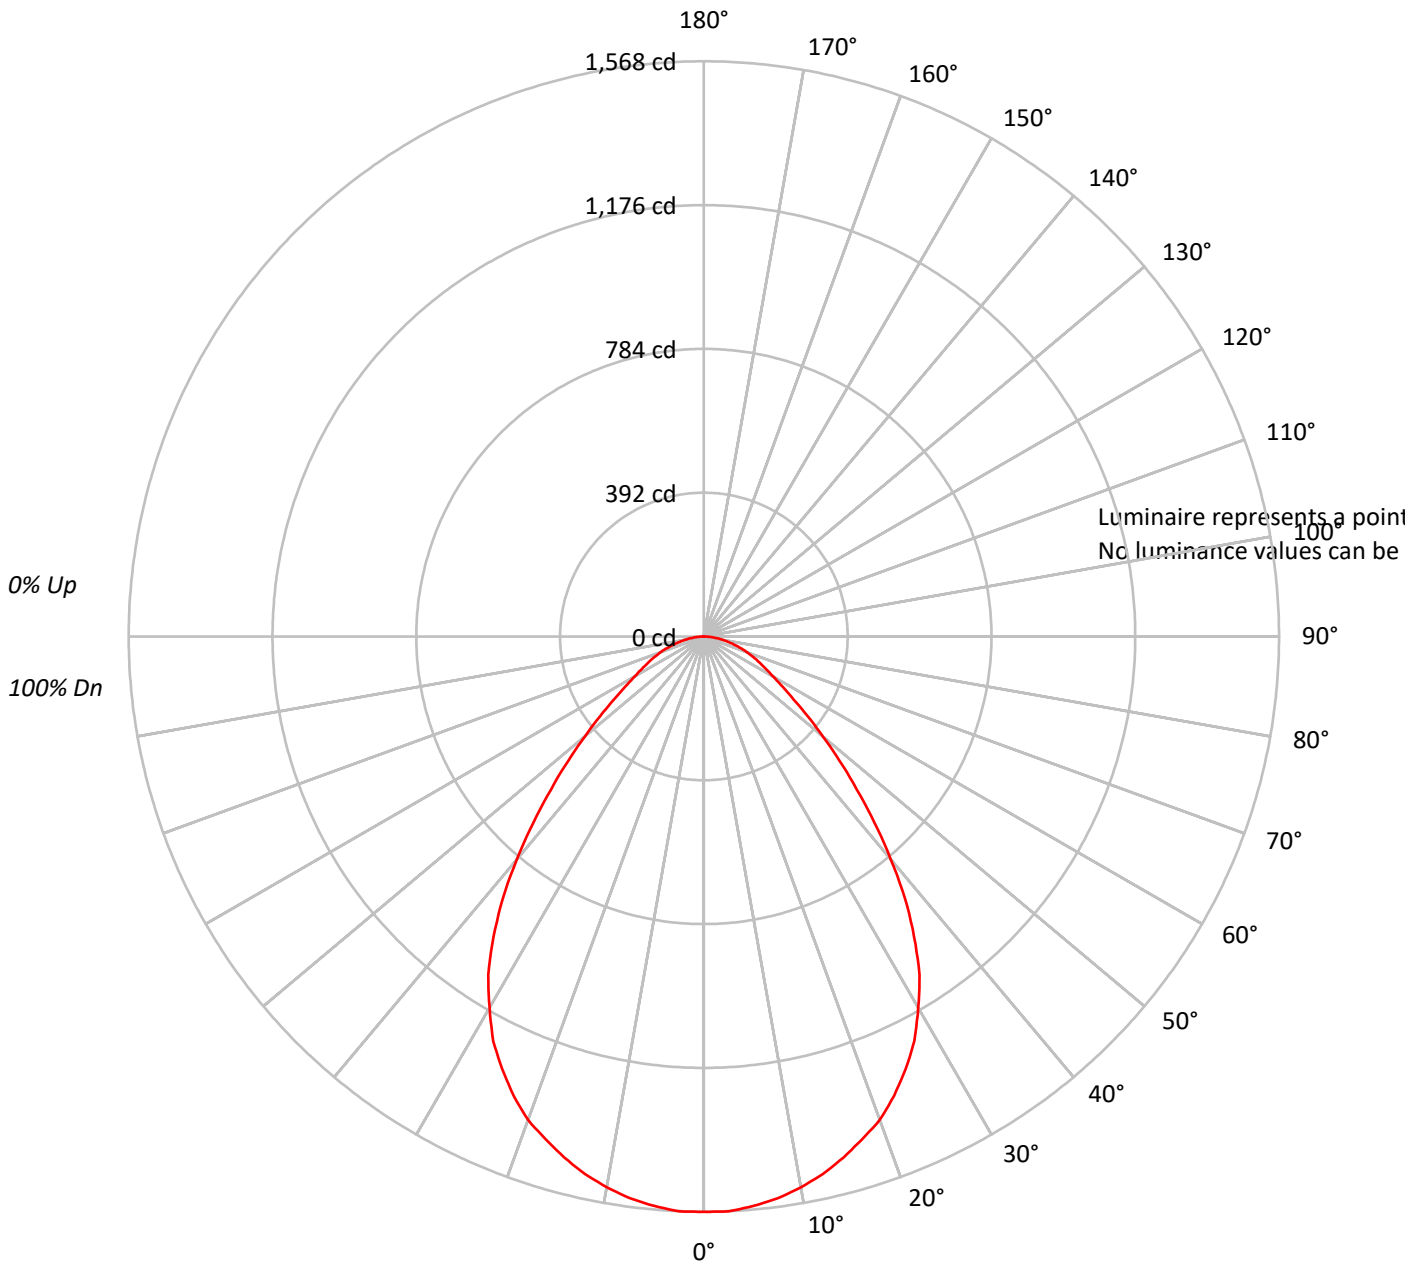



TEST NUMBER: P203146

CATALOG NUMBER: LSR6B30D010BZ EC6B30508030 6LBWMW1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	104	100	108	105	102	99	101	98	96	97	95	93	93	92	90	88			
2	103	96	90	86	100	94	89	85	91	86	83	88	84	81	85	82	79	77			
3	95	86	80	74	93	85	79	74	82	77	72	80	75	71	77	73	70	68			
4	89	78	71	65	86	77	70	65	75	69	64	72	67	63	70	66	62	60			
5	82	71	64	58	80	70	63	58	68	62	57	66	61	56	65	60	56	54			
6	77	65	57	52	75	64	57	52	63	56	51	61	55	51	60	54	50	49			
7	72	60	52	47	70	59	52	47	58	51	46	56	50	46	55	50	46	44			
8	67	55	48	42	66	55	47	42	53	47	42	52	46	42	51	46	42	40			
9	63	51	44	39	62	51	44	39	50	43	39	49	43	38	48	42	38	37			
10	60	48	40	36	58	47	40	36	46	40	36	45	40	35	45	39	35	34			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P203146

CATALOG NUMBER: LSR6B30D010BZ EC6B30508030 6LBWMW1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	147.7	5.3
10°-20°	414.3	14.8
20°-30°	596.9	21.4
30°-40°	619.7	22.2
40°-50°	458.2	16.4
50°-60°	273.7	9.8
60°-70°	166.3	6.0
70°-80°	91.1	3.3
80°-90°	25.4	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1158.8	41.5
0°-40°	1778.5	63.7
0°-60°	2510.4	89.9
0°-90°	2793.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2793.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1568	
5°	1558	148
15°	1470	414
25°	1301	597
35°	999	620
45°	590	458
55°	298	274
65°	166	166
75°	85	91
85°	20	25
90°	0	



TEST NUMBER: P203146

CATALOG NUMBER: LSR6B30D010BZ EC6B30508030 6LBWMW1

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1568.5
2.5°	1568.5
5°	1558.3
7.5°	1544.8
10°	1524.5
12.5°	1500.7
15°	1470.3
17.5°	1436.4
20°	1402.5
22.5°	1355.1
25°	1300.9
27.5°	1243.3
30°	1168.8
32.5°	1094.2
35°	999.4
37.5°	901.1
40°	792.7
42.5°	687.7
45°	589.5
47.5°	501.4
50°	423.5
52.5°	355.7
55°	298.1
57.5°	254.1
60°	216.8
62.5°	189.7
65°	166.0
67.5°	145.7
70°	125.3
72.5°	105.0
75°	84.7
77.5°	67.8
80°	50.8
82.5°	37.3
85°	20.3
87.5°	10.2
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)