

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P203152

Luminaire Tested: **LSR6B30D010BZ EC6B30509030 6LBWMW1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P203152  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR6B30D010BZ EC6B30509030 6LBWMW1  
Description: PORTFOLIO 6IN CYLINDER  
WIDE DISTRIBUTION WITH MATTE WHITE TRIM  
WATTAGE D010TR-27.4 W DE010-27.95 W D5LT-27.65 W DMX-27.73 W DL2-29.56 W  
DL3-29.67 W DLE-29.73 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2385.4 lumens  
Efficiency: N/A  
Efficacy: 85.2 lumens/watt  
Spacing Criteria (0/90/45): 1.13 / 1.13 / 1.15  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 28  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P203152

CATALOG NUMBER: LSR6B30D010BZ EC6B30509030 6LBWMW1

### Luminous Intensity Polar Plot

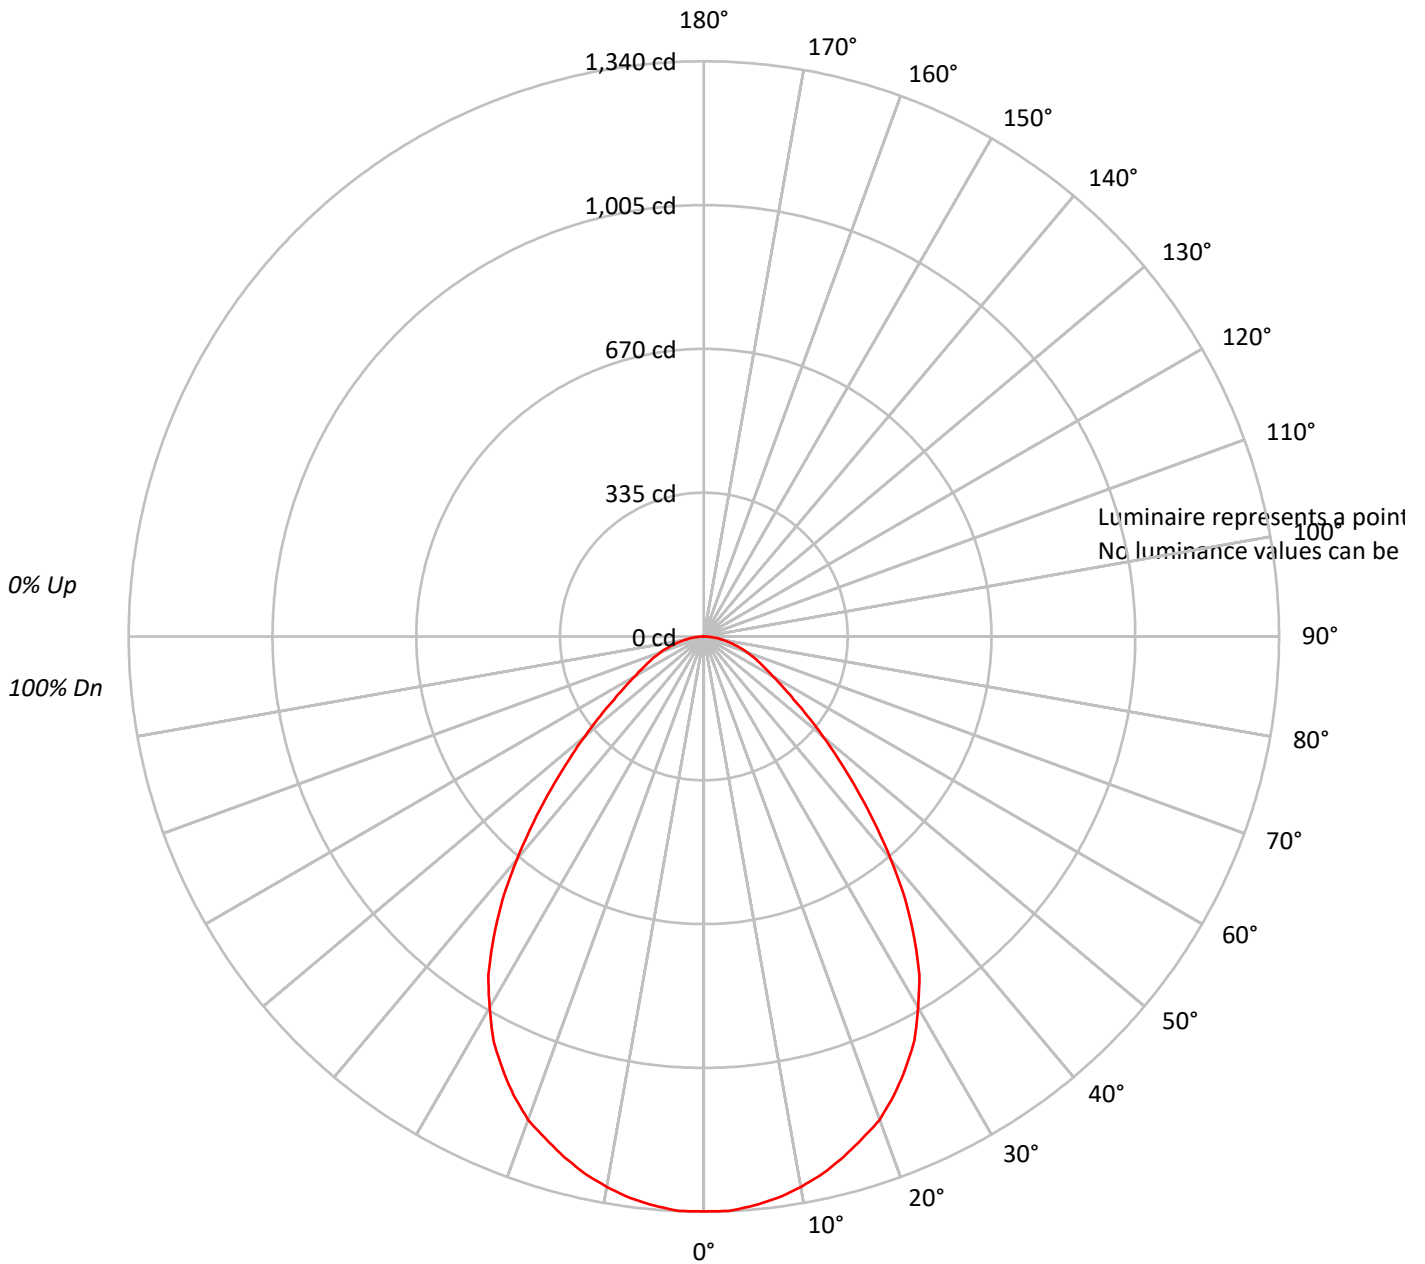



TEST NUMBER: P203152

CATALOG NUMBER: LSR6B30D010BZ EC6B30509030 6LBWMW1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	111	107	104	100	108	105	102	99	101	98	96	97	95	93	93	92	90	88																			
2	103	96	90	86	100	94	89	85	91	86	83	88	84	81	85	82	79	77																			
3	95	86	80	74	93	85	79	74	82	77	72	80	75	71	77	73	70	68																			
4	89	78	71	65	86	77	70	65	75	69	64	72	67	63	70	66	62	60																			
5	82	71	64	58	80	70	63	58	68	62	57	66	61	56	65	60	56	54																			
6	77	65	57	52	75	64	57	52	63	56	51	61	55	51	60	54	50	49																			
7	72	60	52	47	70	59	52	47	58	51	46	56	50	46	55	50	46	44																			
8	67	55	48	42	66	55	47	42	53	47	42	52	46	42	51	46	42	40																			
9	63	51	44	39	62	51	44	39	50	43	39	49	43	38	48	42	38	37																			
10	60	48	40	36	58	47	40	36	46	40	36	45	40	35	45	39	35	34																			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P203152

CATALOG NUMBER: LSR6B30D010BZ EC6B30509030 6LBWMW1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	126.2	5.3
10°-20°	353.8	14.8
20°-30°	509.7	21.4
30°-40°	529.2	22.2
40°-50°	391.3	16.4
50°-60°	233.7	9.8
60°-70°	142.0	6.0
70°-80°	77.8	3.3
80°-90°	21.7	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	989.7	41.5
0°-40°	1518.9	63.7
0°-60°	2143.9	89.9
0°-90°	2385.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2385.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1340	
5°	1331	126
15°	1256	354
25°	1111	510
35°	854	529
45°	503	391
55°	255	234
65°	142	142
75°	72	78
85°	17	22
90°	0	



TEST NUMBER: P203152

CATALOG NUMBER: LSR6B30D010BZ EC6B30509030 6LBWMW1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1339.5
2.5°	1339.5
5°	1330.9
7.5°	1319.3
10°	1301.9
12.5°	1281.7
15°	1255.6
17.5°	1226.7
20°	1197.8
22.5°	1157.3
25°	1111.0
27.5°	1061.8
30°	998.1
32.5°	934.5
35°	853.5
37.5°	769.6
40°	677.0
42.5°	587.3
45°	503.4
47.5°	428.2
50°	361.6
52.5°	303.8
55°	254.6
57.5°	217.0
60°	185.2
62.5°	162.0
65°	141.8
67.5°	124.4
70°	107.0
72.5°	89.7
75°	72.3
77.5°	57.9
80°	43.4
82.5°	31.8
85°	17.4
87.5°	8.7
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)