

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P205104

Luminaire Tested: **LSR6B30D010BZ EC6B30508035 6LBMLI1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P205104
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR6B30D010BZ EC6B30508035 6LBMLI1
Description: PORTFOLIO 6IN CYLINDER
MEDIUM DISTRIBUTION WITH SPECULAR CLEAR TRIM
WATTAGE D010TR-27.4 W DE010-27.95 W D5LT-27.65 W DMX-27.73 W DL2-29.56 W
DL3-29.67 W DLE-29.73 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2709.7 lumens
Efficiency: N/A
Efficacy: 96.8 lumens/watt
Spacing Criteria (0/90/45): 0.85 / 0.85 / 0.85
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P205104

CATALOG NUMBER: LSR6B30D010BZ EC6B30508035 6LBMLI1

Luminous Intensity Polar Plot

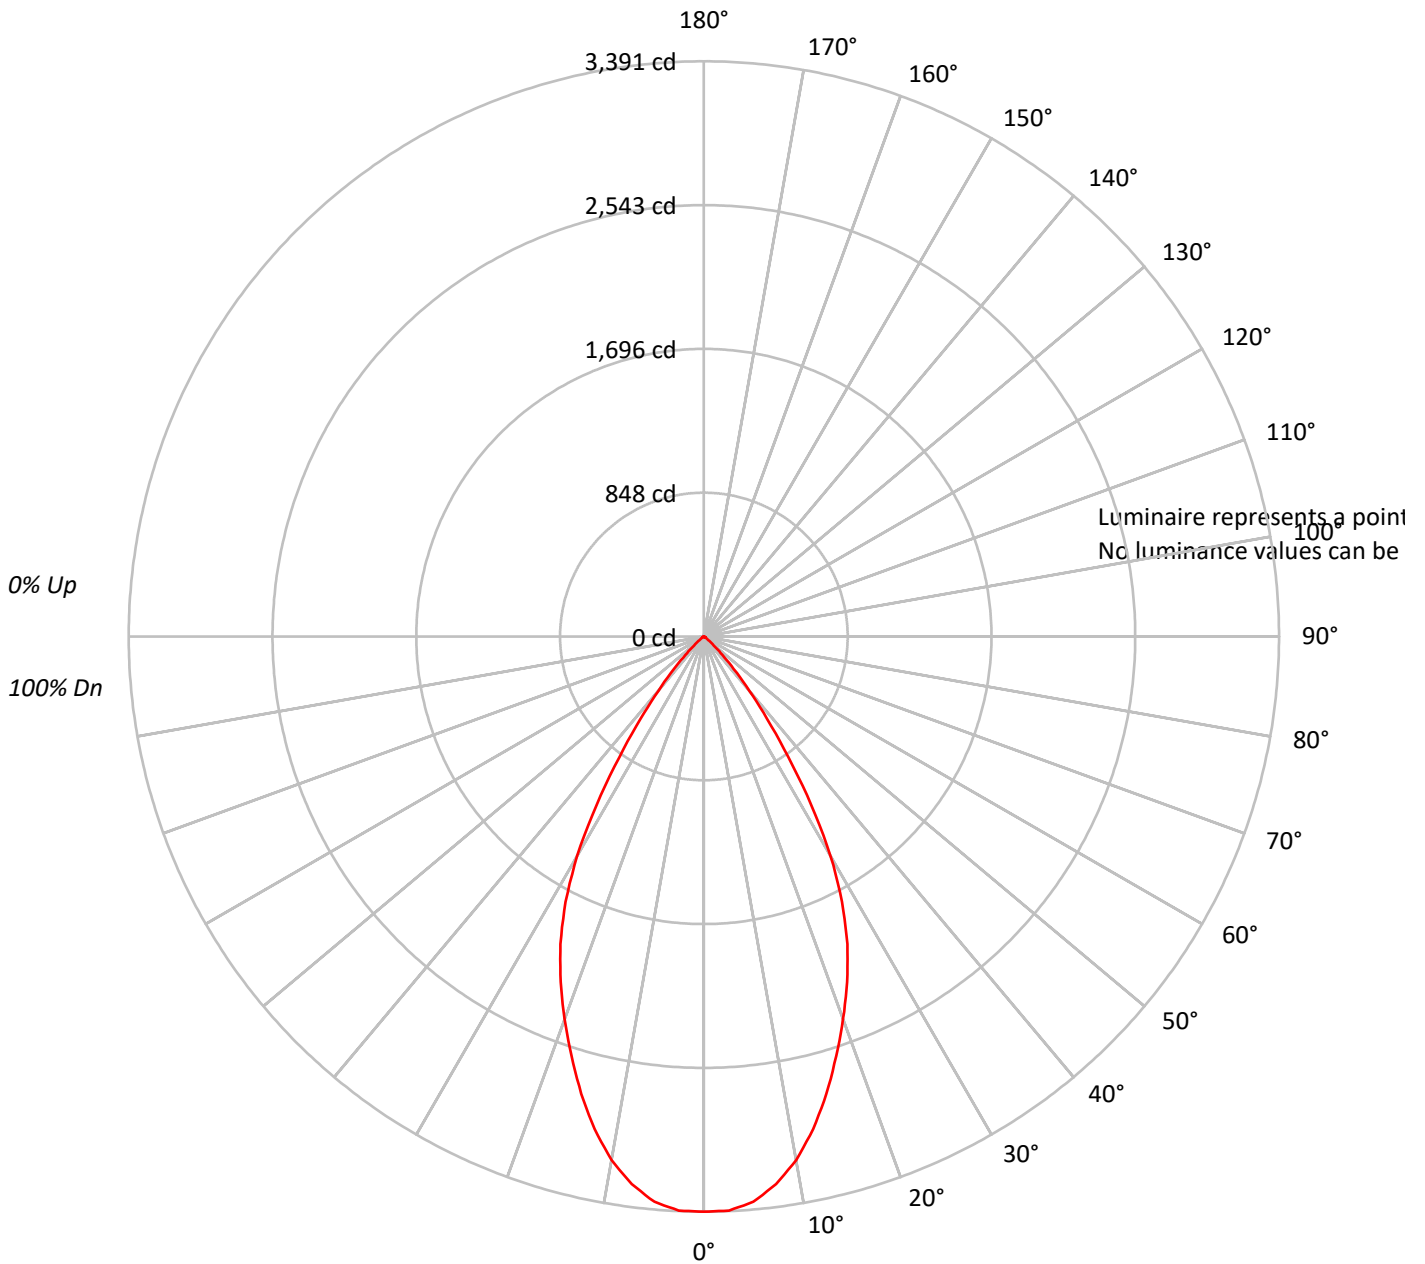



TEST NUMBER: P205104

CATALOG NUMBER: LSR6B30D010BZ EC6B30508035 6LBML11

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20																	
RC	80									70									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																					
RCR																																																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																																				
1	114	111	109	106	111	109	107	105	105	103	101	101	100	98	98	97	96	94																																				
2	108	103	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88																																				
3	103	97	92	88	101	95	91	87	93	89	86	90	87	85	88	85	83	82																																				
4	98	91	85	81	96	89	84	81	87	83	80	85	82	79	83	80	78	76																																				
5	93	85	79	75	91	84	79	75	82	78	74	81	77	73	79	76	73	71																																				
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67																																				
7	84	75	69	65	83	75	69	65	73	68	65	72	68	64	71	67	64	63																																				
8	80	71	65	61	79	70	65	61	69	64	61	68	64	60	67	63	60	59																																				
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55																																				
10	73	64	58	54	72	63	58	54	62	57	54	62	57	54	61	57	54	52																																				

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P205104

CATALOG NUMBER: LSR6B30D010BZ EC6B30508035 6LBML11

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	312.4	11.5
10°-20°	777.7	28.7
20°-30°	904.1	33.4
30°-40°	553.6	20.4
40°-50°	137.5	5.1
50°-60°	16.1	0.6
60°-70°	6.0	0.2
70°-80°	2.3	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1994.2	73.6
0°-40°	2547.8	94.0
0°-60°	2701.4	99.7
0°-90°	2709.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2709.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3391	
5°	3346	312
15°	2791	778
25°	2001	904
35°	867	554
45°	153	137
55°	14	16
65°	7	6
75°	4	2
85°	0	0
90°	0	



TEST NUMBER: P205104

CATALOG NUMBER: LSR6B30D010BZ EC6B30508035 6LBMLI1

CANDELA DISTRIBUTION (FULL):

	0°
0°	3391.0
2.5°	3387.5
5°	3345.9
7.5°	3255.8
10°	3134.4
12.5°	2974.9
15°	2791.2
17.5°	2593.5
20°	2399.4
22.5°	2205.2
25°	2000.6
27.5°	1764.8
30°	1494.4
32.5°	1178.9
35°	866.8
37.5°	610.2
40°	416.1
42.5°	260.0
45°	152.6
47.5°	86.7
50°	45.1
52.5°	20.8
55°	13.9
57.5°	10.4
60°	10.4
62.5°	6.9
65°	6.9
67.5°	3.5
70°	3.5
72.5°	3.5
75°	3.5
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)