

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P202941

Luminaire Tested: **LSR6B30D010BZ EC6B30508035 6LBWGPH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P202941
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR6B30D010BZ EC6B30508035 6LBWGPH1
Description: PORTFOLIO 6IN CYLINDER
WIDE DISTRIBUTIONWITH GRAPHITE HAZE TRIM
WATTAGE D010TR-27.4 W DE010-27.95 W D5LT-27.65 W DMX-27.73 W DL2-29.56 W
DL3-29.67 W DLE-29.73 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2015.7 lumens
Efficiency: N/A
Efficacy: 72.0 lumens/watt
Spacing Criteria (0/90/45): 1.11 / 1.11 / 1.11
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P202941

CATALOG NUMBER: LSR6B30D010BZ EC6B30508035 6LBWGPH1

Luminous Intensity Polar Plot

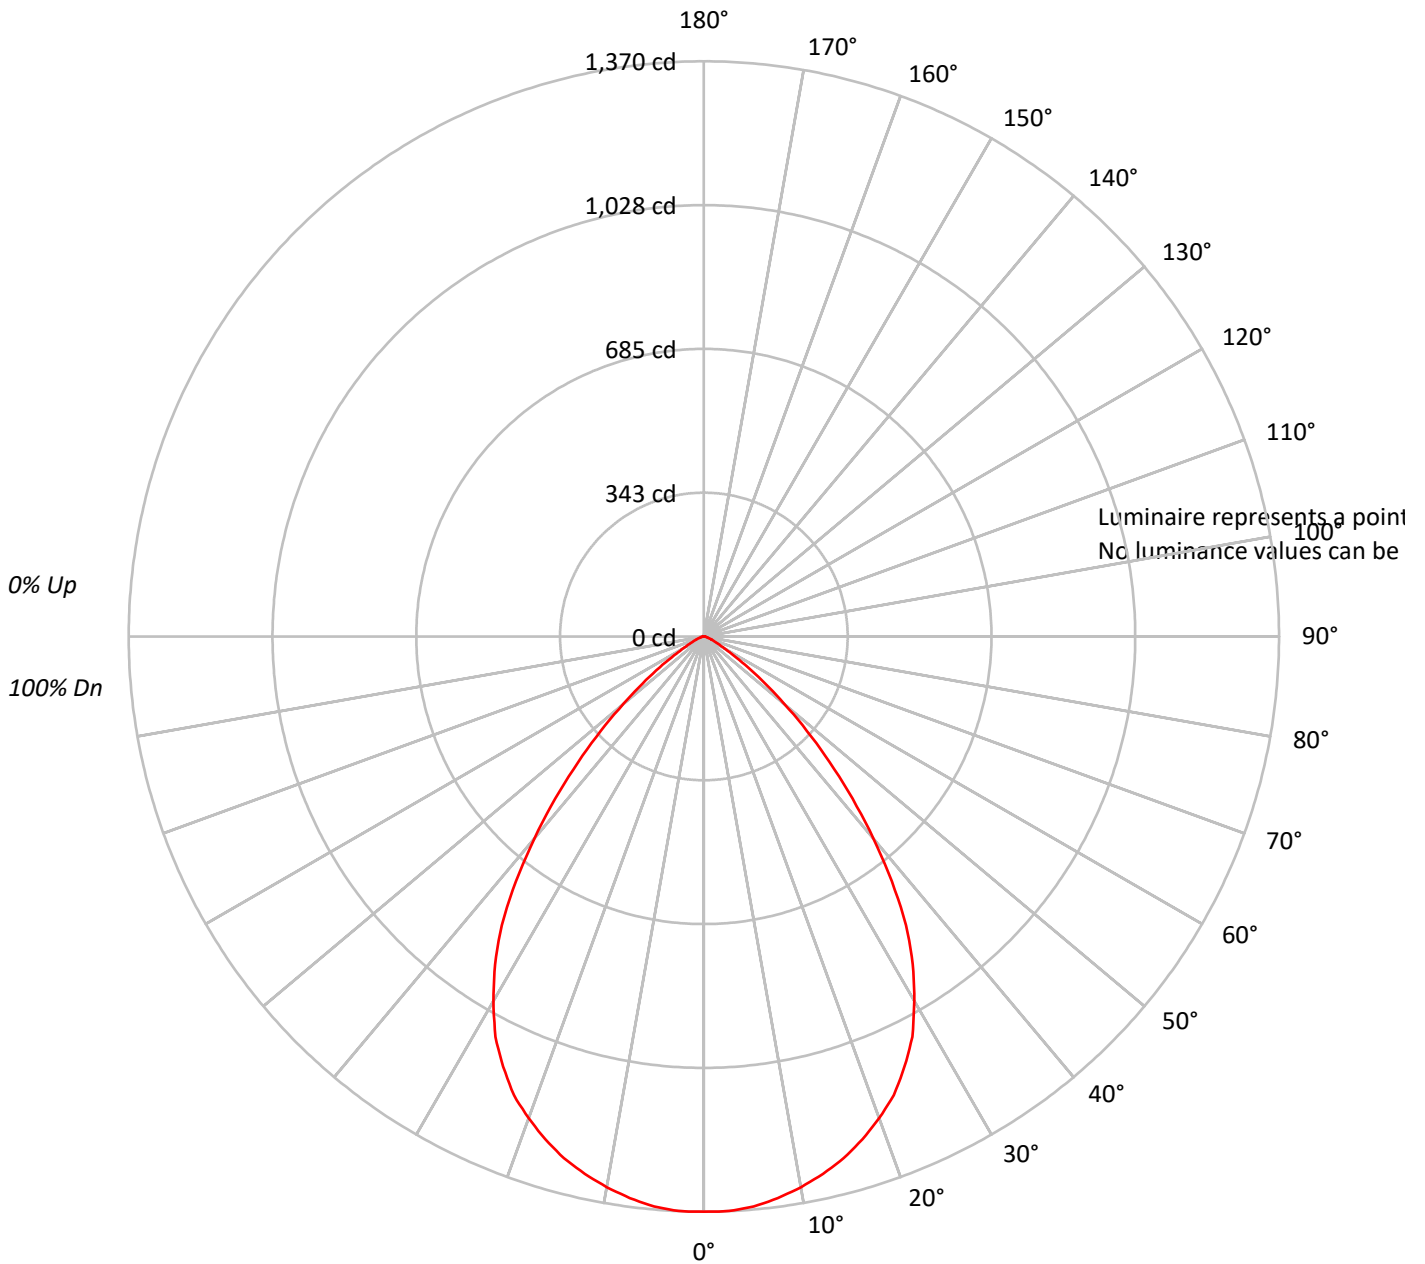



TEST NUMBER: P202941

CATALOG NUMBER: LSR6B30D010BZ EC6B30508035 6LBWGPH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91		
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	86	84	82		
3	99	91	85	81	97	90	84	80	87	82	79	85	81	77	82	79	76	74		
4	93	84	77	72	91	82	76	72	80	75	71	78	74	70	76	72	69	67		
5	87	77	70	65	85	76	69	65	74	68	64	72	67	63	71	66	63	61		
6	81	71	64	59	80	70	63	59	68	62	58	67	62	58	65	61	57	56		
7	76	65	58	53	75	65	58	53	63	57	53	62	57	53	61	56	52	51		
8	72	61	54	49	70	60	53	49	59	53	49	58	52	48	57	52	48	47		
9	68	57	50	45	66	56	49	45	55	49	45	54	48	45	53	48	44	43		
10	64	53	46	42	63	52	46	42	51	45	41	51	45	41	50	45	41	40		

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P202941

CATALOG NUMBER: LSR6B30D010BZ EC6B30508035 6LBWGPH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	129.1	6.4
10°-20°	361.9	18.0
20°-30°	517.8	25.7
30°-40°	516.1	25.6
40°-50°	328.7	16.3
50°-60°	121.2	6.0
60°-70°	30.3	1.5
70°-80°	9.1	0.5
80°-90°	1.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1008.8	50.0
0°-40°	1524.9	75.7
0°-60°	1974.9	98.0
0°-90°	2015.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2015.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1370	
5°	1363	129
15°	1287	362
25°	1131	518
35°	839	516
45°	423	329
55°	128	121
65°	28	30
75°	7	9
85°	0	1
90°	0	



TEST NUMBER: P202941

CATALOG NUMBER: LSR6B30D010BZ EC6B30508035 6LBWGPH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1370.0
2.5°	1370.0
5°	1363.1
7.5°	1349.2
10°	1331.9
12.5°	1311.0
15°	1286.8
17.5°	1255.6
20°	1220.9
22.5°	1182.7
25°	1130.7
27.5°	1075.2
30°	1002.4
32.5°	926.1
35°	839.3
37.5°	735.3
40°	627.8
42.5°	523.7
45°	423.1
47.5°	333.0
50°	249.7
52.5°	183.8
55°	128.3
57.5°	83.2
60°	55.5
62.5°	38.2
65°	27.7
67.5°	20.8
70°	17.3
72.5°	10.4
75°	6.9
77.5°	6.9
80°	3.5
82.5°	3.5
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)