

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P203781

Luminaire Tested: **LSR6B40D010BZ EC6B30509024 6LBNWH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P203781  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR6B40D010BZ EC6B30509024 6LBNWH1  
Description: PORTFOLIO 6IN CYLINDER  
NARROW DISTRIBUTION WITH WHEAT TRIM  
WATTAGE D010TR-43.02 W DE010-42.54 W D5LT-42.539 W DMX-41.87 W DL2-41.57  
W DL3-44.71 W DLE-39.33 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2033.7 lumens  
Efficiency: N/A  
Efficacy: 48.7 lumens/watt  
Spacing Criteria (0/90/45): 0.56 / 0.56 / 0.64  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 41.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P203781

CATALOG NUMBER: LSR6B40D010BZ EC6B30509024 6LBNWH1

### Luminous Intensity Polar Plot

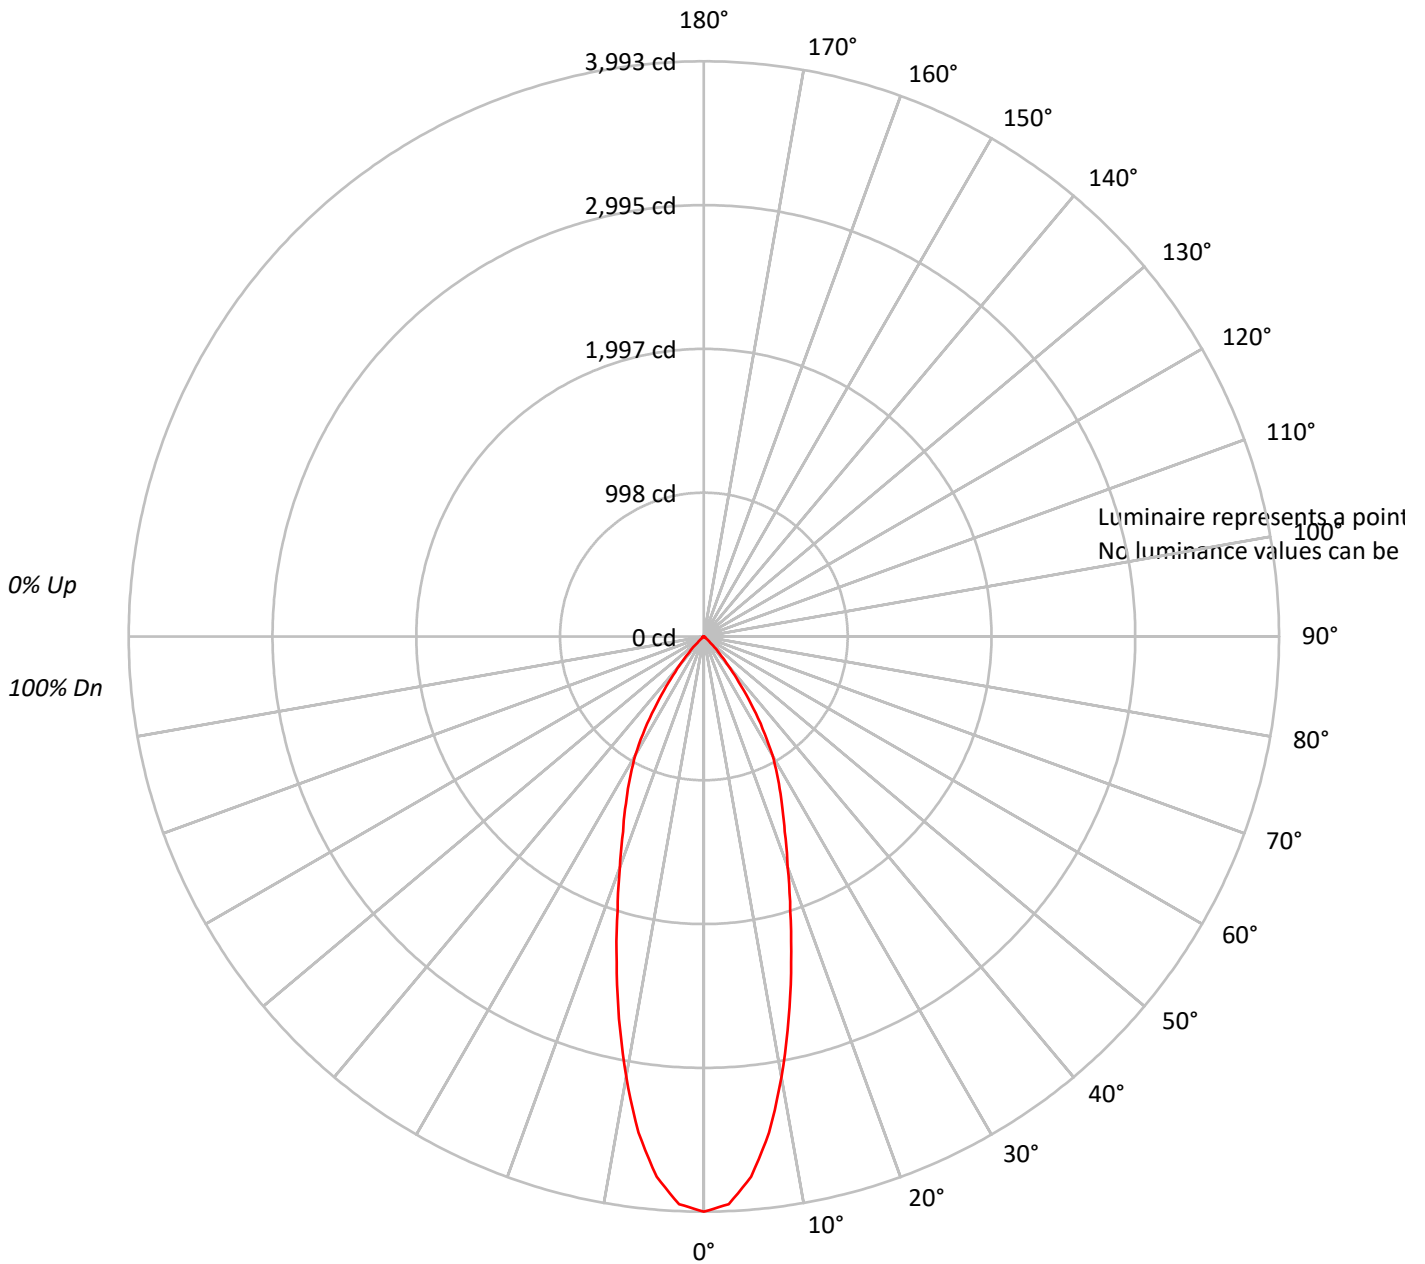



TEST NUMBER: P203781

CATALOG NUMBER: LSR6B40D010BZ EC6B30509024 6LBNWH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  | 0   |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 0   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |
| 1   | 114 | 111 | 109 | 107 | 112 | 109 | 107 | 105 | 105 | 104 | 102 | 101 | 100 | 99  | 98  | 97  | 96  | 94  |
| 2   | 109 | 104 | 101 | 97  | 107 | 103 | 99  | 96  | 99  | 97  | 94  | 96  | 94  | 92  | 94  | 92  | 90  | 89  |
| 3   | 104 | 98  | 93  | 90  | 102 | 97  | 92  | 89  | 94  | 91  | 88  | 92  | 89  | 86  | 89  | 87  | 85  | 83  |
| 4   | 99  | 92  | 87  | 83  | 97  | 91  | 86  | 83  | 89  | 85  | 82  | 87  | 84  | 81  | 85  | 82  | 80  | 79  |
| 5   | 95  | 87  | 82  | 78  | 93  | 86  | 81  | 77  | 84  | 80  | 77  | 83  | 79  | 76  | 81  | 78  | 75  | 74  |
| 6   | 91  | 82  | 77  | 73  | 89  | 82  | 76  | 73  | 80  | 76  | 72  | 79  | 75  | 72  | 78  | 74  | 71  | 70  |
| 7   | 87  | 78  | 73  | 69  | 85  | 77  | 72  | 69  | 76  | 72  | 68  | 75  | 71  | 68  | 74  | 70  | 67  | 66  |
| 8   | 83  | 74  | 69  | 65  | 82  | 74  | 68  | 65  | 73  | 68  | 65  | 72  | 67  | 64  | 71  | 67  | 64  | 63  |
| 9   | 79  | 71  | 65  | 62  | 78  | 70  | 65  | 61  | 69  | 65  | 61  | 68  | 64  | 61  | 68  | 64  | 61  | 60  |
| 10  | 76  | 67  | 62  | 58  | 75  | 67  | 62  | 58  | 66  | 61  | 58  | 65  | 61  | 58  | 65  | 61  | 58  | 57  |

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P203781

CATALOG NUMBER: LSR6B40D010BZ EC6B30509024 6LBNWH1

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 338.0  | 16.6      |
| 10°-20°   | 649.5  | 31.9      |
| 20°-30°   | 590.4  | 29.0      |
| 30°-40°   | 357.9  | 17.6      |
| 40°-50°   | 81.5   | 4.0       |
| 50°-60°   | 10.4   | 0.5       |
| 60°-70°   | 4.7    | 0.2       |
| 70°-80°   | 1.4    | 0.1       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 1577.9 | 77.6      |
| 0°-40°    | 1935.8 | 95.2      |
| 0°-60°    | 2027.7 | 99.7      |
| 0°-90°    | 2033.7 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 2033.7 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 3993 |      |
| 5°  | 3764 | 338  |
| 15° | 2339 | 649  |
| 25° | 1280 | 590  |
| 35° | 567  | 358  |
| 45° | 90   | 81   |
| 55° | 10   | 10   |
| 65° | 4    | 5    |
| 75° | 0    | 1    |
| 85° | 0    | 0    |
| 90° | 0    |      |



TEST NUMBER: P203781

CATALOG NUMBER: LSR6B40D010BZ EC6B30509024 6LBNWH1

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 3992.8 |
| 2.5°  | 3944.3 |
| 5°    | 3764.4 |
| 7.5°  | 3473.8 |
| 10°   | 3103.6 |
| 12.5° | 2719.5 |
| 15°   | 2338.9 |
| 17.5° | 1992.9 |
| 20°   | 1702.3 |
| 22.5° | 1467.0 |
| 25°   | 1280.2 |
| 27.5° | 1114.1 |
| 30°   | 951.5  |
| 32.5° | 761.2  |
| 35°   | 567.4  |
| 37.5° | 397.9  |
| 40°   | 263.0  |
| 42.5° | 162.6  |
| 45°   | 90.0   |
| 47.5° | 41.5   |
| 50°   | 17.3   |
| 52.5° | 13.8   |
| 55°   | 10.4   |
| 57.5° | 10.4   |
| 60°   | 6.9    |
| 62.5° | 6.9    |
| 65°   | 3.5    |
| 67.5° | 3.5    |
| 70°   | 3.5    |
| 72.5° | 3.5    |
| 75°   | 0.0    |
| 77.5° | 0.0    |
| 80°   | 0.0    |
| 82.5° | 0.0    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)