

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P204291

Luminaire Tested: **LSR6B40D010BZ EC6B30508027 6LBSWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204291
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR6B40D010BZ EC6B30508027 6LBSWH1
Description: PORTFOLIO 6IN CYLINDER
SHALLOW DISTRIBUTION WITH WHEAT TRIM
WATTAGE D010TR-43.02 W DE010-42.54 W D5LT-42.539 W DMX-41.87 W DL2-41.57
W DL3-44.71 W DLE-39.33 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4184.8 lumens
Efficiency: N/A
Efficacy: 100.1 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1.08
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 41.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204291

CATALOG NUMBER: LSR6B40D010BZ EC6B30508027 6LBSWH1

Luminous Intensity Polar Plot

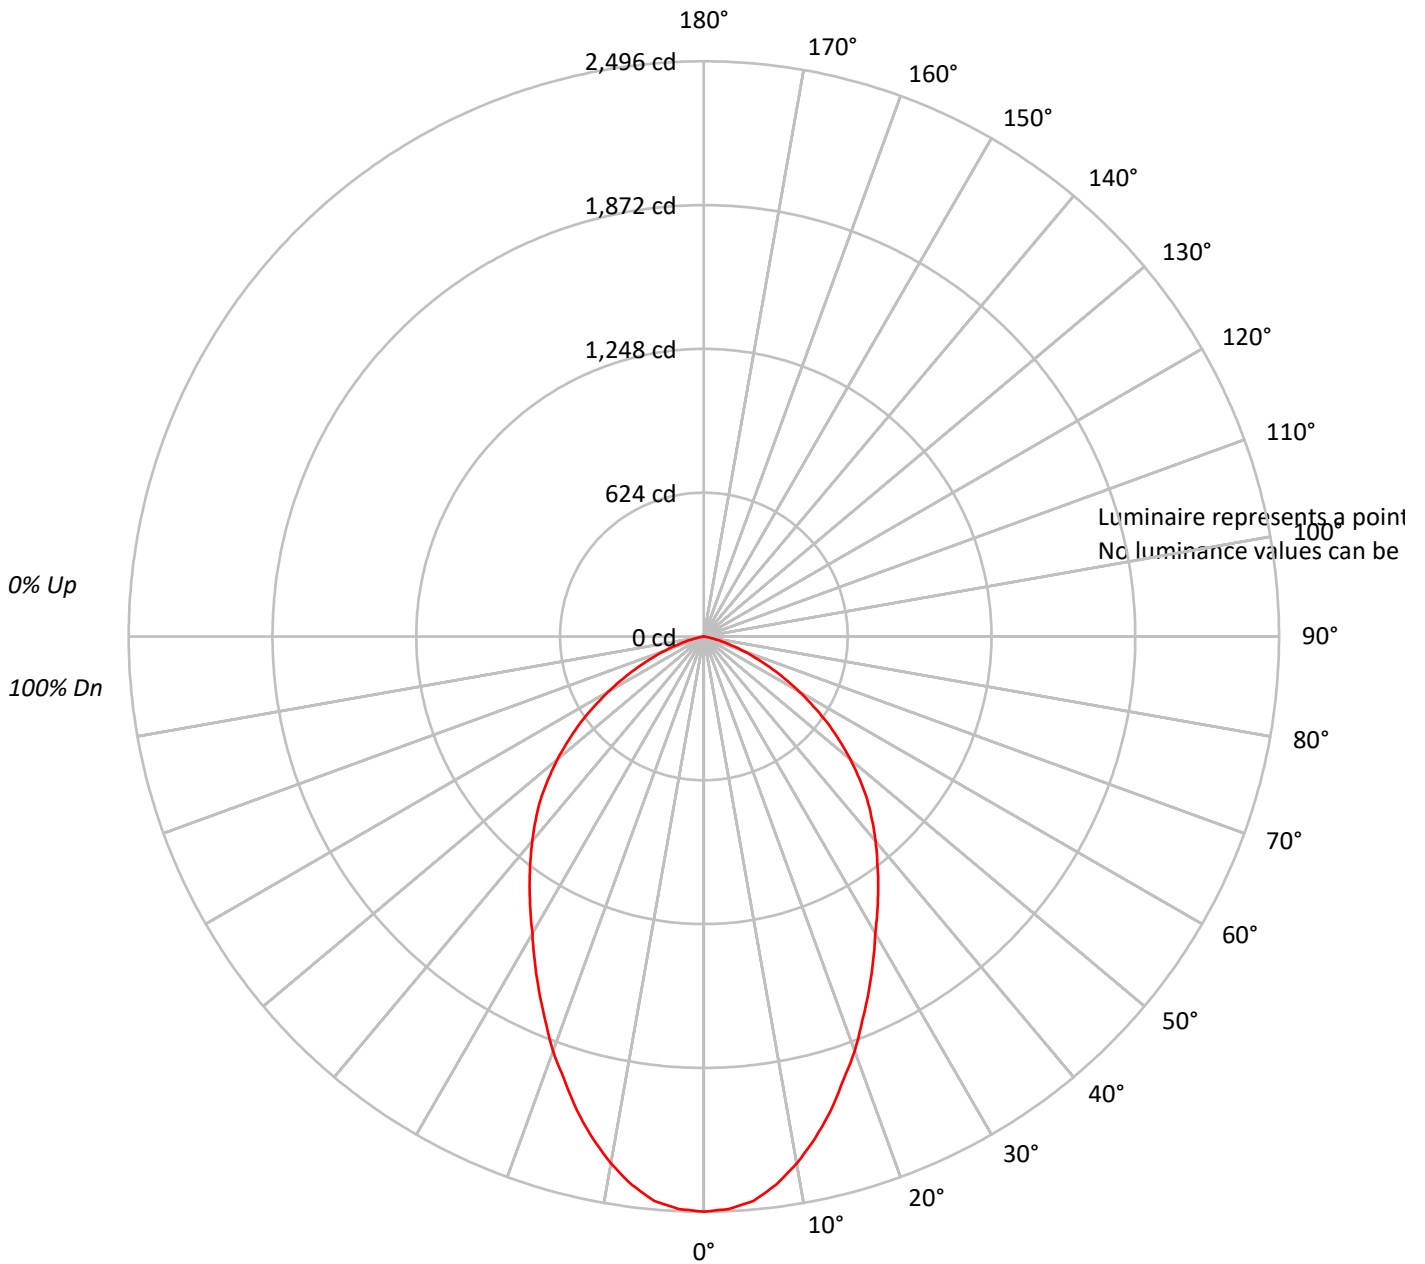



TEST NUMBER: P204291

CATALOG NUMBER: LSR6B40D010BZ EC6B30508027 6LBSWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	94	92	90	89																			
2	103	96	90	85	100	94	89	84	91	86	83	87	84	81	85	82	79	77																			
3	95	86	79	73	93	84	78	73	82	76	72	79	74	70	76	73	69	67																			
4	88	77	70	64	86	76	69	63	74	68	63	72	66	62	69	65	61	59																			
5	81	70	62	56	79	69	62	56	67	60	55	65	59	55	63	58	54	52																			
6	76	64	56	50	74	63	55	50	61	54	49	60	54	49	58	53	49	47																			
7	71	58	51	45	69	58	50	45	56	49	45	55	49	44	54	48	44	42																			
8	66	54	46	41	65	53	46	41	52	45	40	51	45	40	50	44	40	38																			
9	62	50	42	37	61	49	42	37	48	41	37	47	41	37	46	41	37	35																			
10	58	46	39	34	57	46	39	34	45	38	34	44	38	34	43	38	34	32																			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204291

CATALOG NUMBER: LSR6B40D010BZ EC6B30508027 6LBSWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	230.2	5.5
10°-20°	595.8	14.2
20°-30°	779.3	18.6
30°-40°	825.2	19.7
40°-50°	769.7	18.4
50°-60°	583.0	13.9
60°-70°	315.7	7.5
70°-80°	84.7	2.0
80°-90°	1.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1605.3	38.4
0°-40°	2430.5	58.1
0°-60°	3783.1	90.4
0°-90°	4184.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4184.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2496	
5°	2459	230
15°	2129	596
25°	1694	779
35°	1319	825
45°	1003	770
55°	655	583
65°	316	316
75°	73	85
85°	0	1
90°	0	



TEST NUMBER: P204291

CATALOG NUMBER: LSR6B40D010BZ EC6B30508027 6LBSWH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2495.8
2.5°	2486.6
5°	2459.1
7.5°	2399.6
10°	2321.8
12.5°	2230.2
15°	2129.4
17.5°	2014.9
20°	1914.2
22.5°	1799.7
25°	1694.4
27.5°	1589.1
30°	1488.3
32.5°	1401.3
35°	1318.9
37.5°	1236.4
40°	1158.6
42.5°	1080.7
45°	1002.9
47.5°	915.9
50°	828.9
52.5°	741.9
55°	654.9
57.5°	563.3
60°	476.3
62.5°	393.8
65°	316.0
67.5°	242.7
70°	178.6
72.5°	123.6
75°	73.3
77.5°	32.1
80°	9.2
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)