

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P205523

Luminaire Tested: **LSR6B40D010BZ EC6B30508030 6LBMGPH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P205523
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR6B40D010BZ EC6B30508030 6LBMGPH1
Description: PORTFOLIO 6IN CYLINDER
MEDIUM DISTRIBUTION WITH GRAPHITE HAZE TRIM
WATTAGE D010TR-43.02 W DE010-42.54 W D5LT-42.539 W DMX-41.87 W DL2-41.57
W DL3-44.71 W DLE-39.33 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2330.9 lumens
Efficiency: N/A
Efficacy: 55.8 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.91
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 41.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P205523

CATALOG NUMBER: LSR6B40D010BZ EC6B30508030 6LBMGPH1

Luminous Intensity Polar Plot

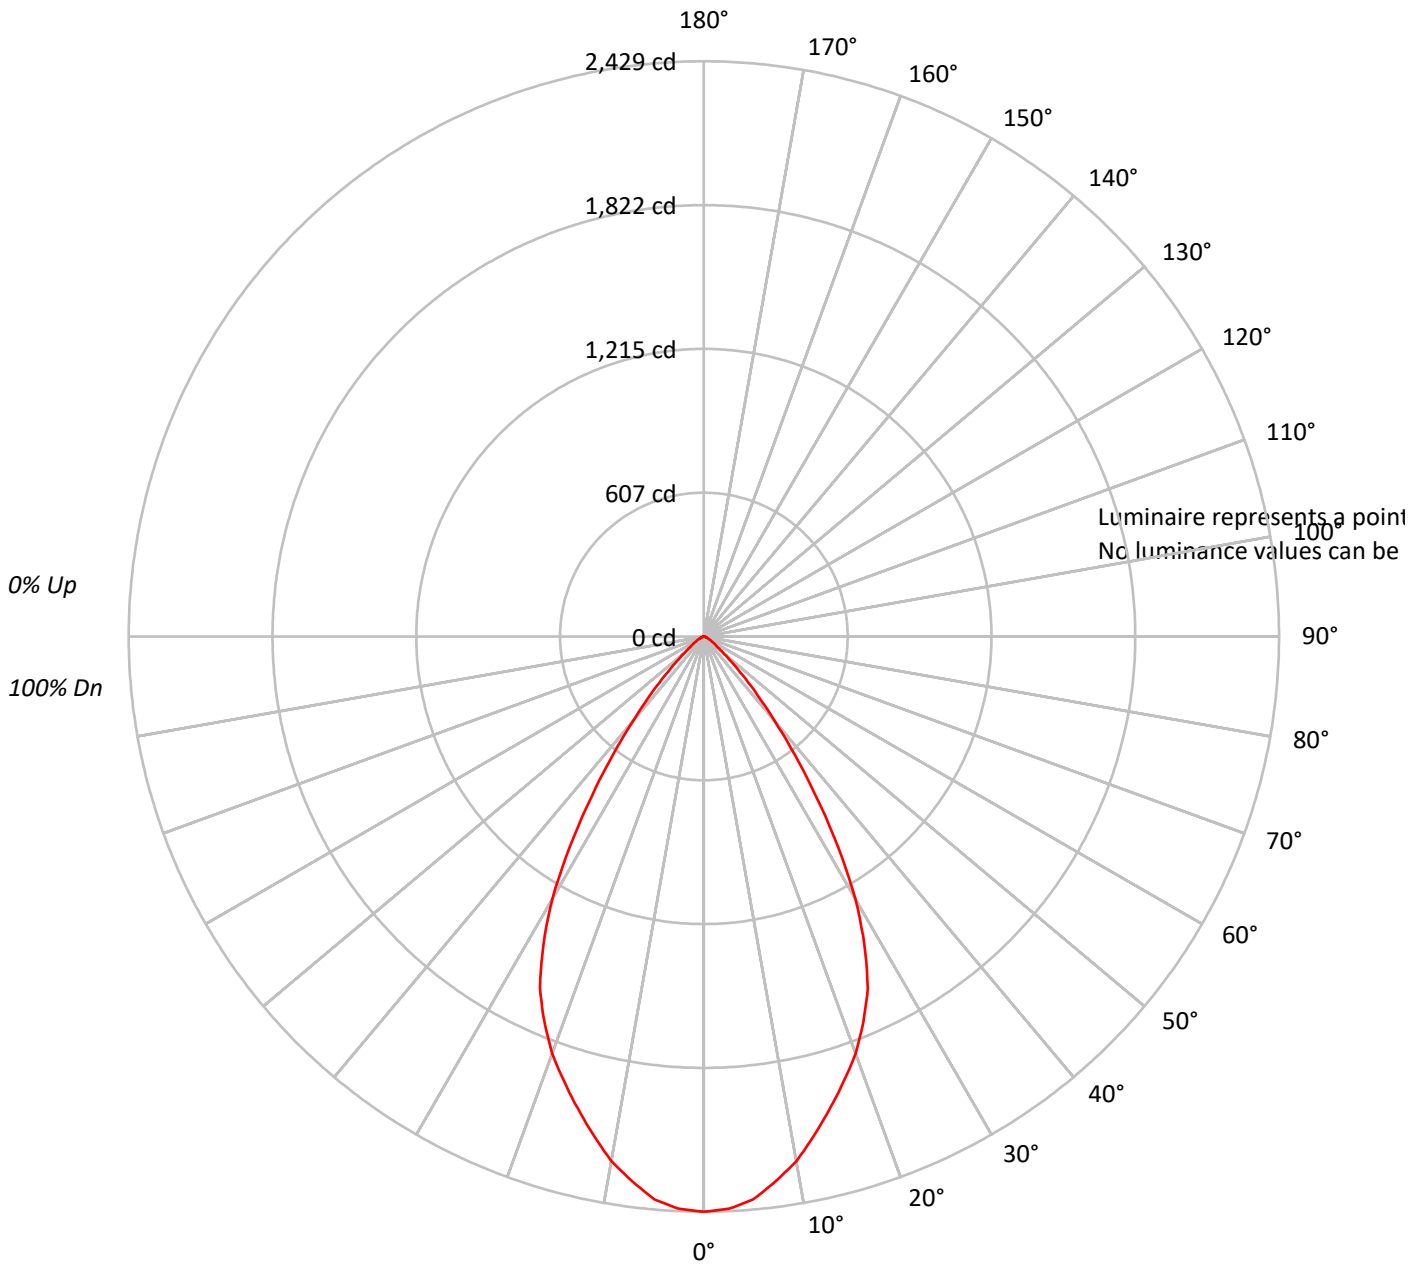



TEST NUMBER: P205523

CATALOG NUMBER: LSR6B40D010BZ EC6B30508030 6LBMGPH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93						93													
2	107	102	98	94	105	100	97	93	97	94	91	94	92	89	91	89	87	86						86													
3	102	95	90	85	100	93	89	85	91	87	83	88	85	82	86	83	81	79						79													
4	96	88	82	78	94	87	82	77	85	80	77	83	79	76	81	78	75	73						73													
5	91	82	76	72	89	81	76	71	79	74	71	78	73	70	76	72	69	68						68													
6	86	77	71	66	85	76	70	66	74	69	65	73	68	65	72	68	64	63						63													
7	82	72	66	61	80	71	65	61	70	65	61	69	64	60	68	63	60	59						59													
8	77	68	61	57	76	67	61	57	66	60	57	65	60	56	64	59	56	55						55													
9	74	64	57	53	72	63	57	53	62	57	53	61	56	53	60	56	53	51						51													
10	70	60	54	50	69	59	54	50	59	53	50	58	53	49	57	53	49	48						48													

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P205523

CATALOG NUMBER: LSR6B40D010BZ EC6B30508030 6LBMGPH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	223.1	9.6
10°-20°	579.0	24.8
20°-30°	737.7	31.6
30°-40°	521.4	22.4
40°-50°	190.3	8.2
50°-60°	52.8	2.3
60°-70°	19.1	0.8
70°-80°	6.8	0.3
80°-90°	0.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1539.9	66.1
0°-40°	2061.3	88.4
0°-60°	2304.4	98.9
0°-90°	2330.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2330.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2429	
5°	2387	223
15°	2062	579
25°	1638	738
35°	828	521
45°	231	190
55°	56	53
65°	19	19
75°	5	7
85°	0	1
90°	0	



TEST NUMBER: P205523

CATALOG NUMBER: LSR6B40D010BZ EC6B30508030 6LBMGPH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2429.0
2.5°	2419.6
5°	2386.6
7.5°	2320.7
10°	2250.1
12.5°	2155.9
15°	2061.8
17.5°	1967.7
20°	1873.5
22.5°	1760.5
25°	1638.1
27.5°	1468.7
30°	1280.4
32.5°	1054.4
35°	828.5
37.5°	630.8
40°	461.3
42.5°	334.2
45°	230.7
47.5°	155.3
50°	103.6
52.5°	70.6
55°	56.5
57.5°	42.4
60°	33.0
62.5°	23.5
65°	18.8
67.5°	14.1
70°	9.4
72.5°	9.4
75°	4.7
77.5°	4.7
80°	4.7
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)